		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App E Section
			CPG-489 CPG-495 CPG-496 CPG-497 CPG-503 CPG-536 CPG-2470 CPG-2650 CPG-2652	CPGX- 6014 CPGX- 6016	3.2.1.8.1.0-6 3.2.1.8.1.0-9 3.2.1.8.1.0-12 3.2.1.8.2.0-4 3.2.1.8.1.0-5 3.2.1.8.1.0-7 3.2.1.8.1.0-4 3.2.1.8.1.0-4	0-1.0- 2.0-3.0- 0-1.0- 2.0-3.0-
A- 1761	3.2.1.3.6.1.0-5	b(3)	CPG-479 CPG-489 CPG-495 CPG-496 CPG-497 CPG-503 CPG-536 CPG-2470 CPG-2650 CPG-2652	CPGX- 6013 CPGX- 6014 CPGX- 6016	3.2.1.8.1.0-2 3.2.1.8.1.0-6 3.2.1.8.1.0-8 3.2.1.8.1.0-9 3.2.1.8.1.0-12 3.2.1.8.2.0-4 3.2.1.10.0-5 3.2.1.8.1.0-7 3.2.1.8.1.0-4 3.2.1.8.1.0-1	0-1.0- 2.0-3.0- 0-1.0- 2.0-3.0- 0-1.0- 2.0-3.0-
A- 1782	3.2.1.3.6.1.0-6	b(3)	CPG-503 CPG-534		3.2.1.8.2.0-4 3.2.1.10.0-3	

()
()
(Ξ)
١.	·	,
(5)
-	-	_

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
			CPG-2650		3.2.1.8.1.0-4	
			CPG-2652		3.2.1.8.1.0-1	
A- 1227	3.2.1.3.6.1.0-7	b(1)		CPGX- 5601		0-1.0- 2.0-3.0-1
A- 6918	3.2.1.3.6.1.0-8	b(1)		CPGX- 5601		0-1.0- 2.0-3.0-1
A- 1261	3.2.1.3.6.1.0-9	b(1)		CPGX- 5601		0-1.0- 2.0-3.0-1
A- 1228	3.2.1.3.6.1.0-10	b(1)		CPGX- 5601		0-1.0- 2.0-3.0-1
A- 6920	3.2.1.3.6.1.0-11	b(1)		CPGX- 5601		0-1.0- 2.0-3.0-1
A- 1262	3.2.1.3.6.1.0-12	b(1)		CPGX- 5601		0-1.0- 2.0-3.0-1
A-	3.2.1.3.6.1.0-13	b(3)	CPG-473		3.2.1.7.0-3	
1224			CPG-2614		3.2.1.7.0-8	
			CPG-2615		3.2.1.7.0-7	
A-	3.2.1.3.6.1.0-14	b(3)	CPG-473		3.2.1.7.0-3	
2227			CPG-2614		3.2.1.7.0-8	
			CPG-2615		3.2.1.7.0-7	
A- 1225	3.2.1.3.6.1.0-15	b(3)	CPG-536		3.2.1.10.0-5	
A- 2225	3.2.1.3.6.1.0-16	b(3)	CPG-536		3.2.1.10.0-5	
A-	3.2.1.3.6.1.0-17	b(3)	CPG-534		3.2.1.10.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
1259		b(3)				
A- 1226	3.2.1.3.6.1.0-18	b(3)	CPG-649		3.2.1.13.2.0- 5	
A- 1229	3.2.1.3.6.1.0-19	b(3)	CPG-649		3.2.1.13.2.0- 5	
A- 1260	3.2.1.3.6.1.0-20	b(3)	CPG-534		3.2.1.10.0-3	
A- 1759	3.2.1.3.6.1.0-21	b(1)	CPG-590 CPG-649 CPG-653		3.2.1.13.1.0- 1 3.2.1.13.2.0- 5 3.2.1.13.3.0- 3	
A- 1788	3.2.1.3.6.1.0-22	(U) The Fire Control System shall be an interactive participant for air tracks on the Integrated Broadcast System (IBS).	CPG-533 CPG-828 CPG-2652		3.2.1.10.0-2 3.2.2.2.0-15 3.2.1.8.1.0-1	
A- 1790	3.2.1.3.6.1.0-23	b(3)	CPG-535		3.2.1.10.0-4	
A- 1768	3.2.1.3.6.2.0-1	b(3)	CPG-532 CPG-536		3.2.1.10.0-1 3.2.1.10.0-5	
A- 1769	3.2.1.3.6.2.0-2	b(3)	CPG-532 CPG-536		3.2.1.10.0-1 3.2.1.10.0-5	
A- 1772	3.2.1.3.6.2.0-3	b(3)	CPG-539		3.2.1.10.0-10	
A-	3.2.1.3.6.2.0-4	b(3)	CPG-539		3.2.1.10.0-10	

		SECRET/NOFORN		- 4		
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
1773		b(3)				
A- 7030	3.2.1.3.6.2.0-5	b(3)	CPG-539		3.2.1.10.0-10	
A- 1770	3.2.1.3.6.3.0-1	b(3)	CPG-532		3.2.1.10.0-1	
1770			CPG-536		3.2.1.10.0-5	
A-	3.2.1.3.6.3.0-2	b(3)	CPG-532		3.2.1.10.0-1	
1771			CPG-536		3.2.1.10.0-5	
A- 2288	3.2.1.3.6.3.0-3	b(3)	CPG-539		3.2.1.10.0-10	
A- 2289	3.2.1.3.6.3.0-4	b(3)	CPG-539		3.2.1.10.0-10	
A- 7031	3.2.1.3.6.3.0-5	b(3)	CPG-539		3.2.1.10.0-10	
A-251	3.2.1.3.6.4.0-1	b(1)	CPG-533		3.2.1.10.0-2	
			CPG-536		3.2.1.10.0-5	
			CPG-825		3.2.2.2.0-12	
A-	3.2.1.3.6.4.0-2	b(3)	CPG-532		3.2.1.10.0-1	
1733			CPG-536		3.2.1.10.0-5	
A- 1734	3.2.1.3.6.4.0-3	b(3)	CPG-536		3.2.1.10.0-5	
A-	3.2.1.3.6.4.0-4	b(3)	CPG-532		3.2.1.10.0-1	
1789			CPG-533		3.2.1.10.0-2	
A-	3.2.1.3.6.4.0-5	b(3)	CPG-532		3.2.1.10.0-1	
1792			CPG-535		3.2.1.10.0-4	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 1766	3.2.1.3.6.5.0-1	b(3)	CPG-2490		3.2.1.14.0-13	
A- 1767	3.2.1.3.6.5.0-2	b(3)	CPG-2491		3.2.1.14.0-14	
A- 1785	3.2.1.3.6.5.0-3	b(3)	CPG-2492		3.2.1.14.0-15	
A- 2295	3.2.1.3.6.5.0-4	b(3)	CPG-698		3.2.1.14.0-12	
A-	3.2.2.1.0-1 (U) The Surveillance System shall have external interfaces in accordance with the JLENS System External IRS.	(U) The Surveillance System shall have external interfaces in accordance	CPG-372		3.2.1.4.1.0-1	
111715		with the JLENS System External IRS.	CPG-820		3.2.2.2.0-7	
			CPG-822		3.2.2.2.0-9	
			CPG-825		3.2.2.2.0-12	
			CPG-827		3.2.2.2.0-14	
		CPG-828		3.2.2.2.0-15		
			CPG-833		3.2.2.2.0-20	
A-	3.2.2.1.0-2	(U) The Fire Control System shall have external interfaces in accordance	CPG-372		3.2.1.4.1.0-1	
111714		with the JLENS System External IRS.	CPG-820		3.2.2.2.0-7	
			CPG-822		3.2.2.2.0-9	
			CPG-825		3.2.2.2.0-12	
			CPG-827		3.2.2.2.0-14	
			CPG-828		3.2.2.2.0-15	
			CPG-833		3.2.2.2.0-20	
A-	3.2.2.2.0-1	(U) The Surveillance System shall have internal interfaces in accordance	CPG-817		3.2.2.2.0-1	
111712		with the JLENS System Internal IRS.	CPG-818		3.2.2.2.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
			CPG-859		3.2.3.2.0-1	
			CPG-860		3.2.3.2.0-2	
			CPG-861		3.2.3.2.0-3	
			CPG-2582		3.2.2.2.0-2	
			CPG-2583		3.2.2.2.0-4	
A-	3.2.2.2.0-2	(U) The Fire Control System shall have internal interfaces in accordance	CPG-817		3.2.2.2.0-1	
111709		with the JLENS System Internal IRS.	CPG-819		3.2.2.2.0-5	
			CPG-859		3.2.3.2.0-1	
			CPG-860		3.2.3.2.0-2	
			CPG-861		3.2.3.2.0-3	
			CPG-2582		3.2.2.2.0-2	
			CPG-2584		3,2.2.2.0-6	
A- 1657	3.2.3.1.0-1	(U) All exterior metal surfaces of ground based equipment and the exterior surfaces of airborne enclosures external to the windscreen and aerostat excluding the SEMS and non-GFE Communications Payload airborne enclosures and support equipment shall be painted with Chemical Agent Resistant Coating (CARC), in accordance with H372287, with exterior topcoat 383 Green (color 34094 of Fed-Std-595).	CPG-1006		3.2.5.2.9.2.0-2	
A- 112573	3.2.3.1.0-2	(U) All exterior surfaces of non-GFE Communications Payload airborne enclosures external to both the windscreen and the aerostat; the surfaces of the Hull Measurement System which are exterior to the aerostat; and all Platform airborne frames and racks shall be painted with Chemical Agent Resistant Coating (CARC), in accordance with H372287, with exterior topcoat white (color 37875 of Fed-Std-595).	CPG-2588		3.2.5.2.9.2.0-3	
A- 1661	3.2.3.2.0-1	(U) JLENS enclosures which are mounted on the aerostat, exterior to the windscreen, and have the purpose to protect the equipment interior from NBC shall protect internal equipment from contamination, see 6.2, caused	CPG-1005		3.2.5.2.9.2.0-	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		by an NBC event as described in 3.2.5.2.9.1 Nuclear, Biological, and Chemical, Definitions.				
A-599	3.2.3.3.0-1	(U) Except for items approved by the government JLENS Product Manager, the aerostat flexible structure, the Mobile Mooring Station (MMS) and some Platform associated Ground Support Equipment (GSE), see 6.2, all JLENS equipment shall be packed for shipment using 8 or 8.5 ft height, 8 ft width and 20 ft length ISO containers.	CPG-1016		3.2.6.0-1	
A- 1611	3.2.3.4.0-1	(U) All JLENS manned operational shelters shall use Army Standard 8 or 8.5 ft height, 8 ft width and 20 ft length ISO containers.	CPG-868		3.2.3.3.0-1	
A-346	continually monitor th	(U) While in an operational mode, the Surveillance System shall	CPG-405		3.2.1.5.1.0-4	
		continually monitor the system's operational status. Operational status for the system is collected in the Communication and Processing Group Prime	CPG-548		3.2.1.11.0-5	
			CPG-656		3.2.1.14.0-1	
			CPG-657		3.2.1.14.0-2	
			CPG-658		3.2.1.14.0-3	
			CPG-678		3.2.1.14.0-7	
			CPG-685		3.2.1.14.0-8	
			CPG-691		3.2.1.14.0-9	
			CPG-696		3.2.1.14.0-10	
			CPG-697		3.2.1.14.0-11	
			CPG-2476		3.2.1.11.0-4	
A-347	3.2.4.2.1.0-2	(U) While in an operational mode, the Fire Control System shall continually	CPG-405		3.2.1.5.1.0-4	
		monitor the system's operational status. Operational status for the system is collected in the Communication and Processing Group Prime Item.	CPG-548		3.2.1.11.0-5	
	-	consected in the Communication and Processing Group Films item.	CPG-656		3.2.1.14.0-1	
			CPG-657		3.2.1.14.0-2	
			CPG-658		3.2.1.14.0-3	

\subset	כ
Č	Ć
Č	Ć
$\tilde{\alpha}$	5
ŏ	5
=	j

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App E Section
			CPG-678		3.2.1.14.0-7	
			CPG-685		3.2.1.14.0-8	
			CPG-691		3.2.1.14.0-9	
			CPG-696		3.2.1.14.0-10	
			CPG-697		3.2.1.14.0-11	
			CPG-2476		3.2.1.11.0-4	
A-349	3.2.4.2.2.0-1	(U) The Surveillance System shall store the detected faults either in non-	CPG-1190		3.3.7.1.0-1	
		volatile memory or on removable data storage media.	CPG-1191		3.3.7.1.0-2	
			CPG-2612		3.2.1.15.0-15	
A-350	3.2.4.2.2.0-2	(U) The Fire Control System shall store the detected faults either in non-volatile memory or on removable data storage media.	CPG-2612		3.2.1.15.0-15	
A-352	3.2.4.2.3.0-1		CPG-292		3.2.1.2.0-3	
		b(3)	CPG-911		3.2.4.2.0-3	
		2(3)	CPG-917		3.2.4.3.0-2	
			CPG-918		3.2.4.3.0-3	
			CPG-919		3.2.4.3.0-4	
			CPG-920		3.2.4.3.0-5	
			CPG-921		3.2.4.3.0-6	
Α-	3.2.4.2.3.0-2		CPG-742		3.2.1.16.1.0-	
1839		b(3)	CPG-901		12	
			CPG-905		3.2.4.2.0-1	
	k.		CPG-912		3.2.4.2.0-2	
			CPG-913		3.2.4.2.0-4	

Dec. 4, 2009 - JLENS A-Specification (S/NF)

CPG PIDS

App B

CPG PIDS

App B

ш	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/AP)	Object ID	Object ID	Section	Section Section
			CPG-924		3.2.4.2.0-5	
			CPG-925		3.2.4.3.0-9	
			CPG-930		3.2.4.3.0-10	
					3.2.4.4.0-4	
A-353	3.2.4.2.3.0-3		CPG-292		3.2.1.2.0-3	
		b(3)	CPG-911		3.2.4.2.0-3	
		5/5/	CPG-917		3.2.4.3.0-2	
			CPG-918		3.2.4.3.0-3	
			CPG-919		3.2.4.3.0-4	
			CPG-920		3.2.4.3.0-5	
			CPG-921		3.2.4.3.0-6	
A-	3.2.4.2.3.0-4		CPG-901		3.2.4.2.0-1	
1840		b(3)	CPG-905		3.2.4.2.0-2	
		5(3)	CPG-912		3.2.4.2.0-4	
			CPG-913		3.2.4.2.0-5	
		*	CPG-924		3.2.4.3.0-9	
			CPG-925		3.2.4.3.0-10	
			CPG-930		3.2.4.4.0-4	
A-355	3.2.4.2.4.0-1		CPG-916		3.2.4.3.0-1	
		b(3)				
A-356	3.2.4.2.4.0-2	b(3)	CPG-916		3.2.4.3.0-1	

000968

ID

Object Number

Dec. 4, 2009 - JLENS A-Specification (S/NF)

CPG PIDS

Section

App B

Section

App B Object

ID

CPG PIDS

Object ID

		b(3)		
A-358	3.2.4.2.5.0-1	b(3)	CPG-929	3.2.4.4.0-3
A- 6389	3.2.4.2.5.0-2	b(3)	CPG-928	3.2.4.4.0-2
A-359	3.2.4.2.5.0-3	b(3)	CPG-929	3.2.4.4.0-3
A- 6390	3.2.4.2.5.0-4	b(3)	CPG-928	3.2.4.4.0-2
A-361	3.2.4.2.6.0-1	b(3)	CPG-928 CPG-929	3.2.4.4.0-2 3.2.4.4.0-3
A-367	3.2.4.2.7.0-1	b(3)	CPG-923	3.2.4.3.0-8
A-368	3.2.4.2.7.0-2	b(3)	CPG-923	3.2.4.3.0-8
A-370	3.2.4.2.8.0-1	b(3)	CPG-916 CPG-922	3.2.4.3.0-1 3.2.4.3.0-7
A-371	3.2.4.2.8.0-2	b(3)	CPG-916 CPG-922	3.2.4.3.0-1 3.2.4.3.0-7
A-374	3.2.4.2.9.1.0-1	(U) The Surveillance System shall incorporate a health management system to provide diagnostics and prognostics capability to evaluate the condition of, and predict, where possible, impending failure conditions that result in an inability of the system to perform its mission.	CPG-657 CPG-658 CPG-665 CPG-914 CPG-932	3.2.1.14.0-2 3.2.1.14.0-3 3.2.1.14.0-4 3.2.4.2.0-6

ID

Object Number

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
			CPG-933		3.2.4.5.0-2	
			CPG-934		3.2.4.5.0-3	
A-375	3.2.4.2.9.1.0-2	(U) The Fire Control System shall incorporate a health management system to provide diagnostics and prognostics capability to evaluate the condition of, and predict, where possible, impending failure conditions that result in	CPG-657		3.2.1.14.0-2	
			CPG-658		3.2.1.14.0-3	
		an inability of the system to perform its mission.	CPG-665		3.2.1.14.0-4	
			CPG-914		3.2.4.2.0-6	
			CPG-932		3.2.4.5.0-1	
			CPG-933		3.2.4.5.0-2	
			CPG-934		3.2.4.5.0-3	
A-377	3.2.4.2.9.2.0-1	(U) The Surveillance System shall include a prognostic capability which can predict impending faults and failures of components such that 30% of impending critical faults or failures are identified (with 70% accuracy [O]) within no less than 20 hours before mission failure.	CPG-933		3.2.4.5.0-2	
A-378	3.2.4.2.9.2.0-2	(U) The Fire Control System shall include a prognostic capability which can predict impending faults and failures of components such that 30% of impending critical faults or failures are identified (with 70% accuracy [O]) within no less than 20 hours before mission failure.	CPG-933		3.2.4.5.0-2	
A-398	3.2.4.4.1.0-1	(U) The Surveillance System shall perform system configuration checks	CPG-658		3.2.1.14.0-3	
		during system initialization.	CPG-1177		3.3.5.7.0-1	
			CPG-2452		3.3.5.7.0-3	
			CPG-2578		3.3.5.7.0-2	
A-399	3.2.4.4.1.0-2	(U) The Fire Control System shall perform system configuration checks	CPG-658		3.2.1.14.0-3	
		during system initialization.	CPG-1177		3.3.5.7.0-1	
			CPG-2452		3.3.5.7.0-3	

ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
			CPG-2578		3.3.5.7.0-2	
A-401	3.2.4.4.2.0-1	(U) The Surveillance System Prime Items shall pass all configuration checks prior to transitioning to an operational mode.	CPG-1178		3.3.5.7.0- 5.0-1	
A-402	3.2.4.4.2.0-2	(U) The Fire Control System Prime Items shall pass all configuration checks prior to transitioning to an operational mode.	CPG-1178		3.3.5.7.0- 5.0-1	
A-404	3.2.4.4.3.0-1	(U) The Surveillance System Prime Items shall have manual override of the automatic configuration checks.	CPG-1180		3.3.5.7.0-5	
A-405	3.2.4.4.3.0-2	(U) The Fire Control System Prime Items shall have manual override of the automatic configuration checks.	CPG-1180		3.3.5.7.0-5	
A-407	3.2.4.4.4.0-1	(U) The Surveillance System configuration status shall be displayed to the Communications and Control Shelter operators.	CPG-658 CPG-1179		3.2.1.14.0-3 3.3.5.7.0-4	
A-408	3.2.4.4.4.0-2	(U) The Fire Control System configuration status shall be displayed to the Communications and Control Shelter operators.	CPG-658 CPG-1179		3.2.1.14.0-3 3.3.5.7.0-4	
A-410	3.2.4.4.5.0-1	(U) The Surveillance System shall include a configuration log which includes the results of the configuration checks.	CPG-1181		3.3.5.7.0-6	
A-411	3.2.4.4.5.0-2	(U) The Fire Control System shall include a configuration log which includes the results of the configuration checks.	CPG-1181		3.3.5.7.0-6	
A-423	3.2.5,1.3.1.0-1	(U) The Surveillance System in an appropriate operational mode shall meet the performance specified in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors during exposure to an ambient temperature range from -40°C to +49°C (Mean Sea Level). Temperature as a function of altitude is provided in Appendix F.	CPG-939		3.2.5.1.1.0-1	
A-424	3.2.5.1.3.1.0-2	(U) The Fire Control System in an appropriate operational mode shall meet the performance specified in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> during exposure to an ambient temperature range from -40°C to +49°C (Mean Sea Level). Temperature as a function of altitude is provided in Appendix F.	CPG-939		3.2.5.1.1.0-1	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A-426	3.2.5.1.3.2.0-1	(U) The Surveillance System in the appropriate operational mode shall meet the performance specified in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors after exposure to an ambient temperature range from -46°C to +71°C while in the storage and movement configurations, with the allowance of environmental kits and procedures for temperature extremes.	CPG-940		3.2.5.1.1.0-2	
A-427	3.2.5.1.3.2.0-2	(U) The Fire Control System in the appropriate operational mode shall meet the performance specified in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors after exposure to an ambient temperature range from -46°C to +71°C while in the storage and movement configurations, with the allowance of environmental kits and procedures for temperature extremes.	CPG-940		3.2.5.1.1.0-2	
A-429	3.2.5.1.4.1.0-1	(U) The Surveillance System, in an appropriate operational mode, shall meet all performance requirements in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> and 3.2.4 <i>System Quality Factors</i> during exposure to a relative humidity range from 3 to 100% non-condensing.	CPG-942		3.2,5.1.2.0-1	
A-431	3.2.5.1.4.1.0-2	(U) The Fire Control System, in an appropriate operational mode, shall meet all performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors during exposure to a relative humidity range from 3 to 100% non-condensing.	CPG-942		3.2.5.1.2.0-1	
A- 7058	3.2.5.1.4.2.0-1	(U) The Surveillance System, in an appropriate operational mode, shall meet all performance requirements in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors after exposure, while in the deployment, storage and movement configurations, to a relative humidity range from 3 to 100% non-condensing.	CPG-943		3.2.5.1.2.0-2	
A- 7059	3.2.5.1.4.2.0-2	(U) The Fire Control System, in an appropriate operational mode, shall meet all performance requirements in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> after exposure, while in the deployment, storage and movement configurations, to a relative humidity range from 3 to 100% non-condensing.	CPG-943		3.2.5.1.2.0-2	
A-436	3,2.5.1.5.1.1.0-1	b(3)	CPG-945		3.2.5.1.3.0-1	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		b(3)				
A-437	3.2.5.1.5.1.1.0-2	b(3)	CPG-945		3.2.5.1.3.0-1	
A-440	3.2.5.1.5.1.2.0-1	b(3)	CPG-946		3.2.5.1.3,0-2	
A-441	3.2.5.1.5.1.2.0-2	b(3)	CPG-946		3.2.5.1.3.0-2	
A-444	3.2.5.1.5.2.1.0-1	b(3)	CPG-945		3.2.5.1.3.0-1	
A-445	3.2.5.1.5.2.1.0-2	b(3)	CPG-945		3.2.5.1.3.0-1	
A-447	3.2.5.1.5.2.2.0-1	b(3)	CPG-946		3.2.5.1.3.0-2	

C)
\subseteq)
$\frac{2}{3}$	•
9	i
4	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A-448	3.2.5.1.5.2.2.0-2	b(3)	CPG-946		3.2.5.1.3.0-2	
A-451	3.2.5.1.6.1.0-1	(U) The Surveillance System shall survive during exposure to hail up to one-half inch in diameter while in the appropriate operational mode.	CPG-948		3.2.5.1.4.0-1	
A-452	3.2.5.1.6.1.0-2	(U) The Fire Control System shall survive during exposure to hail up to one-half inch in diameter while in the appropriate operational mode.	CPG-948		3.2.5.1.4.0-1	
A-454	3.2.5.1.6.2.0-1	(U) While in the storage and movement configurations, the Surveillance System shall be protected during exposure to hail up to one-half inch in diameter.	CPG-949		3.2.5.1.4.0-2	
A-455	3.2.5.1.6.2.0-2	(U) While in the storage and movement configurations, the Fire Control System shall be protected during exposure to hail up to one-half inch in diameter.	CPG-949		3.2.5.1.4.0-2	
A-458	3.2.5.1.7.1.0-1	(U) The Surveillance System, in the appropriate operational mode, shall meet all performance requirements in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors except sensor performance, which can degrade, during exposure up to 10.2 cm (4 inches) of snow accumulation on ground equipment surfaces where the snow has a density of 0.3 gram per cubic centimeter.	CPG-952		3.2.5.1.5.0-2	
A- 7044	3.2.5.1.7.1.0-2	(U) The Surveillance System, in the appropriate operational mode, shall meet all performance requirements in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> and 3.2.4 <i>System Quality Factors</i> except sensor performance, which can degrade, during a snow falling rate of up to 2.54 cm/hour (1 inch/hour). Note: The falling snow does not accumulate on the aerostat.	CPG-951		3.2.5.1.5.0-1	
A-459	3.2.5.1.7.1.0-3	(U) The Fire Control System, in the appropriate operational mode, shall meet all performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors except sensor performance, which can degrade, during exposure up to 10.2 cm (4 inches) of snow accumulation on ground equipment surfaces where the snow has a density of 0.3 gram per cubic centimeter.	CPG-952		3.2.5.1.5.0-2	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 7045	3.2.5.1.7.1.0-4	(U) The Fire Control System, in the appropriate operational mode, shall meet all performance requirements in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> except sensor performance, which can degrade, during a snow falling rate of up to 2.54 cm/hour (1 inch/hour). Note: The falling snow does not accumulate on the aerostat.	CPG-951		3.2.5,1,5.0-1	
A-461	3.2.5.1.7.2.0-1	(U) While in the storage and movement configurations, the Surveillance System shall be protected during exposure to snow accumulation, with a density of 0.3 gram per cubic centimeter, of up to 15.2 cm (6 inches) in 12 hours.	CPG-953		3.2.5.1.5.0-3	
A-462	3.2.5.1.7.2.0-2	(U) While in the storage and movement configurations, the Fire Control System shall be protected during exposure to snow accumulation, with a density of 0.3 gram per cubic centimeter, of up to 15.2 cm (6 inches) in 12 hours.	CPG-953		3.2.5.1.5.0-3	
A-464	3.2.5.1.8.1.0-1	(U) The Surveillance System, in the appropriate operational mode, shall meet performance specification in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> and 3.2.4 <i>System Quality Factors</i> when exposed to a salt atmosphere in sea locations and coastal regions. For information on salt atmospheres please see Appendix B.	CPG-955		3.2.5.1.6.0-1	
A-467	3.2.5.1.8.1.0-2	(U) The Fire Control System, in the appropriate operational mode, shall meet performance specifications in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> when exposed to a salt atmosphere in sea locations and coastal regions.	CPG-955		3.2.5.1.6.0-1	
A-465	3.2.5.1.8.2.0-1	(U) The Surveillance System, in the appropriate operational mode, shall meet performance specifications in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> and 3.2.4 <i>System Quality Factors</i> after exposure to a salt atmosphere in sea locations and coastal regions while in a non-operational mode.	CPG-956		3.2.5.1.6.0-2	
A-468	3.2.5.1.8.2.0-2	(U) The Fire Control System, in the appropriate operational mode, shall meet performance specifications in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> after exposure to a	CPG-956		3.2.5.1.6.0-2	

		SECRET/NOFORN			4	
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
П		salt atmosphere in sea locations and coastal regions while in a non- operational mode,				
A-466	3.2.5.1.8.3.0-1	(U) The Surveillance System, in the appropriate operational mode, shall meet performance specifications in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> and 3.2.4 <i>System Quality Factors</i> after exposure to a salt atmosphere during ocean transportation while in the transport configuration.	CPG-957		3.2.5.1.6.0-3	
A-469	3.2,5,1,8,3,0-2	(U) The Fire Control System, in the appropriate operational mode, shall meet performance specifications in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> after exposed to a salt atmosphere during ocean transportation while in the transport configuration.	CPG-957		3.2.5.1.6.0-3	
A-472	3.2.5.1.9.1.0-1	(U) The Surveillance System, in the appropriate operational mode, shall meet performance in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> (degraded sensor performance during operation is permitted) and 3.2.4 <i>System Quality Factors</i> when exposed to blowing dust of up to 149 μ m diameter in concentrations of up to 10 ± 7 g/m³ $(0.3 \pm 0.2$ g/ft³) for velocities up to 8.9 m/s (17.3 knots) (32.04 km/hr).	CPG-959		3.2.5.1.7.0-1	
A- 7038	3.2.5.1.9.1.0-2	(U) The Surveillance System, in the appropriate operational mode, shall meet performance in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> (degraded sensor performance during operation is permitted) and 3.2.4 <i>System Quality Factors</i> when surface equipment is exposed to blowing sand for diameters in the range of 150 to 850 μ m diameter in concentrations of up to 1.1 \pm 0.3 g/m ³ (0.033 \pm 0.0075 g/ft ³) for velocities up to 29.0 m/s (56.4 knots) (104.5 km/hr).	CPG-960		3.2.5.1.7.0-2	
A- 7039	3.2,5.1.9.1.0-3	(U) The Surveillance System, in the appropriate operational mode, shall meet performance in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> (degraded sensor performance during operation is permitted) and 3.2.4 <i>System Quality Factors</i> when airborne equipment is exposed to blowing sand for diameters in the range of 150 to 850 μm diameter in concentrations of up to 0.18 -0.0/+0.2 g/m³ (0.005 -0.0/+0.0057 g/ft³) for velocities up to 29.0 m/s (56.4 knots) (104.5 km/hr). Note: for the Tactical	CPG-961		3.2.5.1.7.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		Mode, blowing sand does not reach operational altitude.				
A-473	3,2.5,1,9.1,0-4	(U) The Fire Control System, in the appropriate operational mode, shall meet performance in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> (degraded sensor performance during operation is permitted) and 3.2.4 <i>System Quality Factors</i> when exposed to blowing dust of up to 149 μ m diameter in concentrations of up to 10 ± 7 g/m³ (0.3 \pm 0.2 g/ft³) for velocities up to 8.9 m/s (17.3 knots) (32.04 km/hr).	CPG-959		3.2.5.1.7.0-1	
A- 7040	3.2.5,1.9.1.0-5	(U) The Fire Control System, in the appropriate operational mode, shall meet performance in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> (degraded sensor performance during operation is permitted) and 3.2.4 <i>System Quality Factors</i> when surface equipment is exposed to blowing sand for diameters in the range of 150 to 850 μ m diameter in concentrations of up to 1.1 ± 0.3 g/m ³ (0.033 ± 0.0075 g/ft ³) for velocities up to 29.0 m/s (56.4 knots) (104.5 km/hr).	CPG-960		3.2.5.1.7.0-2	
A- 7041	3.2.5.1.9.1.0-6	(U) The Fire Control System, in the appropriate operational mode, shall meet performance in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> (degraded sensor performance during operation is permitted) and 3.2.4 <i>System Quality Factors</i> when airborne equipment is exposed to blowing sand for diameters in the range of 150 to 850 μm diameter in concentrations of up to 0.18 -0.0/+0.2 g/m³ (0.005 -0.0/+0.0057 g/ft³) for velocities up to 29.0 m/s (56.4 knots) (104.5 km/hr). Note: for the Tactical Mode, blowing sand does not reach operational altitude.	CPG-961		3.2.5.1.7.0-3	
A-475	3.2.5.1.9.2.0-1	(U) The Surveillance System, after assembly into the appropriate operational mode, shall meet performance in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors following exposure, while in the storage and movement configurations, to blowing dust of up to 149 μ m diameter in concentrations of up to 10 ± 7 g/m³ $(0.3 \pm 0.2 \text{ g/ft}^3)$ for velocities up to 8.9 m/s (17.3 knots) (32.04 km/hr) .	CPG-962		3.2.5.1.7.0-4	
A- 7042	3.2.5.1.9.2.0-2	(U) The Surveillance System, after assembly into the appropriate operational mode, shall meet performance in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors following exposure, while in the storage and movement configurations, to	CPG-963		3.2.5.1.7.0-5	

\subset)
\subset)
\subset)
Œ	
_	1
α	Ó

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		blowing sand for diameters in the range of 150 to 850 μ m diameter in concentrations of up to 2.2 ± 0.5 g/m³ $(0.06 \pm 0.015$ g/ft³) for velocities up to 29.0 m/s (56.4 knots) (104.5 km/hr).				
A-476	3.2.5.1.9.2.0-3	(U) The Fire Control System, after assembly into the appropriate operational mode, shall meet performance in 3.2.1.3 <i>Performance Characteristics, Surveillance System</i> and 3.2.4 <i>System Quality Factors</i> following exposure, while in the storage and movement configurations, to blowing dust of up to 149 μ m diameter in concentrations of up to 10 ± 7 g/m³ $(0.3 \pm 0.2 \text{ g/ft}^3)$ for velocities up to 8.9 m/s (17.3 knots) (32.04 km/hr) .	CPG-962		3.2.5.1.7.0-4	
A- 7043	3.2.5.1.9.2.0-4	(U) The Fire Control System, after assembly into the appropriate operational mode, shall meet performance in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> following exposure, while in the storage and movement configurations, to blowing sand for diameters in the range of 150 to 850 μ m diameter in concentrations of up to 2.2 ± 0.5 g/m³ $(0.06 \pm 0.015$ g/ft³) for velocities up to 29.0 m/s (56.4 knots) (104.5 km/hr).	CPG-963		3.2.5.1.7.0-5	
A-478	3.2.5.1.10.0-1	(U) The Surveillance system shall be either composed of materials that inhibit the fungus growth or composed of materials which are protected from environments that would encourage fungus growth.	CPG-965		3.2.5.1.8.0-1	
A-479	3.2.5.1.10.0-2	(U) The Fire Control System shall be either composed of materials that inhibit the fungus growth or composed of materials which are protected from environments that would encourage fungus growth.	CPG-965		3.2.5.1.8.0-1	
A-482	3.2.5.1.11.1.0-1	(U) The Surveillance System, in the appropriate operational mode, shall meet performance requirements in 3.2.1.2 <i>Performance Characteristics, Surveillance System</i> and 3.2.4 <i>System Quality Factors</i> while being subjected to steady state winds up to 73 km/hr (40 knots) with turbulence of 1.98 m/s (6.5 fps) rms.	CPG-967		3.2.5.1.9.0-1	
A-483	3.2.5.1.11.1.0-2	(U) The Fire Control System, in the appropriate operational mode, shall meet performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors while being subjected to steady state winds up to 73 km/hr (40 knots) with turbulence of	CPG-967		3.2.5.1.9.0-1	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		1.98 m/s (6.5 fps) rms.				
A-486	3.2.5,1,11,2,1.0-1	(U) The Surveillance System while moored or at altitude, while either operational or non-operational, shall survive, see 6.2, an exposure to steady state winds of up 148 km/hr (80 knots) with turbulence of 3.05 m/s (10 fps) rms.	CPG-968		3.2.5.1.9.0-2	
A-487	3.2.5.1.11.2.1.0-2	(U) The Fire Control System while moored or at altitude, while either operational or non-operational, shall survive, see 6.2, an exposure to steady state winds of up 148 km/hr (80 knots) with turbulence of 3.05 m/s (10 fps) rms.	CPG-968		3.2.5.1.9.0-2	
A-489	3.2.5.1.11.2.2.0-1	(U) The Surveillance System, in the storage, movement and operations configurations, shall survive an exposure to steady state winds of up to 185 km/hr (100 knots).	CPG-968		3.2.5.1,9.0-2	
A-490	3.2.5.1.11.2.2.0-2	(U) The Fire Control System, in the storage, movement, and operations configurations, shall survive an exposure to steady state winds of up to 185 km/hr (100 knots).	CPG-968		3.2.5.1.9.0-2	
A-495	3.2.5.1.12.1.0-1	(U) The Surveillance System ground equipment, in the operations configuration, movement configuration, or storage configuration, shall be protected from direct and indirect lightning, including LEMP, in accordance with the lightning requirements of MIL-STD-464. Relevant sections of MIL-HDBK-419A and NFPA-780 can be used for guidance.	CPG-972		3.2.5.1.10.0-1	
A-496	3.2.5.1.12.1.0-2	(U) The Fire Control System ground equipment, in the operations configuration, movement configuration, or storage configuration, shall be protected from direct and indirect lightning, including LEMP, in accordance with the lightning requirements of MIL-STD-464. Relevant sections of MIL-HDBK-419A and NFPA-780 can be used for guidance.	CPG-972		3.2.5.1.10.0-1	
A-498	3.2.5.1.12.2.0-1	(U) The Surveillance System airborne equipment, when in the operations configuration, shall survive direct or indirect lightning strikes to the aerostat lightning cage, which produce a maximum induced current of 145 kA including LEMP. Relevant sections of MIL-HDBK-419A and NFPA-780 can be used for guidance.	CPG-2482		3.2.5.1.10.0-2	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A-499	3.2.5.1.12.2.0-2	(U) The Fire Control System airborne equipment, when in the operations configuration, shall survive direct or indirect lightning strikes to the aerostat lightning cage, which produces a maximum induced current of 145 kA including LEMP. Relevant sections of MIL-HDBK-419A and NFPA-780 can be used for guidance.	CPG-2482		3.2.5.1.10.0-2	
A-501	3.2.5.1.12.3.0-1	(U) The Surveillance System shall return to the state, mode and stored configuration existing prior to a near lightning strike, see 6.2, after a controlled restart, not requiring repair. By definition, a nearby lightning strike does not cause equipment damage. A controlled restart is according to procedures.	CPG-973		3.2.5.1.10.0-3	
A-502	3.2.5,1.12.3.0-2	(U) The Fire Control System shall return to the state, mode and stored configuration existing prior to a near lightning strike, see 6.2, after a controlled restart, not requiring repair. By definition, a nearby lightning strike does not cause equipment damage. A controlled restart is according to procedures.	CPG-973		3.2.5.1.10.0-	
A-509	3.2.5.2.1.1.0-1	(U) The Surveillance System, while in the appropriate operational mode, shall meet performance requirements in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors while being subjected to vibration levels caused by operation.	CPG-976		3.2.5.2.1.0-1	
A-510	3.2.5.2.1.1.0-2	(U) The Fire Control System, while in the appropriate operational mode, shall meet performance requirements in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> and 3.2.4 <i>System Quality Factors</i> while being subjected to vibration levels caused by operation.	CPG-976		3.2.5.2.1.0-1	
A-512	3.2.5.2.1.2.0-1	(U) The Surveillance System, in the appropriate operational mode, shall meet all performance requirements in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors following exposure to vibration levels caused by normal transportation, maintenance, or storage. Transportation includes, air, ground (both road and rail), and sea.	CPG-977		3.2.5.2.1.0-2	
A-513	3.2.5.2.1.2.0-2	(U) The Fire Control System, in the appropriate operational mode, shall meet all performance requirements in 3.2.1.3 <i>Performance Characteristics</i> ,	CPG-977		3.2.5.2.1.0-2	

		S	ECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A	-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		Fire Control System and 3.2.4 System Q to vibration levels caused by normal tra storage. Transportation includes, air, grail), and sea.	insportation, maintenance, or				
A-516	3.2.5.2.2.1.0-1	(U) The Surveillance System, while in a performance requirements in 3.2.1.2 Pe Surveillance System, and 3.2.4 System operational mode, while being subjected normal operation of that mode.	erformance Characteristics, Quality Factors applicable to that	CPG-979		3.2.5.2.2.0-1	
A-517	3.2.5.2.2.1.0-2	(U) The Fire Control System, while in a performance requirements in 3.2.1.3 Pe Control System and 3.2.4 System Quality operational mode, while being subjected normal operation of that mode.	CPG-979		3.2.5.2.2.0-1		
A-521	3.2.5.2.2.2.0-1	(U) The JLENS LRUs shall meet performance Characteristics and 3.2.4 S LRUs are dropped, with the drop height weight as:	System Quality Factors after the	CPG-980		3.2.5.2.2.0-2	
		Package Gross Weight, kg	Design Drop Height, cm				
		0 to 9.1 (0 to 20)	76 (30)				
		9.2 to 18.2 (21 to 40)	66 (26)				
		18.3 to 27.2 (41 to 60)	61 (24)				
		27.4 to 36.3 (61 to 80)	46 (18)				
		36.4 to 45.4 (81 to 100)	38 (15)				
		45.5 to 68.1 (101 to 150)	31 (12)				
	-1	68.2 to 113.5 (151 to 250)	26 (10)				
		113.6 or greater (251 or greater)	20 (8)				
			UNCLASSIFIED				

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		while packaged in their transit containers according to the applicable technical documentation.				
A- 111711	3.2.5.2.3.1.0-1	(U) After assembly to an operational configuration and while in the appropriate operational mode, the JLENS Orbit components, which are packaged for the Movement State in ISO containers or ISO shelters, shall meet performance requirements in 3.2.1 Performance Characteristics and 3.2.4 System Quality Factors after exposure to a while the JLENS equipment is mounted in the designated ISO shelters or ISO containers for that equipment and while the JLENS equipment is in the transport configuration.	CPG-2551		3.2.5,2.3.0-3	
A- 113361	3.2.5.2.3.2.0-1	(U) After assembly to an operational configuration and while in the appropriate operational mode, the JLENS Orbit non-fragile components, see 6.2, except the MMS, shall meet performance requirements in 3.2.1 Performance Characteristics and 3.2.4 System Quality Factors after exposure to a b(3) while the JLENS equipment is mounted in the designated ISO shelters or ISO containers for that equipment and while the JLENS equipment is in the transport configuration.	CPG-2605		3.2.5.2.3.0-2	
A-523	3.2.5.2.3.3.0-1	(U) After assembly to an operational configuration and while in the appropriate operational mode, the JLENS Orbit fragile components, see 6.2, which are packaged for the Movement State in ISO containers or ISO shelters, shall meet performance requirements in 3.2.1 Performance Characteristics and 3.2.4 System Quality Factors after exposure to a while the JLENS equipment is mounted in the designated ISO shelters or ISO containers for that equipment and while the JLENS equipment is in the transport configuration.	CPG-982		3.2.5.2.3.0-1	
A- 113342	3.2.5.2.3.6.0-1	(U) Each JLENS unique transportation fixture onto which fragile hardware is mounted shall be marked with speical handling procedures using MIL-STD-129P as guidance.	CPG-2606		3.2.6.5.0-5	
A-526	3.2.5.2.4.1.0-1	(U) The electrically initiated devices (EID) or electro-explosive devices	CPG-984		3.2.5.2.4.0-1	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		(EED) used in the Surveillance System shall be rendered safe using explosive ordnance disposal (EOD) tools, methods, and technology.				
A-527	3.2.5.2.4.1.0-2	(U) The electrically initiated devices (EID) or electro-explosive devices (EED) used in the Fire Control System shall be rendered safe using explosive ordnance disposal (EOD) tools, methods, and technology.	CPG-984		3.2.5.2.4.0-1	
A-529	3.2.5.2.4.2.0-1	(U) The Surveillance System EIDs and EEDs shall be protected from inadvertent ignition during, or experience degraded performance characteristics after, exposure to externally radiated electromagnetic environments (EME) using MIL-STD-464A as guidance.	CPG-984		3.2.5.2.4.0-1	
A-530	3.2.5.2.4.2.0-2	(U) The Fire Control System EIDs and EEDs shall be protected from inadvertent ignition during, or experience degraded performance characteristics after, exposure to externally radiated electromagnetic environments (EME) using MIL-STD-464A as guidance.	CPG-984		3.2.5.2.4.0-1	
A-533	3.2.5.2.5.1.1.0-1	(U) The Surveillance System shall control unintentional emissions, see 6.2, using MIL-STD-461E, Figure RE102-4, Army curve as a guide.	CPG-987		3.2.5.2.5.0-1	
A- 10330	3.2.5.2.5.1.1.0-3	(U) The Surveillance System, in the appropriate operational mode, shall meet performance requirements in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors in the presence of intra-system radiated and conducted emissions.	CPG-2414		3.2.5.2.5.0-5	
A-535	3.2.5.2.5.1.1.0-4	(U) The Fire Control System shall control unintentional emissions, see 6.2, using MIL-STD-461E, RE102-4 Army curve as a guide.	CPG-987		3.2.5.2.5.0-1	
A- 10331	3.2.5.2.5.1.1.0-6	(U) The Fire Control System, in the appropriate operational mode, shall meet performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors in the presence of intra-system radiated and conducted emissions.	CPG-2414		3.2.5.2.5.0-5	
A- 7050	3.2.5.2.5.1.2.0-1	(U) The Surveillance System ground equipment, in the appropriate operational mode, shall meet performance requirements in 3.2.1.2 Performance Characteriscs, Surveillance System and 3.2.4 System Quality Factors in the presence electromagnetic interference using MIL-STD-461E,	CPG-988 CPG-990		3.2.5.2.5.0-2 3.2.5.2.5.0-4	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		RS103, as a guide. The "tuned frequency" referred into MIL-STD-461E, RS103, is defined as the in-band frequency in 6.2.				
A- 7049	3.2.5.2.5.1.2.0-2	(U) The Fire Control System ground equipment, in the appropriate operational mode, shall meet performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors in the presence of electromagnetic interference using MIL-STD-461E, RS103, as a guide. The "tuned frequency" referred into MIL-STD-461E, RS103, is defined as the in-band frequency in 6.2.	CPG-988 CPG-990		3.2.5.2.5.0-2 3.2.5.2.5.0-4	
A- 10328	3.2.5.2.5.1.2.1.0-1	(U) The Surveillance System airborne equipment, excluding the IFF subsystem and the GPS, in the appropriate operational mode, shall meet performance requirements in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors in the presence of spurious in-band electromagnetic interference using MIL-STD-461E, 6(3) GFE must be MIL-STD-461E compliant.	CPG-2415		3.2.5.2.5.0-6	
A- 10329	3.2.5.2.5.1.2.1.0-3	(U) The Fire Control System airborne equipment excluding the IFF subsystem and the GPS, in the appropriate operational mode, shall meet performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors in the presence of spurious in-band electromagnetic interference using MIL-STD-461E, GFE must be MIL-STD-461E compliant.	CPG-2415		3.2.5.2.5.0-6	1
A-534	3.2.5.2.5.1.2.2.0-1	(U) The Surveillance System airborne equipment excluding the IFF subsystem, in the appropriate operational mode, shall meet performance requirements in 3.2.1.2 Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors in the presence of spurious non-in-band (out of band) electromagnetic interference, from b(3) GFE must be compliant with MIL-STD-461E. See 6.2 for the definition of in-band frequencies for antenna-connected equipment.	CPG-2416		3.2.5.2.5.0-7	
A- 10332	3.2.5.2.5.1.2.2.0-3	(U) The Fire Control System airborne equipment excluding the FCR but including the GPS, in the appropriate operational mode, shall meet performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors in the presence of	CPG-2416		3.2.5.2.5.0-7	

	SECRET/NOFORN				
Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
	GFE must be compliant with MIL-STD-461E. See 6.2 for the definition of in-band frequencies for antenna-connected equipment.				
3.2.5.2.5.2.0-1	(U) Grounding and bonding on the Surveillance System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A.	CPG-989		3.2.5.2.5.0-3	
3.2.5.2.5.2.0-2	(U) Grounding and bonding on the Fire Control System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A.	CPG-989		3.2.5.2.5.0-3	
3.2.5.2.6.1.0-1		CPG-2405	CPGX- 2924	3.2.5.2.6.0-1	0-1.0- 2.0-7.0-
	b(1)				
	3.2.5.2.5.2.0-1	Object Number Dec. 4, 2009 - JLENS A-Specification (S/NF) Spurious non-in-band electromagnetic interference, from GFE must be compliant with MIL-STD-461E. See 6.2 for the definition of in-band frequencies for antenna-connected equipment. 3.2.5.2.5.2.0-1 (U) Grounding and bonding on the Surveillance System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A. 3.2.5.2.5.2.0-2 (U) Grounding and bonding on the Fire Control System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A.	Object Number Dec. 4, 2009 - JLENS A-Specification (S/NF) Spurious non-in-band electromagnetic interference, from GFE must be compliant with MIL-STD-461E. See 6.2 for the definition of in-band frequencies for antenna-connected equipment. 3.2.5.2.5.2.0-1 (U) Grounding and bonding on the Surveillance System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A. 3.2.5.2.5.2.0-2 (U) Grounding and bonding on the Fire Control System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A. CPG-989 CPG-989 CPG-989 CPG-989 CPG-989 CPG-989	Object Number Dec. 4, 2009 - JLENS A-Specification (S/NF) Spurious non-in-band electromagnetic interference, from GFE must be compliant with MIL-STD-461E. See 6.2 for the definition of in-band frequencies for antenna-connected equipment. (U) Grounding and bonding on the Surveillance System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A. (U) Grounding and bonding on the Fire Control System shall be implemented in accordance with the electrical bonding and external grounds requirements of MIL-STD-464A. CPG-989 CPG-989 CPG-989 CPG-989 CPG-989 CPG-989	Object Number Dec. 4, 2009 - JLENS A-Specification (S/NF) Sobject ID Object ID Objec

000985

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A-542	3.2.5.2.6.1.0-2		CPG-2405	CPGX- 2924	3.2.5.2.6.0-1	0-1.0- 2.0-7.0-
		b(1)				
A- 6891	3.2.5.2.6.2.0-1	b(1)	CPG-2405	CPGX- 2924 CPGX- 6008	3.2.5.2.6.0-1	0-1.0- 2.0-7.0- 0-1.0- 2.0-7.0-
A- 6892	3.2.5.2.6.2.0-2	b(1)	CPG-2405	CPGX- 2924 CPGX-	3.2.5.2.6.0-1	0-1.0- 2.0-7.0- 0-1.0-

Dec. 4, 2009 - JLENS A-Specification (S/NF)

(U) The Surveillance System LRUs or equipment cabinets as appropriate,

except for GFE, shall meet performance requirements in 3.2.1.2

CPG PIDS

Section

3.2.5.2.7.0-1

3.2.5.2.9.2.0-

App B

Section

CPG PIDS

Object ID

CPG-993

CPG-1007

App B

Object

ID

A- 1571	3.2.5.2.9.2.1.1.0-1	(U) The Surveillance System shall be able to withstand contamination/decontamination as described herein while in the movement configuration. Items packaged in NBC protective ISO containers are protected by the containers.	CPG-1007	3.2.5.2.9.2.0-
A-549	3.2.5.2.8.0-1	b(1)	CPG-288	3.2.1.1.0-10
A-547	3.2.5.2.7.0-2	(U) The Fire Control System LRUs or equipment cabinets as appropriate, except for GFE, shall meet performance requirements in 3.2.1.3 Performance Characteristics, Fire Control System and 3.2.4 System Quality Factors following exposure to an electrostatic discharge of b(3) n series resistance. (U) Note: ESD discharges directly to connector pins are not included. This only includes ESD discharges to LRU or equipment cabinet external surfaces, as appropriate.		3.2.5.2.7.0-1
		Performance Characteristics, Surveillance System and 3.2.4 System Quality Factors following exposure to an electrostatic discharge of b(3) in series resistance. (U) Note: ESD discharges directly to connector pins are not included. This only includes ESD discharges to LRU or equipment cabinet external surfaces, as appropriate.		

contamination/decontamination as described herein while in the movement

configuration. Items packaged in NBC protective ISO containers are

(U) The Fire Control System shall be able to withstand

ID

Object Number

3.2.5.2.9.2.1.1.0-2

A-

1574

A-546 3.2.5.2.7.0-1

movement configurations.

Dec. 4, 2009 - JLENS A-Specification (S/NF)

protected by the containers.

CPG PIDS

Section

App B

Section

CPG PIDS

Object ID

App B

Object

ID

9

A-552	3.2.5.2.9.2.2.1.0-1	b(3)	CPG-1009	3.2.5.2.9.2.0-	
A-553	3.2.5.2.9.2.2.1.0-2	b(3)	CPG-1009	3.2.5.2.9.2.0-	
A-555	3.2.5.2.9.2.2.2.0-1	b(3)	CPG-1010	3.2.5.2.9.2.0-	
A-556	3.2.5.2.9.2.2.2.0-2	b(3)	CPG-1010	3.2.5.2.9.2.0-	
A-558	3.2.5.2.9.2.2.3.0-1	(U) The Surveillance System, after subjection to worst case chemical and biological contamination, as specified herein, shall be restorable to an operational condition such that use of MOPP IV need not be continued, after being decontaminated using JLENS specific decontamination procedures.	CPG-1011	3.2.5.2.9.2.0-	
A-559	3.2.5.2.9.2.2.3.0-2	(U) The Fire Control System, after subjection to worst case chemical and biological contamination, as specified herein, shall be restorable to an operational condition such that use of MOPP IV need not be continued, after being decontaminated using JLENS specific decontamination procedures.	CPG-1011	3.2.5.2.9.2.0-	
A-561	3.2.5.2.9.2.2.4.0-1	(U) The Surveillance System shall meet all performance requirements in	CPG-1012	3.2.5.2.9.2.0-	

ID

Object Number

3.2.1.2 Performance Characteristics, Surveillance System, during and

following exposure to NBC contaminants while in the Tactical Mode of the

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		Operations State and in the operations configuration.				
A-562	3.2.5.2.9.2.2.4.0-2	(U) The Fire Control System shall meet all performance requirements in 3.2.1.3 <i>Performance Characteristics, Fire Control System</i> during and following exposure to NBC contaminants while in the Tactical Mode of the Operations State and in the operations configuration.	CPG-1012		3.2.5.2.9.2.0-9	
A- 1666	3.2.5,2.9,2.2.5.0-1	(U) The Surveillance System design shall be such that trained and acclimatized personnel can operate and maintain external mission critical equipment while wearing a full NBC protective ensemble MOPP IV gear without further contaminating the system.	CPG-1013		3.2.5.2.9.2.0- 10	
A- 1667	3.2.5.2.9.2.2.5.0-2	(U) The Fire Control System design shall be such that trained and acclimatized personnel can operate and maintain external mission critical equipment while wearing a full NBC protective ensemble MOPP IV gear without further contaminating the system.	CPG-1013		3.2.5.2.9.2.0- 10	
A-571	3.2.6.1.1.0-1	b(3)	CPG-1018		3.2.6.1.0-1	
A-573	3.2.6.1.1.1.0-1		CPG-2604		3.2.3.3.0-2	
		b(3)				
A-575	3.2.6.1.1.2.0-1	(U) The JLENS Orbit, in the appropriate operational mode, shall meet performance requirements in 3.2.1 <i>Performance Characteristics</i> and 3.2.4 <i>System Quality Factors</i> after exposure to the Railroad Transportation vibrations NGT than 0.488 g rms longitudinal, 0.488 g rms vertical, and 0.488 g rms lateral, incurred while in the movement configuration.	CPG-1019		3.2.6.1.0-2	
A-519	3.2.6.1.1.3.0-1	(U) The JLENS Orbit, while in the appropriate operational mode, shall meet performance requirements specified in 3.2.1 <i>Performance Characteristics</i> and 3.2.4 <i>System Quality Factors</i> after being subjected to rail impact static	CPG-1021		3.2.6.1.0-5	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		equivalent loads NGT 5.0 g longitudinal, 3.0 g vertical and 3.0 g lateral, incurred while in the transport configuration. Note: The accelerations provided here are applied to the center of mass of the ISO container. Accelerations on individual components will depend on packaging.				
A-578	3.2.6.1.2.1.0-1	(U) The JLENS Orbit, in the Transport Mode, shall be transportable on highways defined in MIL-STD-1366D including an allowance for special permits where the limits for load, vibration, and shock are presented in Appendix E.	CPG-1024		3.2.6.2.0-2	
A-580	3.2.6.1.2.2.0-1	(U) The JLENS Orbit, in the transport configuration, shall be transportable on secondary roads, see 6.2, where the limits for load, vibration, and shock are presented in Appendix E.	CPG-1025		3.2.6.2.0-3	
A-582	3.2.6.1.2.3.0-1	(U) The JLENS Orbit, in the transport configuration, shall be transportable on unimproved roads, see 6.2, where the limits for load, vibration, and shock are presented in Appendix E.	CPG-1026		3.2.6.2.0-4	
A-584	3.2.6.1.2.4.0-1	(U) The JLENS Orbit, in the transport configuration, shall be transportable off-road for b(3)	CPG-1023		3.2.6.2.0-1	
A-586	3.2.6.1.2.5.0-1	(U) The JLENS Orbit, in the appropriate operational mode, shall meet performance requirements in 3.2.1 <i>Performance Characteristics</i> and 3.2.4 <i>System Quality Factors</i> after exposure to the Large Assembly Transport vibration where the vibration levels are NGT those represented by the Perryman Cross-Country Course No. 1 and the mobility profile for primary, secondary and unimproved roads given in Table IX, in the transport configuration.	CPG-1026		3.2.6.2.0-4	
A-589	3.2.6.2.1.0-1	(U) The JLENS Orbit, in the transport configuration, shall be marine transportable in accordance with MIL-STD-1366D section titled <i>Water Transportation (Load on / Load off)</i> , where load limits and vibrations are presented in Appendix E.	CPG-1029		3.2.6.3.0-1	
A-591	3.2.6.2.2.0-1	(U) The JLENS Orbit, in the appropriate operational mode, shall meet performance requirements in 3.2.1 <i>Performance Characteristics</i> and 3.2.4 <i>System Quality Factors</i> after exposure to the Ship Transportation vibrations NGT 0.315 g rms longitudinal, 0.315 g rms vertical, and 0.315 g rms	CPG-1030		3.2.6.3.0-2	

		SECRET/NOFORN		5 7		
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		lateral, incurred while in the transport configuration.				
A-594	3.2.6.3.1.0-1	(U) The JLENS Orbit, in the transport configuration, shall be transportable on C-130 (except the mobile mooring station, associated peculiar support equipment, and ISOs or shelters which differ from 8' x 8' x 20'), C-5 and C-17 aircraft. The shock and vibrations experienced during C-130, C-5, and C-17 aircraft transport are presented in Appendix E.	CPG-1033		3.2.6.4.0-1	
A-596	3.2.6.3.2.0-1	(U) The JLENS Orbit, in the appropriate operational mode, shall meet performance requirements in 3.2.1 <i>Performance Characteristics</i> and 3.2.4 <i>System Quality Factors</i> after exposure to the aircraft random vibrations NGT 5.17 g rms longitudinal, 5.17 g rms vertical, and 5.17 g rms lateral, incurred while in the transport configuration.	CPG-1034		3.2.6.4.0-2	
A- 1609	3.2.6.4.0-1	(U) The JLENS Orbit equipment in transport configuration shall have lift and tie-down provision in accordance with MIL-STD-209K section titled Lifting Provisions and Equipment Tie-down Provisions.	CPG-1038		3.2.6.5.0-1	
A- 6894	3.2.6.4.1.0-1	(U) Transportation enclosures which are non-GFE and delivered as part of the Orbit shall protect the equipment contained within the enclosure from damage due to: a. Temperature extremes, as needed b. Snow c. Rain d. Hail e. High humidity f. Wind g. Blowing sand h. Lightning b(3) j. NBC	CPG-1039		3.2.6.5.0-2	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
	1	as specified in section 3.2.5 Environmental Conditions when in the transport configuration.				
A- 1572	3.2.6.4.2.0-1	(U) Transportation enclosures which are non-GFE and delivered as part of the Surveillance System shall be able to withstand contamination/decontamination described herein such that it protects the equipment contained within the enclosure.	CPG-1008		3.2.5.2.9.2.0-5	
A- 1575	3.2.6.4.2.0-2	(U) Transportation enclosures which are non-GFE and delivered as part of the Fire Control System shall be able to withstand contamination/decontamination described herein such that it protects the equipment contained within the enclosure.	CPG-1008		3.2.5.2.9.2.0-5	
A-601	3.2.6.4.4.0-1	(U) The JLENS Orbit, in the transport configuration, shall meet the U.S. Department of Transportation (DOT), NATO, and European Union (EU) Performance-Oriented Packaging (POP) standards for unrestricted highway, rail, and sea transportation.	CPG-1050		3.2.6.5.0-4	
A- 2126	3.3.1.2.0-1	(U) The Surveillance System shall be designed such that components containing hazardous materials listed in the EPA-17 and Class I Ozone Depleting Substances are only utilized in compliance with the JLENS Hazardous Materials Management Plan (HMMP). Note: Appendix A contains the aforementioned lists.	CPG-1055		3.3.1.2.0-1	
A- 2127	3.3.1.2.0-2	(U) The Fire Control System shall be designed such that components containing hazardous materials listed in the EPA-17 and Class I Ozone Depleting Substances are only utilized in compliance with the JLENS Hazardous Materials Management Plan (HMMP). Note: Appendix A contains the aforementioned lists.	CPG-1055		3.3.1.2.0-1	
A-726	3.3.2.1.0-1	(U) The JLENS Orbit shall have all equipment marked in accordance with MIL-STD-130L for unique identification with the following provisos and exceptions. (U) Provisos to this requirement are:	CPG-1057 CPG-1065		3.3.2.0-1 3.3.2.0-2	
		a. Only hardware and software items with a unit acquisition cost NLT \$5,000.				

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		b. All hardware items with a unit acquisition cost less than \$5,000 when they are serially managed, mission critical, or controlled inventory items. (U) Exceptions to this requirement are as specified in MIL-STD-130L				
		section titled <i>Detailed Requirements</i> subsection titled <i>Exemptions</i> : a. "COTS items marked with commercial identification (firm name, logo, part number, etc.), and which present no identification difficulty may be exempt from additional marking requirements. This exemption extends to COTS items identified on a VICD."				
		b. "Parts within an assembly or a sub-assembly, that are not subject to removal, replacement, or repair or"				
		c. "When parts are deemed too small for the application of complete marking in accordance with MIL-STD-130L section titled <i>Machine-readable information (MRI) marking</i> , a logo or other abbreviated marking [will] be substituted for the design activity identification."				
A- 2092	3.3.2.2.0-1	(U) The Surveillance System shall utilize safety warning labels compliant with ANSI Z535.	CPG-1083		3.3.3.1.1.0-9	
A- 2093	3.3.2.2.0-2	(U) The Fire Control System shall utilize safety warning labels compliant with ANSI Z535.	CPG-1083		3.3.3.1.1.0-9	
A-616	3.3.3.1.0-1	(U) The Surveillance System shall have no hazards, see 6.2, with Mishap Risk Categories rated "High" or "Serious", see Appendix A.3 (from MIL-STD-882D), associated with RF radiation.	CPG-1089 CPG-1124		3.3.3.1.1.0- 11 3.3.3.1.6.0-1	
A- 10316	3.3.3.1.0-2	(U) The Fire Control System shall have no hazards, see 6.2, with Mishap Risk Categories rated "High" or "Serious", see Appendix A.3 (from MIL-STD-882D), associated with RF radiation.	CPG-1089 CPG-1124		3.3.3.1.1.0- 11 3.3.3.1.6.0-1	
A- 1817	3.3.3.1.0-3	(U) The Surveillance System shall provide safety devices, see 6.2, to mitigate personnel falling hazards to a hazard Mishap Risk Category, see Appendix A.3, of "Medium" or "Low."	CPG-1080		3.3.3.1.1.0-6	

•	_	`
2	⋍	′
(_	•
(Ξ	כ
(Ċ)
Ć	7	5
	7	(

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 10317	3.3.3.1.0-4	(U) The Fire Control System shall provide safety devices, see 6.2, to mitigate personnel falling hazards to a hazard Mishap Risk Category, see Appendix A.3, of "Medium" or "Low."	CPG-1080		3.3.3.1.1.0-6	
A- 1818	3.3.3.1.0-5	(U) The Surveillance System shall have no hazards with Mishap Risk Categories rated "High" or "Serious," see Appendix A.3, related to equipment motion.	CPG-406 CPG-1079 CPG-1081 CPG-1089 CPG-1113 CPG-1114 CPG-1128 CPG-1131 CPG-1132		3.2.1.5.1.0-5 3.3.3.1.1.0-5 3.3.3.1.1.0-7 3.3.3.1.1.0- 11 3.3.3.1.3.0-1 3.3.3.1.3.0-2 3.3.3.2.0-1 3.3.3.2.0-3 3.3.3.2.0-4	
A- 10318	3.3.3.1.0-6	(U) The Fire Control System shall have no hazards with Mishap Risk Categories rated "High" or "Serious," see Appendix A.3, related to equipment motion.	CPG-1133 CPG-406 CPG-1078 CPG-1081 CPG-1089 CPG-1113 CPG-1114 CPG-1128 CPG-1131 CPG-1132 CPG-1133		3.3.3.2.0-5 3.2.1.5.1.0-5 3.3.3.1.1.0-7 3.3.3.1.1.0-11 3.3.3.1.3.0-1 3.3.3.1.3.0-2 3.3.3.2.0-1 3.3.3.2.0-3 3.3.3.2.0-4	

ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
					3.3.3.2.0-5	
A-	3.3.3.1.0-7	(U) The Surveillance System shall have no hazards with Mishap Risk Categories rated "High" or "Serious," see Appendix A.3, related to fire.	CPG-406		3.2.1.5.1.0-5	
3864			CPG-1078		3.3.3.1.1.0-4	
			CPG-1089		3.3.3.1.1.0-	
			CPG-1118		11	
			CPG-1119		3.3.3.1.4.0-1	
			CPG-1121	- 11	3.3.3.1.4.0-2	
			CPG-1122		3.3.3.1.5.0-1	
			CPG-1128		3.3.3.1.5.0-2	
			CPG-1131		3.3.3.2.0-1	
			CPG-1132		3.3.3.2.0-3	
			CPG-1133	3.3.3.2.0-4		
					3.3.3.2.0-5	
A- 0319	3.3.3.1.0-8	(U) The Fire Control System shall have no hazards with Mishap Risk Categories rated "High" or "Serious," see Appendix A.3, related to fire.	CPG-406		3.2.1.5.1.0-5	
0319		Categories rated High of Serious, see Appendix A.3, related to fire.	CPG-1078		3.3.3.1.1.0-4	
			CPG-1089		3.3.3.1.1.0-	
			CPG-1118		11	
			CPG-1119		3.3.3.1.4.0-1	
			CPG-1121		3.3.3.1.4.0-2	
			CPG-1122		3.3.3.1.5.0-1	
		CPG-1	CPG-1128	1	3.3.3.1.5.0-2	
			CPG-1131		3.3.3.2.0-1	
			CPG-1132	1	3.3.3.2.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
			CPG-1133		3.3.3.2.0-4	
					3.3.3.2.0-5	
A-	3.3.3.1.0-9 (U) The Surveillance System shall have no hazards with Mishap Risk	CPG-406		3.2.1.5.1.0-5		
1816		Categories rated "High" or "Serious," see Appendix A.3, resulting in equipment damage due to overheating.	CPG-1082		3.3.3.1.1.0-8	
	equipment damage due to overneating.	CPG-1089		3.3.3.1.1.0-		
		CPG-1128		11		
			CPG-1131		3.3.3.2.0-1	
			CPG-1132		3.3.3.2.0-3	
			CPG-1133		3.3.3.2.0-4	
			CPG-1135		3.3.3.2.0-5	
					3.3.3.3.0-1	
Α-	3.3.3.1.0-10		CPG-406		3.2.1.5.1.0-5	
1828		Categories rated "High" or "Serious," see Appendix A.3, resulting in equipment damage due to overheating.	CPG-1082		3.3.3.1.1.0-8	
		The state of the s	CPG-1089		3.3.3.1.1.0-	
			CPG-1128		11	
			CPG-1131		3.3.3.2.0-1	
			CPG-1132		3.3.3.2.0-3	
			CPG-1133		3.3.3.2.0-4	
			CPG-1135		3.3.3.2.0-5	
					3.3.3.3.0-1	
A- 1820	3.3.3.1.0-11	(U) The Surveillance System shall have no single point failures, see 6.2,	CPG-1077		3.3.3.1.1.0-3	
1820		which result in a hazard with a Mishap Risk Category of "High" or "Serious".	CPG-1098		3.3.3.1.2.0-6	
			CPG-1099		3.3.3.1.2.0-7	

Dec. 4, 2009 - JLENS A-Specification (S/NF)

(U) The Fire Control System shall have no single point failures which result

in a hazard with a Mishap Risk Category of "High" or "Serious".

CPG PIDS

Section

3.3.3.1.1.0-3

3.3.3.1.2.0-6

3.3.3.2.0-4

App B

Section

CPG PIDS

Object ID

CPG-1077

CPG-1098

App B

Object

ID

			CPG-1099	3.3.3.1.2.0-7			
A-	3.3.3.1.0-13	(U) The Surveillance System shall have no hazards with Mishap Risk	CPG-406	3.2.1.5.1.0-5			
1837		Categories of "High" or "Serious" associated with voltage and/or current.	CPG-1089	3.3.3.1.1.0-			
			CPG-1091	11			
			CPG-1093	3.3.3.1.1.0-			
			CPG-1094	3.3.3.1.2.0-1			
			CPG-1095	3.3.3.1.2.0-2			
			CPG-1097	3.3.3.1.2.0-3			
						CPG-1100	3.3.3.1.2.0-5
					CPG-1101	3.3.3.1.2.0-8	
			CPG-1102	3.3.3.1.2.0-9			
			CPG-1103	3.3.3.1.2.0-			
			CPG-1107	10			
			CPG-1108	3.3.3.1.2.0-			
			CPG-1128	11			
			CPG-1131	3.3.3.1.2.0- 12			
			CPG-1132	3.3.3.1.2.0-			
			CPG-1133	13			
				3.3.3.2.0-1			
				3.3.3.2.0-3			

000997

ID

A-

1827

Object Number

3.3.3.1.0-12

c		5
1	_	٦
•		٦
>		≺
>	÷	≺
>	⇆	₹
(χ	J

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
					3.3.3.2.0-5	
A-	3.3.3.1.0-14	(U) The Fire Control System shall have no hazards with Mishap Risk	CPG-406		3.2.1.5.1.0-5	
1838		Categories of "High" or "Serious" associated with voltage and/or current.	CPG-1089		3.3.3.1.1.0-	
			CPG-1091		11	
			CPG-1093		3.3.3.1.1.0- 13	
			CPG-1094		3.3.3.1.2.0-1	
		CPG-1095		3.3.3.1.2.0-2		
			CPG-1097		3.3.3.1.2.0-3	
			CPG-1100		3.3.3.1.2.0-5	
			CPG-1101		3.3.3.1.2.0-8	
			CPG-1102		3.3.3.1.2.0-9	
			CPG-1103		3.3.3.1.2.0-	
			CPG-1107		10	
			CPG-1108		3.3.3.1.2.0-	
			CPG-1128		11	
			CPG-1131		3.3.3.1.2.0- 12	
			CPG-1132		3.3.3.1.2.0-	
			CPG-1133		13	
					3.3.3.2.0-1	
					3.3.3.2.0-3	
					3.3.3.2.0-4	
					3.3.3.2.0-5	
A-	3.3.3.2.0-1	(U) The Surveillance System shall comply with the applicable portions of	CPG-1073		3.3.3.1.1.0-1	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App E Section
1825		MIL-HDBK-454A Guidelines on Personnel Hazards, Flammability, and Electrical Overload Protection.	CPG-1096 CPG-1109 CPG-1110 CPG-1111 CPG-1115		3.3.3.1.2.0-4 3.3.3.1.2.0- 14 3.3.3.1.2.0- 15 3.3.3.1.2.0- 16 3.3.3.1.3.0-3	
A- 1829	3.3.3.2.0-2	(U) The Fire Control System shall comply with the applicable portions of MIL-HDBK-454A Guidelines on Personnel Hazards, Flammability, and Electrical Overload Protection.	CPG-1073 CPG-1096 CPG-1109 CPG-1110 CPG-1111		3.3.3.1.2.0-4 3.3.3.1.2.0-14 3.3.3.1.2.0-15 3.3.3.1.2.0-16 3.3.3.1.3.0-3	
A- 1831	3.3.3.3.0-1	(U) The Surveillance System shall provide local emergency power shutdown, see 6.2, capability at manned shelters and locations.	CPG-1126		3.3.3.1.7.0-1	
A- 1832	3.3.3.3.0-2	(U) The Fire Control System shall provide local emergency power shutdown capability at manned shelters and locations.	CPG-1126		3.3.3.1.7.0-1	
A- 2088	3.3.3.5.0-1	(U) The Surveillance System shall have barriers to prevent accidental contact of personnel to surface temperatures outside the limits specified in MIL-STD-1472F section titled <i>Thermal Contact Hazards</i> .	CPG-1116		3.3.3.1.3.0-4	
A- 2089	3.3.3.5.0-2	(U) The Fire Control System shall have barriers to prevent accidental contact of personnel to surface temperatures outside the limits specified in MIL-STD-1472F section titled <i>Thermal Contact Hazards</i> .	CPG-1116		3.3.3.1.3.0-4	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A-618	3.3.3.6.0-1	(U) The Surveillance System, in all configurations, shall have acoustic noise levels and durations that comply with MIL-STD-1474D requirement titled <i>Steady-State Noise</i> , <i>Personnel Occupied Areas</i> and MIL-STD-1472F section titled <i>Acoustical Noise</i> . Hearing protection may be required for some activities.	CPG-1088		3.3.3.1.1.0-	
A- 2090	3.3.3.6.0-2	(U) The Fire Control System, in all configurations, shall have acoustic noise levels and durations that comply with MIL-STD-1474D requirement titled Steady-State Noise, Personnel Occupied Areas and MIL-STD-1472F section titled Acoustical Noise. Hearing protection may be required for some activities.	CPG-1088		3.3.3.1.1.0-	
A- 2132	3.3.3.7.0-1	(U) The Surveillance System shall initialize (power-up) into a safe state, see 6.2.	CPG-290		3.2.1.2.0-1	
A- 2133	3.3.3.7.0-2	(U) The Fire Control System shall initialize (power-up) into a safe state.	CPG-290		3.2.1.2.0-1	
A- 2150	3.3.3.8.0-1	(U) The Surveillance System shall allow the system to perform a function which inherently increases Mishap Probability only if one of the following conditions are satisfied: a. All relevant pre-requisite safety checks are passed prior to performing the potentially hazardous function. b. The safety checks have been explicitly over-ridden.	CPG-404 CPG-407 CPG-1074		3.2.1.5.1.0-3 3.2.1.5.1.0-6 3.3.3.1.1.0-2	
A- 2151	3.3.3.8.0-2	(U) The Fire Control System shall allow the system to perform a function which inherently increases Mishap Probability only if one of the following conditions are satisfied: a. All relevant pre-requisite safety checks are passed prior to performing the potentially hazardous function. b. The safety checks have been explicitly over-ridden.	CPG-404 CPG-407 CPG-1074		3.2.1.5.1.0-3 3.2,1.5.1.0-6 3.3.3.1.1.0-2	
A- 2135	3.3.3.9.0-1	(U) The Surveillance System shall have hardware safety interlocks which cannot be overridden by software.	CPG-1090		3.3.3.1.1.0- 12	

_	_
Ç	3
C	⊃
	_
C	\supset
Č	3
	2

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 2136	3.3.3.9.0-2	(U) The Fire Control System shall have hardware safety interlocks which cannot be overridden by software.	CPG-1090		3.3.3.1.1.0- 12	
A- 2144	3.3.3.10.0-1	(U) The Surveillance System software shall deliver safety critical alerts to the operator.	CPG-763 CPG-1129 CPG-1133		3.2.1.17.0-6 3.3.3.2.0-2 3.3.3.2.0-5	
A- 2145	3.3.3.10.0-2	(U) The Fire Control System software shall deliver safety critical alerts to the operator.	CPG-763 CPG-1129 CPG-1133		3.2.1.17.0-6 3.3.3.2.0-2 3.3.3.2.0-5	
A- 2147	3.3.3.11.0-1	(U) The Surveillance System software shall display a hazardous condition alert.	CPG-764		3.2.1.17.0-7	
A- 2148	3.3.3.11.0-2	(U) The Fire Control System software shall display a hazardous condition alert.	CPG-764		3.2.1.17.0-7	
A- 2158	3.3.3.12.0-1	(U) The Surveillance System shall provide for a safe shutdown, whether operator initiated or automatic.	CPG-303 CPG-865		3.2.1.2.0-11 3.2.3.2.0-7	
A- 2159	3.3.3.12.0-2	(U) The Fire Control System shall provide for a safe shutdown, whether operator initiated or automatic.	CPG-303 CPG-865		3.2.1.2.0-11 3.2.3.2.0-7	
A-620	3.3.4.0-1	(U) The JLENS Orbit workspaces, user interface displays, and controls shall be designed using the guidance of MIL-STD-1472F, sections titled Control/Display Integration, Visual Displays, Audio Displays, Controls, Labeling and User-Computer Interface.	CPG-406 CPG-762 CPG-763 CPG-764 CPG-870 CPG-872 CPG-1013		3.2.1.5.1.0-5 3.2.1.17.0-5 3.2.1.17.0-6 3.2.1.17.0-7 3.2.3.3.0-4 3.2.3.3.0-6 3.2.5.2.9.2.0-10	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
			CPG-1129		3.3.3.2.0-2	
			CPG-1150		3.3.4.4.0-1	
			CPG-1151		3.3.4.4.0-2	
			CPG-1152		3.3.4.4.0-3	
			CPG-1153		3.3.4.4.0-4	
A-624	3.3.4.1.0-1	(U) The JLENS Orbit shall be operable, maintainable and supportable by	CPG-871		3.2.3.3.0-5	
	protective clothing (co (MOPP) IV) in accord	5th to 95th percentile of Army personnel while wearing Combat Gear and protective clothing (cold weather Mission Oriented Protective Posture	CPG-874		3.2.3.3.0-8	
		(MOPP) IV) in accordance with MIL-STD-1472F, sections titled <i>Physical</i>	CPG-1013		3.2.5.2.9.2.0-	
		Accommodation, Workspace Design, and Design for Maintainer.	CPG-1138		10	
			CPG-1139		3.3.4.1.0-1	
			CPG-1140		3.3.4.1.0-2	
			CPG-1141		3.3.4.1.0-3	
			CPG-1142		3.3.4.1.0-4	
			CPG-1143		3.3.4.1.0-5	
			CPG-1144		3.3.4.1.0-6	
					3.3.4.1.0-7	
A-626	3.3.4.2.0-1	(U) The Surveillance System shall have environmental control systems and	CPG-761		3.2.1.17.0-4	
		other features that support human physical needs, endurance, and comfort during extended operations as specified in MIL-STD-1472F, section titled	CPG-884		3.2.3.4.0-1	
		Environment.	CPG-885		3.2.3.4.0-2	
			CPG-887		3.2.3.5.0-1	
		CPG-1146		3.3.4.2.0-1		
A-	3.3.4.2.0-2	(U) The Fire Control System shall have environmental control systems and	CPG-884		3.2.3.4.0-1	
1746		other features that support human physical needs, endurance, and comfort during extended operations as specified in MIL-STD-1472F, section titled	CPG-885		3.2.3.4.0-2	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		Environment.	CPG-887		3.2.3.5.0-1	
			CPG-1146		3.3.4.2.0-1	
A-628	3.3.4.3.0-1	(U) The operator stations in the Surveillance System shall have human-to-machine interfaces which are designed to use state-of-the-art computer and display technology.	CPG-1148		3.3.4.3.0-1	
A- 1747	3.3.4.3.0-2	(U) The operator stations in the Fire Control System shall have human-to-machine interfaces which are designed to use state-of-the-art computer and display technology.	CPG-1148		3.3.4.3.0-1	
A-630	3.3.4.4.0-1	(U) The Surveillance System Mission Operations and Mission Support displays shall have symbology consistent with MIL-STD-2525B and MIL-STD-1477C.	CPG-755		3.2.1.17.0-1	
A- 1748	3.3.4.4.0-2	(U) The Fire Control System Mission Operations and Mission Support displays shall have symbology consistent with MIL-STD-2525B and MIL-STD-1477C.	CPG-755 CPG-756		3.2.1.17.0-1 3.2.1.17.0-2	
A-634	3.3.5.1.1.0-1		CPG-1156		3.3.5.1.0-1	
		b(3)				
A-635	3.3.5.1.1.0-2		CPG-1156		3.3.5.1.0-1	
		b(3)				
A- 1671	3.3.5.1.1.0-3	b(3)	CPG-2501		3.3.5.1.0-2	
A- 1674	3.3.5.1.1.0-4	b(3)	CPG-2501		3.3.5.1.0-2	
A- 1694	3.3.5.1.1.0-5	b(3)	CPG-1169		3.3.5.1.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 1695	3.3.5.1.1.0-6	b(3)	CPG-1169		3.3.5.1.0-3	
A- 1675	3.3.5.1.1.0-7	b(3)	CPG-2500		3.3.5.1.0-4	
A- 1676	3.3.5.1.1.0-8	b(3)	CPG-2500		3.3.5.1.0-4	
A- 1678	3.3.5.1.1.0-9	b(3)	CPG-2589		3.3.5,2.0-4	
A- 1679	3.3.5.1.1.0-10	b(3)	CPG-2589		3.3.5.2.0-4	
A- 1681	3.3.5.1.1.0-11	(U) The Surveillance System shall only use binary or machine executable public domain software products or other software products, such as those commonly known as freeware of shareware, that have been assessed for information assurance impacts or which have been approved by the DAA.	CPG-2585		3.3.5,2.0-2	
A- 1682	3.3.5.1.1.0-12	(U) The Fire Control System shall only use binary or machine executable public domain software products or other software products, such as those commonly known as freeware of shareware, that have been assessed for information assurance impacts or which have been approved by the DAA.	CPG-2585		3.3.5.2.0-2	
A- 111699	3.3.5,1.1.0-13	(U) The security support structure of the Surveillance System shall be isolated. Means of isolation may include the use of partitions and/or domains that control access to and integrity of hardware, software, and firmware that perform security functions.	CPG-2505		3.3.5.1.0-5	
A- 111698	3.3.5.1.1.0-14	(U) The security support structure of the Fire Control System shall be isolated. Means of isolation may include the use of partitions and/or domains that control access to and integrity of hardware, software, and firmware that perform security functions.	CPG-2505		3.3.5.1.0-5	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 1699	3.3.5.1.2.0-1	b(3)	CPG-1161		3.3.5.2.0-1	
A- 1700	3.3.5.1.2.0-2	b(3)	CPG-1161		3.3.5.2.0-1	
A- 111705	3.3.5.1.2.0-3	b(3)	CPG-2507		3.3.5.2.0-3	
A- 111704	3.3.5.1.2.0-4	b(3)	CPG-2507		3.3.5.2.0-3	
A-637	3.3.5.1.2.0-7	b(3)	CPG-1157 CPG-1158 CPG-1162		3.3.5.5.0-1 3.3.5.5.0-2 3.3.5.2.0-5	
A-638	3.3.5.1.2.0-8	b(3)	CPG-1157 CPG-1158 CPG-1162		3.3.5.5.0-1 3.3.5.5.0-2 3.3.5.2.0-5	
A- 111703	3.3.5.1.2.0-9	b(3)	CPG-2577		3.3.5.2.0-6	
A- 111702	3.3.5.1.2.0-10	b(3)	CPG-2577		3.3.5.2.0-6	
A-	3.3.5.1.2.0-11	b(3)	CPG-1172		3.3.5.2.0-7	

ID						
Ш	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
1702		b(3)				
A- 1703	3.3.5.1.2.0-12	b(3)	CPG-1172		3.3.5.2.0-7	
A-643	3.3.5.1.2.0-13	(U) The Surveillance System shall implement virus protection for all servers, workstations, and mobile computing devices.	CPG-1164		3.3.5.2.0-8	
A-644	3.3.5.1.2.0-14	(U) The Fire Control System shall implement virus protection for all servers, workstations, and mobile computing devices.	CPG-1164		3.3.5.2.0-8	¥:
	3.3.5.1.3.0-1		CPG-728		3.2.1.15.0-12	
1686		b(3)	CPG-1165		3.3.5.3.0-1	
	3.3.5.1.3.0-2		CPG-728		3.2.1.15.0-12	
1687		b(3)	CPG-1165		3.3.5.3.0-1	
A- :	3.3.5.1.4.0-1	(U) The Surveillance System shall implement locks and alarms for the	CPG-873		3.2.3.3.0-7	
1692		protection of classified information systems in accordance with the appropriate level of classification.	CPG-1168		3.3.5.4.0-1	
527950	3.3.5.1.4.0-2	(U) The Fire Control System shall implement locks and alarms for the	CPG-873		3.2.3.3.0-7	
1693		protection of classified information systems in accordance with the appropriate level of classification.	CPG-1168		3.3.5.4.0-1	
A-658	3.3.5.2.0-1		CPG-2398		3.3.5.6.0-3	
		b(3)				
A-662	3.3.5.3.0-1	b(3)	CPG-1171		3.3.5.6.0-1	
			CPG-2418		3.3.5.6.0-2	

C	⊃
C	\supset
_	_
C	\supset
	Ď
-	J
	•

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A-663	3.3.5.3.0-2	b(3)	CPG-1171 CPG-2418		3.3.5.6.0-1 3.3.5.6.0-2	
A-698	3.4.1.0-1	(U) The Surveillance System design shall comply with the applicable information technology standards contained in the DoD Information Technology Standards Registry (DISR).	CPG-1199		3.4.0-1	
A-699	3.4.1.0-2	(U) The Fire Control System design shall comply with the applicable information technology standards contained in the DoD Information Technology Standards Registry (DISR).	CPG-1199		3.4.0-1	
A-709	3.5.2.2.2.0-1	b(3)	CPG-1205		3.5.2.0-1	
A-710	3.5.2.2.2.0-2	b(3)	CPG-1205		3.5.2.0-1	
A-712	3.5.2.2.3.0-1	b(3)	CPG-398 CPG-899		3.2.1.4.2.0-5 3.2.4.1.0-3	
A-713	3.5.2.2.3.0-2	b(3)	CPG-398 CPG-899		3.2.1.4.2.0-5 3.2.4.1.0-3	
A-715	3.5.3.0-1	(U) The JLENS Orbit shall be designed to use standard military vehicles, shelters and trailers unless the government approves justification for non-military equipment.	CPG-856 CPG-1208		3.2.3.1.0-1 3.5.3.0-2	
A-716	3.5.3.0-2	(U) The JLENS Orbit shall be designed such that standard military vehicles can be used for ground transportation.	CPG-1207		3.5.3.0-1	
A-718	3.5.4.0-1	(U) The JLENS Orbit shall be designed to use military lifting and handling equipment, unless the government approves justification for non-military equipment.	CPG-1211		3.5.4.0-2	

>
>
^
5
5
ิ้

525 T		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A-719	3.5.4.0-2	(U) The JLENS Orbit shall be designed such that standard military vehicles can be used for handling.	CPG-1210		3.5.4.0-1	
A-731	3.5.6.1.0-1	b(3)	CPG-1213		3.5.5.0-1	
A-732	3.5.6.1.0-2	b(3)	CPG-1213		3.5.5.0-1	
A-734	3.5.6.2.0-1	b(3)	CPG-302 CPG-1214		3.2.1.2.0-10 3.5.5.0-2	
A-735	3.5.6.2.0-2	b(3)	CPG-302 CPG-1214		3.2.1.2.0-10 3.5.5.0-2	
A- 1390	3.6.0-1	(U) The Surveillance System shall incorporate embedded training to support sustainment training of the operator and maintainers for the system hardware and software elements.	CPG-732 CPG-733 CPG-735 CPG-739 CPG-744 CPG-753		3.2.1.16.1.0- 1 3.2.1.16.1.0- 2 3.2.1.16.1.0- 4 3.2.1.16.1.0-	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App E Section
			CPG-2477 CPG-2661		3.2.1.16.2.0-1 3.2.1.16.4.0-2 3.2.1.16.1.0-11 3.2.1.16.1.0-5	
A- 6337	3.6.0-2	(U) The Fire Control System shall incorporate embedded training to support sustainment training of the operator and maintainers for the system hardware and software elements.	CPG-732 CPG-733 CPG-735 CPG-739 CPG-744 CPG-753 CPG-2477 CPG-2661		3.2.1.16.1.0-1 3.2.1.16.1.0-2 3.2.1.16.1.0-4 3.2.1.16.1.0-8 3.2.1.16.2.0-1 3.2.1.16.4.0-2 3.2.1.16.1.0-11 3.2.1.16.1.0-11	
A- 1392	3.6.1.0-1	(U) The Surveillance System shall incorporate embedded training which simulates realistic conditions.	CPG-732 CPG-733 CPG-735		3.2.1.16.1.0- 1 3.2.1.16.1.0-	

Dec. 4, 2009 - JLENS A-Specification (S/NF)

CPG PIDS

Section

App B

Section

CPG PIDS

Object ID

App B

Object

				ID		
			CPG-739		2	
			CPG-746		3.2.1.16.1.0-	
			CPG-752		4	
			CPG-2477		3.2.1.16.1.0- 8	
			CPG-2661		3.2.1.16.2.0-	
					3.2.1.16.4.0- 1	
					3.2.1.16.1.0- 11	
					3.2.1.16.1.0- 5	
A- 6338	3.6.1.0-2	(U) The Fire Control System shall incorporate embedded training which simulates realistic conditions.	CPG-732		3.2.1.16.1.0-	
0336		simulates realistic conditions.	CPG-733			
			CPG-735		3.2.1.16.1.0-	
			CPG-739		3.2.1.16.1.0-	
			CPG-746		4	
			CPG-752		3.2.1.16.1.0-	
			CPG-2477		8	
			CPG-2661		3.2.1.16.2.0-	
					3.2.1.16.4.0-	
					3.2.1.16.1.0- 11	

ID

Object Number

0	
001011	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
					3.2.1.16.1.0- 5	
A- 1394	3.6.2.0-1	(U) The Surveillance System shall incorporate embedded training which provides individual training by simulating problem situations that replicate actual mission operations.	CPG-732 CPG-733 CPG-734 CPG-745 CPG-746 CPG-752 CPG-2477		3.2.1.16.1.0-1 3.2.1.16.1.0-2 3.2.1.16.1.0-3 3.2.1.16.2.0-2 3.2.1.16.2.0-3 3.2.1.16.4.0-1 3.2.1.16.1.0-11	
A- 6339	3.6.2.0-2	(U) The Fire Control System shall incorporate embedded training which provides individual training by simulating problem situations that replicate actual mission operations.	CPG-732 CPG-733 CPG-734 CPG-745 CPG-746 CPG-2477		3.2.1.16.1.0-1 3.2.1.16.1.0-2 3.2.1.16.1.0-3 3.2.1.16.2.0-2 3.2.1.16.2.0-3 3.2.1.16.2.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
					11	
A- 1396	3.6.3.0-1	(U) The Surveillance System shall incorporate embedded training which provides team training by simulating problem situations that replicate actual mission operations.	CPG-732 CPG-733 CPG-745 CPG-746 CPG-748 CPG-752 CPG-2477 CPG-2662		3.2.1.16.1.0-1 3.2.1.16.1.0-2 3.2.1.16.2.0-2 3.2.1.16.2.0-3 3.2.1.16.3.0-1 3.2.1.16.3.0-2 3.2.1.16.4.0-1 3.2.1.16.1.0-11 3.2.1.16.3.0-4	
A- 6340	3.6.3.0-2	(U) The Fire Control System shall incorporate embedded training which provides team training by simulating problem situations that replicate actual mission operations.	CPG-732 CPG-733 CPG-745 CPG-746 CPG-748 CPG-749 CPG-752		3.2.1.16.1.0-1 3.2.1.16.1.0-2 3.2.1.16.2.0-2 3.2.1.16.2.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
			CPG-2477 CPG-2662		3.2.1.16.3.0- 1 3.2.1.16.3.0- 2 3.2.1.16.4.0- 1 3.2.1.16.1.0- 11 3.2.1.16.3.0- 4	
A- 1398	3.6.4.0-1	(U) The Surveillance System shall incorporate embedded training which provides unit collective training by simulating problem situations that replicate actual mission operations.	CPG-732 CPG-733 CPG-745 CPG-746 CPG-748 CPG-749 CPG-752 CPG-2477 CPG-2662		3.2.1.16.1.0-1 3.2.1.16.1.0-2 3.2.1.16.2.0-2 3.2.1.16.2.0-3 3.2.1.16.3.0-1 3.2.1.16.4.0-1 3.2.1.16.1.0-11	

	_
ò	3
-	_
C	\vec{z}
	_

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 6341	3.6.4.0-2	(U) The Fire Control System shall incorporate embedded training which provides unit collective training by simulating problem situations that replicate actual mission operations.	CPG-732 CPG-733 CPG-745 CPG-746 CPG-748 CPG-749 CPG-752 CPG-2477 CPG-2662		3.2.1.16.1.0-1 3.2.1.16.1.0-2 3.2.1.16.2.0-2 3.2.1.16.3.0-1 3.2.1.16.3.0-2 3.2.1.16.4.0-1 3.2.1.16.1.0-11 3.2.1.16.3.0-4	
A- 1402	3.6.6.0-1	(U) All embedded trainers and training devices, which are included as part of the Surveillance System, shall be designed for growth potential.	CPG-741		3.2.1.16.1.0- 10	
A- 6343	3.6.6.0-2	(U) All embedded trainers and training devices, which are included as part of the Fire Control System, shall be designed for growth potential.	CPG-741		3.2.1.16.1.0- 10	
A- 1403	3.6.6.0-3	(U) All embedded trainers and training devices, which are included as part of the Surveillance System, shall be designed for upgrade when doctrinal, procedural, software, or hardware changes to the tactical system are required.	CPG-739		3.2.1.16.1.0-	

_	_
C	⊃
C	3
	_
C	\supset
	_
(ת

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 6344	3.6.6.0-4	(U) All embedded trainers and training devices, which are included as part of the Fire Control System, shall be designed for upgrade when doctrinal, procedural, software, or hardware changes to the tactical system are required.	CPG-739		3.2.1.16.1.0-	
A- 1405	3.6.7.0-1	(U) The Surveillance System shall incorporate Distributed Interactive Simulation (DIS).	CPG-736 CPG-834		3.2.1.16.1.0- 6 3.2.2.2.0-21	
A- 6345	3.6.7.0-2	(U) The Fire Control System shall incorporate Distributed Interactive Simulation (DIS).	CPG-736 CPG-834		3.2.1.16.1.0- 6 3.2.2.2.0-21	
A- 1407	3.6.8.0-1	(U) The Surveillance System embedded trainer shall be interoperable through the Joint Semi-Automated Forces (JSAF) architecture to link simultaneously the live and virtual pieces of the training arena.	CPG-750		3.2.1.16.3.0-3	
A- 6346	3.6.8.0-2	(U) The Fire Control System embedded trainer shall be interoperable through the Joint Semi-Automated Forces (JSAF) architecture to link simultaneously the live and virtual pieces of the training arena.	CPG-750		3.2.1.16.3.0-3	
A- 1409	3.6.9.0-1	b(3)	CPG-736 CPG-737 CPG-834		3.2.1.16.1.0- 6 3.2.1.16.1.0- 7 3.2.2.2.0-21	
A- 6347	3.6.9.0-2	b(3)	CPG-736 CPG-737 CPG-834		3.2.1.16.1.0- 6 3.2.1.16.1.0- 7 3.2.2.2.0-21	
A- 1411	3.6.10.0-1	b(3)	CPG-733		3.2.1.16.1.0-	

	>
C	\supset
_	2
C	\supset
_	2
C	ກ

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		b(3)				
A- 6348	3.6.10.0-2	b(3)	CPG-733		3.2.1.16.1.0-2	
A- 1417	3.7.4.1.1.1.0-1	b(3)	CPG-897		3.2.4,1.0-1	
A- 1419	3.7.4.1.1.2.0-1	b(3)	CPG-898		3.2.4.1.0-2	
A- 1421	3.7.4.1.2.0-1	b(3)	CPG-927		3.2.4.4.0-1	
A- 1423	3.7.4.1.3.0-1	(U) The Communication and Processing Group shall collect data which can be used for prognostics from itself.	CPG-932		3.2.4.5.0-1	
A- 1424	3.7.4.1.3.0-2	(U) The Communication and Processing Group shall collect prognostics data from each of the other Prime Items.	CPG-932		3.2.4.5.0-1	
A- 1426	3.7.4.1.4.0-1	(U) The Communication and Processing Group shall have a communications payload weight of NGT 1100 lbs where the location and distribution of the weight includes aerostat stability requirements.	CPG-857		3.2.3.1.0-2	
A- 2257	3.7.4.1.5.0-1	b(3)	CPG-866		3.2.3.2.0-8	
A-	3.7.4.1.6.0-1	(U) The Communication and Processing Group shall act upon an EMCON	CPG-384		3.2.1.4.1.0-3	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
1187		command.	CPG-408		3.2.1.5.1.0-7	
			CPG-410		3.2.1.5.1.0-8	
			CPG-2395		3.2.1.5.1.0-9	
A- 1437	3.7.4.1.7.0-1	(U) The CPG processing station(s) shall provide protection for personnel from the effects of NBC contamination, as described in 3.2.5.2.9.1 <i>Nuclear, Biological, and Chemical, Definitions</i> , by an Environmental Control System (ECS), equipped with an integrated GFE Gas Particulate Filter Unit (GPFU) and through methodized use of an integral NBC protective entry vestibule in order to allow operation without MOPP IV gear during exposure.	CPG-1014		3.2.5.2.9.2.0-	
A- 6476	3.7.4.1.8.0-1	b(1)	CPG-2343	CPGX- 2813	3.2.1.1.0-6	0-1.0- 2.0-1.0-
A- 1441	3.7.4.1.8.0-2	b(1)	CPG-2344	CPGX- 778	3.2.1.1.0-7	0-1.0- 2.0-1.0-
A- 7018	3.7.4.1.8.0-3	b(3)	CPG-2417		3.2.1.1.0-9	
A- 1443	3.7.4.1.9.0-1	b(3)	CPG-2345		3.2.1.1.0-8	
A- 6427	3.7.4.1.9.0-2	b(1)	CPG-2402	CPGX- 5569	3.2.1.10.0-12	0-1.0- 2.0-4.0-
A- 6428	3.7.4.1.9.0-3	b(1)	CPG-2403	CPGX- 5570	3.2.1.10.0-13	0-1.0-2.0-4.0-

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
		b(1)				
A- 1450	3.7.4.1.10.1.0-1	(U) The Communication and Processing Group shall have automatic track initiation upon receipt of a local track from the associated radar.	CPG-2399		3.2.1.6.1.0-2	
A-	3.7.4.1.10.2.0-1	(U) When configured as part of a JLENS system (SuS or FCS), the	CPG-446		3.2.1.6.1.0-3	
1595		Communication and Processing Group shall process track data from the associated radar. In this context, track data includes all CID information	CPG-465		3.2.1.6.2.0-1	
		provided by the associated radar.	CPG-469		3.2.1.6.2.0-2	
			CPG-470		3.2.1.6.2.0-3	
			CPG-514		3.2.1.8.3.0-1	
			CPG-2434		3.2.1.6.1.0-4	
			CPG-2552		3.2.1.6.1.0-6	
A-	3.7.4.1.10.2.0-2	(U) When configured as part of a JLENS system (SuS or FCS) the Communication and Processing Group shall process track data from external sources.	CPG-445		3.2.1.6.1.0-1	
6980			CPG-446		3.2.1.6.1.0-3	
			CPG-459		3.2.1.6.1.0-5	
			CPG-463		3.2.1.6.1.0-8	
			CPG-465		3.2.1.6.2.0-1	
			CPG-2434		3.2.1.6.1.0-4	
			CPG-2553		3.2.1.6.1.0-7	
A- 113370	3.7.4.1.10.3.0-1	(U) The CPG shall use FCR provided b(3) along with information from external sources to determine target classification, see 6.2.		CPGX- 6012		0-1.0- 2.0-3.0-2
A- 13368	3.7.4.1.10.3.0-2	b(1)		CPGX- 6014		0-1.0- 2.0-3.0-4
				CPGX- 6016		0-1.0- 2.0-3.0-5
A-	3.7.4.1.10.3.0-3	b(1)		CPGX-		0-1.0-

Dec. 4, 2009 - JLENS A-Specification (S/NF)

b(1)

CPG PIDS

Section

3.2.1.16.1.0-

13

App B

Section

2.0-3.0-3

CPG PIDS

Object ID

CPG-2397

App B

Object

ID 6013

A-	3.7.4.1.10.4.0-1	(U) When configured as part of a JLENS system (SuS or FCS), the	CPG-500	3.2.1.8.2.0-1
6979	Communication and Processing Group shall correlate local IFF returns with local tracks.	CPG-501	3.2.1.8.2.0-2	
			CPG-502	3.2.1.8.2.0-3
			CPG-503	3.2.1.8.2.0-4
A-	3.7.4.1.11.1.0-1	(U) The Communication and Processing Group Communications and	CPG-851	3.2.2.3.0-7
1457		Control Shelter shall house the operator stations.	CPG-852	3.2.2.3.0-8
			CPG-853	3.2.2.3.0-9
			CPG-862	3.2.3.2.0-4
			CPG-869	3.2.3.3.0-3
A-	3.7.4.1.11.2.0-1	(U) The Communication and Processing Group Data Processing Shelter	CPG-862	3.2.3.2.0-4
1459		shall house the associated radar's signal data processors.	CPG-869	3.2.3.3.0-3
A-	3.7.4.1.11.3.0-1	(U) The Communication and Processing Group Communications and	CPG-862	3.2.3.2.0-4
1461		Control Shelter shall house the ground based communications equipment.	CPG-869	3.2.3.3.0-3
A-	3.7.4.1.12.0-1	(U) The Communication and Processing Group shall report its own	CPG-1182	3.3.5.7.0-7
1463		configuration data to the software maintaining the configuration log.		
A-	3.7.4.1.13.0-1	(U) While in an operational mode, the Communication and Processing	CPG-665	3.2.1.14.0-4
6982		Group shall fuse the available operational status information into a system (SuS or FCS) operational status.		
A-	3.7.4.1.14.0-1	(U) The Communication and Processing Group shall support Interactive	CPG-740	3.2.1.16.1.0-

Electronic Technical Manual (IETM), Computer-Based Training (CBT),

and Web-Based Training (WBT).

7020

ID

113366

Object Number

ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 1178	3.7.4.2.0-1	(U) The Communication and Control Station (CCS) of the CPG shall be interchangeable, see 6.2, between Fire Control System and Surveillance System without hardware suite modifications.	CPG-1196		3.3.8.0-1	
A- 1180	3.7.4.2.0-2	(U) The communications payload of the CPG shall be interchangeable between Fire Control System and Surveillance System.	CPG-1197		3.3.8.0-2	
A- 1182	3.7.4.3.0-1	(U) The CPG, excluding GFE, shall accept, process and forward IPv6 packets in order to interface with external systems in accordance with DoD Internet Protocol Version 6 Transition Plan dated March 24, 2005.	CPG-1194		3.3.7.3.0-1	
A-	3.7.4.4.0-1	(U) The CPG (the JLENS C4I subsystem) shall interface to external	CPG-820		3.2.2.2.0-7	
1194		networks without degrading the nominal operation of those networks.	CPG-821		3.2.2.2.0-8	
			CPG-822		3.2.2.2.0-9	
			CPG-826		3.2.2.2.0-13	
			CPG-827		3.2.2.2.0-14	
			CPG-828		3.2.2.2.0-15	
			CPG-831		3.2.2.2.0-18	
			CPG-832		3.2.2.2.0-19	
			CPG-842		3.2.2.3.0-4	
A- 1313	3.7.4.5.1.0-1	(U) The Communication and Control Station (CCS) shall have a signal entrance panel at the shelter exterior to interface electronically and mechanically with tactical, non-tactical and commercial telephone systems.	CPG-875		3.2.3.3.0-9	
A- 1318	3.7.4.5.2.1.0-1	(U) The Communication and Processing Group shall accept, exchange, display and archive mission support computer-assisted electronic text-formatted messages.	CPG-783 CPG-784 CPG-805 CPG-806		3.2.1.18.1.0- 1 3.2.1.18.1.0- 3 3.2.1.18.5.0-	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
					3.2.1.18.5.0-	
A- 1344	3.7.4.6.1.0-1	(U) The Communication and Processing Group, in the appropriate operational mode, shall record all data types listed below while meeting the operational performance requirements specified in 3.7.4 Communication and Processing Group Prime Item. Data types include: a. initialization parameters, b. changed parameters, c. operator actions, d. operator interventions, e. external messages, f. track data (received from the radar), g. status, h. CID-related products (received from the radar), and j. organic weather data.	CPG-700		3.2.1.15.0-1	
A- 1347	3.7.4.6.2.0-1	(U) The Communications and Control Station in the Communication and Processing Group shall provide data recording of other mission data including operator actions, track information, messages from the associated platform, and messages to/from the associated radar for not less than 4 hours.	CPG-716 CPG-717 CPG-727 CPG-2473 CPG-2474 CPG-2681		3.2.1.15.0-4 3.2.1.15.0-6 3.2.1.15.0-11 3.2.1.15.0-5 3.2.1.15.0-7 3.2.1.15.0-2	
A- 5241	3.7.4.6.3.0-1	(U) The Communication and Processing Group, in the appropriate operational mode, shall record voice communications while meeting the operational performance requirements specified in 3.7.4 Communication and Processing Group Prime Item.	CPG-2611		3.2.1.15.0-16	

001022

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App B Section
A- 1383	3.7.4.7.1.0-1	(U) The Communication and Processing Group shall provide an integrated data management environment that supports information discovery, knowledge management, automated archiving, consistency checking and personalized access controls. Information discovery and knowledge management is satisfied by having an organized file structure on operator computer systems that can be searched by automated processes and is augmented by decision aids.	CPG-293 CPG-294 CPG-298 CPG-299 CPG-519 CPG-520 CPG-547 CPG-781 CPG-789 CPG-790 CPG-791 CPG-792 CPG-793 CPG-794 CPG-795 CPG-796 CPG-796 CPG-815 CPG-2651		3.2.1.2.0-4 3.2.1.2.0-5 3.2.1.2.0-6 3.2.1.2.0-7 3.2.1.8.3.0-2 3.2.1.11.0-3 3.2.1.18.3.0-1 3.2.1.18.3.0-2 3.2.1.18.3.0-3 3.2.1.18.3.0-4 3.2.1.18.3.0-6 3.2.1.18.3.0-6 3.2.1.18.3.0-6 3.2.1.18.3.0-6 3.2.1.18.3.0-7 3.2.1.18.3.0-8 3.2.1.18.3.0-8	

		SECRET/NOFORN				
ID	Object Number	Dec. 4, 2009 - JLENS A-Specification (S/NF)	CPG PIDS Object ID	App B Object ID	CPG PIDS Section	App E Section
A- 1388	3,7.4.7.2.0-1	(U) The operator station, which is in the Communication and Processing Group Communications and Control Shelter, shall provide a selectable display that presents at a minimum, initialization information, system status information, and sensor data when the system is in an operational mode.	CPG-542 CPG-577 CPG-815 CPG-2497		3.2.1.11.0-1 3.2.1.11.0-24 3.2.2.1.0-1 3.2.1.11.0-2	
A- 1385	3.7.4.7.2.1.0-1	(U) The Communication and Processing Group shall display tracks to a maximum b(3)	CPG-779		3.2.1.17.0-10	
A- 1387	3.7.4.7.2.2.0-1	(U) The CPG shall display the operational status of the System into which it is assembled.	CPG-657 CPG-658 CPG-665 CPG-696 CPG-697		3.2.1.14.0-2 3.2.1.14.0-3 3.2.1.14.0-4 3.2.1.14.0-10 3.2.1.14.0-11	
A-806	3.7.4.8.1.0-1	(U) The flight director's station shall be located in the Communications and Control Shelter of the CPG.	CPG-851 CPG-852 CPG-853 CPG-876 CPG-878		3.2.2.3.0-7 3.2.2.3.0-8 3.2.2.3.0-9 3.2.3.3.0-10 3.2.3.3.0-12	
A-808	3.7.4.8.2.0-1	(U) Standard weather forecasts, data and observations shall be displayed in the Communications and Control Shelter of the CPG.	CPG-359 CPG-877		3.2.1.3.0-15 3.2.3.3.0-11	

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

PERFORMANCE SPECIFICATION FOR THE

JOINT LAND ATTACK CRUISE MISSILE DEFENSE ELEVATED NETTED SENSOR SYSTEM (JLENS)
Prepared By:

Program Executive Office Missiles and Space

Cruise Missile Defense Systems Project Office, Redstone Arsenal, AL 35898

SUBMITTED BY:	(b)(6)
,	Director, Systems Engineering Development Directorate
REVIEWED BY:	(b)(6)
	Director, Performance Engineering Directorate
	CMDS Project Office
APPROVED FOR U	(b)(6)
	JEENS SDD Technical Monitor, JLENS Product Office CMDS Project Office
	(b)(6)
	Product Manager, JLENS Product Office CMDS Project Office
	(b)(6)
	Project Manager CMDS Project Office

DISTRIBUTION STATEMENT F: Further dissemination only as directed by the U.ENS Product Office, ATTN SFAF-MSLS-CMDS-JEN, P.O. Box 1500, Huntsville, AL 35898. DATE OF DETERMINATION: 24-March 2000.

FXPORT CONTROL ACT WARNING: This document contains technical data whose export is restricted by the Arms Export Control Act (Title 22, U.S.C. SEC 2751, ct. seq.), or the Export Administration Act of 1979, as amended, Title 50, U.S.C., App 2401 et seq. Violations of those export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DoD Directive 5230:25.

(b)(?)(e)	FSC-5841

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

Table of Contents (U)

	Page
Paragraph	<u>Number</u>
1 (U) SCOPE	. 1
1.1 (U) Concept	
1.2 (U) System Description	
1.3 (U) Requirement Markings	
1.4 (U) States and Modes	
1.4.1 (U) Storage State	
1.4.1.1 (U) Short-Term Storage Mode.	
1.4.1.2 (U) Long-Term Storage Mode	
1.4.2 (U) Movement State	
1.4.2.1 (U) Transport Mode	
1.4.2.2 (U) March Order Mode	
1.4.3 (U) Deployment State	
1.4.3.1 (U) Emplace Mode	
1.4.3.2 (U) Displace Mode	
1.4.4 (U) Operations State	
1.4.4.1 (U) Configuration Mode	
1.4.4.2 (U) Tactical Mode	
1.4.4.3 (U) Training Mode	
1.4.4.3.1 (U) Operator/Maintainer Training	
1.4.4.3.2 (U) Crew Training	
1.4.4.3.3 (U) Unit Training	5
1.4.4.3.4 (U) Netted Training	5
1.4.4.4 (U) Operations Sustainment Mode	5
1.4.5 (U) Maintenance State	5
1.4.5.1 (U) Preventive Maintenance Mode	
1.4.5.2 (U) Corrective Maintenance Mode	6
2 (U) APPLICABLE DOCUMENTS	7
3 (U) REQUIREMENTS	9
3.1 (U) Joint Land Attack Cruise Missile Elevated Sensor System (JLENS) Orbit	9
3.1.1 (U) Orbit Composition	9
3.1.2 (U) Orbit Land and Sea Operations	9
3.1.3 (U) Systems Standalone Operations	9
3.2 (U) Missions	
3.2.1 (U) Primary Mission	9
3.2.2 (U) Secondary Missions	
3.2.3 (U) Impact Point Predictions	
3.3 (U) Threat	9
3.3.1 (U) ABT Threat Engagements	9
3.3.2 (U) Threat Surveillance and Tracking	
3.4 (U) Operating Environment	10

3.4.1 (U) Electronic Countermeasures (ECM)	10
3.4.1.1 (b)(3)	10
3.4.1.2 (b)(3)	10
3.4.1.3 (b)(3)	10
3.4.2 (b)(3)	
3.4.3 (U) Clutter and Multipath	10
3.4.4 (U) Natural Environments	10
3.4.4.1 (U) Temperature	11
3.4.4.1.1 (U) Other than Storage and Transport	11
3.4.4.1.2 (U) Storage and Transport	11
3.4.4.2 (U) Relative Humidity	11
3.4.4.3 (U) Rain	11
3.4.4.3.1 (U) Blowing Rain	11
3.4.4.3.1.1 (U) Other than Storage and Transport	11
3.4.4.3.1.2 (U) Storage and Transport	11
3.4.4.3.2 (U) Dripping Rain	11
3.4.4.3.2.1 (U) Other than Storage and Transport	11
3.4.4.3.2.2 (U) Storage and Transport	
3.4.4.4 (U) Hail	11
3.4.4.4.1 (U) Other than Storage and Transport	11
3.4.4.4.2 (U) Storage and Transport	12
3.4.4.5 (U) Snow	
3.4.4.5.1 (U) Other than Storage and Transport	
3.4.4.5.2 (U) Storage and Transport	
3.4.4.6 (U) Salt Atmosphere	
3.4.4.7 (U) Sand and Dust	
3.4.4.7.1 (U) Other than Storage and Transport	
3.4.4.7.2 (U) Storage and Transport	
3.4.4.8 (U) Fungus	
3.4.4.9 (U) Wind	
3.4.4.9.1 (U) Other than Storage and Transport	
3.4.4.9.1.1 (U) Survival Wind	
3.4.4.9.2 (U) Storage and Transport	
3.4.4.9.3 (U) Wind Turbulence	
3.4.4.10 (U) Lightning	
3.4.4.10.1 (U) Other than Airborne Equipment	
3.4.4.10.2 (U) Airborne Equipment	
3.4.4.10.3 (U) Status Recovery	
3.4.4.10.4 (U) Lightning EMP	
3.4.5 (U) Induced Environments	
3.4,5.1 (U) Vibration	
3.4.5.1.1 (U) Other than Storage and Transport	
3.4.5.1.2 (U) Storage and Transport.	
3.4.5.2 (U) Nuclear, Biological, and Chemical	
3.4.5.2.1 (U) Decontamination	14

3.4.5.2.1.1 (b)(3)	14
3.4.5.2.1.2 (U) Effectiveness	14
3.4.5.2.2 (U) Exposure	
3.4.5.2.3 (U) Personnel Protection	
3.4.5.3 (U) Electrostatic Discharge (ESD)	
3.4.5.3.1 (U) LRU ESD	
3.4.5.4 (U) Electromagnetic Environmental Effects (E3)	
3.4.5.4.1 (U) Electromagnetic Interference (EMI)	
3.4.5.4.2 (U) Electromagnetic Compatibility (EMC)	
3.4.5.5 (U) Grounding and Bonding	
3.4.5.6 (U) Ordnance	
3.4.5.6.1 (U) Safe Rendering	
3.4.5.6.2 (U) Inadvertent Ignition	15
3.4.5.7 (b)(3)	15
3.5 (U) Standardization and Commonality	
3.5.1 (U) Vehicles, Shelters, and Trailers	
3.5.2 (U) Lifting and Handling Equipment	
3.6 (U) Interoperability	
3.6.1 (U) Global Positioning System (GPS)	
3.6.2 (U) Internet Protocol	
3.6.3 (U) External BM/C4I Interface	
3.6.4 (U) C4ISR Architectures	
3.6.5 (U) Secondary Data Dissemination	
3.6.6 (U) Network Degradation	16
3.6.7 (U) Communication and Data Interfaces Implementation	16
3.6.8 (U) Extensible Markup Language (XML) Interface	
3.6.9 (U) Tactical Data Information Link J (TADIL J)/Link 16	
3.6.9.1 (U) Link 16 Participants	
3.6.9.2 (U) Joint Range Extension Application Protocol Participants	
3.6.9.3 (U) Aerial Data Type	
3.6.9.4 (U) SMT Data Type	
3.6.9.5 (U) Receive Data Type	
3.6.9.6 (U) Aerial Engagement Support Data	
3.6.9.7 (U) Receive Fire Control Support Engagement Information	
3.6.9.8 (U) Provide Fire Control Support Engagement Information	
3.6.9.9 (U) Provide CID Support Data	
3.6.9.10 (U) Provide Operational Status and Change Information	
3.6.10 (U) Cooperative Engagement Capability (CEC)	
3.6.10.1 (U) CEC Participation	
3.6.10.2 (U) Provide Aerial Data Type	
3.6.10.3 (U) Receive Aerial Data Type	
3.6.10.4 (U) Aerial Engagement Support Data	
3.6.10.5	
3.6.10.6 (U) Provide Operational Status and Change Information	
3.6.11 (U) Integrated Broadcast Service (IBS)	18

3.6.11.1 (U) Provide Aerial Data Type	18
3.6.11.2 (U) Provide SMT Data Type	
3.6.11.3 (U) Receive Aerial Data Type	
3.6.11.4 (U) Receive SMT Data Type	
3.6.11.5 (U) Receive Fire Control Support Engagement Information	
3.6.11.6 (U) Provide Fire Control Support Engagement Information	18
3.6.11.7 (U) Provide TBM and LCR LPE	
3.6.12 (U) Army Battle Command System (ABCS)	
3.6.12.1 (U) Provide SMT Data Type	
3.6.12.2 (U) Provide Operational Status and Change Information	
3.6.12.3 (U) Provide Aerial Data Type	
3.7 (U) Identification Friend or Foe	19
3.7.1 (U) IFF Range	
3.7.2 (U) IFF Interrogator Modes	
3.7.3 (U) IFF Transponder Modes	
3.8 (U) GPS Compliance	
3.9 (U) Precise Participant Location and Identification (PPLI)	
3.10 (b)(3)	
3.11 (U) Movement	
3.11.1 (U) Rail Transportation	
3.11.1.1 (U) Rail Transportation Tunnel	
3.11.1.2 (U) Rail Transport Vibration.	
3.11.2 (U) Land Transportation	
3.11.2.1 (U) Highway Transportation	
3.11.2.2 (U) Secondary Road Transportation	
3.11.2.3 (U) Unimproved Road Transportation	
3.11.2.4 (U) Off-road Transportation	
3.11.2.5 (U) Large Assembly Transport Vibration	
3.11.3 (U) Sea Transportation	
3.11.3.1 (U) Sea Transportation Vibration.	
3.11.4 (U) Air Transportation	
3.11.4.1 (U) Air Transport Vibration	21
3.11.5 (U) Transportation Packaging	
3.11.6 (U) Transportation Performance-oriented Packaging	
3.11.7 (U) Shock	
3.11.7.1 (U) Functional Shock	
3.11.7.2 (U) Rail Shock	
3.11.7.3 (U) Packaged LRU Drop	
3.11.7.4 (U) Transit Drop	
3.11.7.4.1 (U) Transit Edge Drop	
3.11.7.4.2 (U) Transit Flat Drop	
3.11.7.4.3 (U) Transit Flat Drop for Fragile Hardware	
3.11.7.4.3.1 (U) Transit Shock Indicators for Fragile Hardware	
3.11.7.4.3.2 (U) Container Handling for Fragile Hardware	
3.11.7.4.3.3 (U) Fixture Handling for Fragile Hardware	22

3.11.7.5 (U) Transport and Handling Vehicles	
3.11.8 (U) March Order and Emplacement	
3.11.8.1 (U) Emplacement Time	
3.11.8.2 (U) March Order Time	
3.11.9 (U) Location, Position, and Alignment	23
3.11.9.1 (U) Inertial Navigation System	23
3.11.9.2 (U) GPS (b)(3)	23
3.12 (U) Reliability, Availability, and Maintainability	
3.12.1 (b)(3)	23
3.12.2 (b)(3)	23
(2)(2)	23
	24
3.13 (U) Fault Detection and Isolation	
3.13.1 (U) Monitoring	
3.13.2 (U) Status Reporting to the Operator	
3.13.3 (U) Fault Storage	
3.13.4 (U) Failure Detection and Isolation	
3.13.5 (U) BIT/BITE Operational Impact	
3.13.6 (U) Fault Detection and Isolation	
3.13.7 (U) BIT/BITE False Alarm Rate	
3.13.8 (U) Prognostic Incorporation	
3.13.9 (U) Prognostic Performance	
3.13.10 (U) Prognostic Data	
3.13.11 (U) BIT/BITE Circuitry Isolation	
3.13.12 (U) Failure Degradation	
3.14 (U) Logistics	
3.14.1 (U) Standard Test Equipment	
3.14.2 (U) Non-standard Test Equipment	
3.14.3 (U) Supply	
3.14.4 (U) Maintenance Concept	
3.14.5 (U) Preventive Maintenance Checks and Services (PMCS)	
3.14.5.1 (U) Scheduled System Maintenance	
3.14.5.2 (U) Aerostat Retrieval Cycle	
3.14.6 (U) Supply Support Concept	
3.14.7 (U) Helium Quantity	
3.14.8 (U) Unique Identification	
3.15 (U) Safety	
3.15.1 (U) Mishap Risk Values	
3.15.2 (U) Noise	
3.16 (U) Survivability	
3.16.1 (b)(3)	26
3.16.3 (U) Distinctive Characteristics	
3.17 (U) Computer Hardware / Software	
3.17.1 (U) Uninterruptible Power Source (UPS)	

3.17.2 (U) Data Processing Reserve Capacity	26
3.17.3 (U) Signal Processing Reserve Capacity	
3.17.4 (U) Removable Storage Media	27
3.17.5 (b)(3)	27
3.18 (U) Power	27
3.18.1 (U) U.S. Prime Power	. 27
3.18.2 (U) Alternate Power	. 27
3.18.3 (U) Automatic Power Switching	. 27
3.18.4 (U) Manual Power Switching	27
3.18.5 (U) Foreign Prime Power	27
3.19 (U) Other Modes	27
3.20 (U) Modularity	27
3.21 (U) Information Assurance	28
3.21.1 (U) Classified and Unclassified Information	28
3.21.2 (U) Process Approval	28
3.21.3 (b)(3)	28
3.22 (U) Human Engineering	28
3.22.1 (U) Anthropometrics	28
3.22.2 (U) Environmental Control Systems	. 28
3.22.3 (U) Human-To-Machine Interfaces	28
3.22. <u>4 (U)</u> Symbology	28
3.22.4 (U) Symbology	29
3.23.1 (U) EO/IR Surveillance Range	29
3.23.2 (U) EO/IR Azimuth Coverage	29
3.23.3 (U) EO/IR System Control	
3.24 (U) Platform	
3.24.1 (U) Interchangeability	29
3.24.2 (b)(3) 3.24.3 (U) Visual Flight Rules	29
3.24.4 (U) Instrumented Flight Rules	
3.24.5 (U) Tether	
3.25 (U) Air Vehicle	29
3.25.1 (b)(3)	30
3.25.2 (U) Strobe Light	
3.26 (U) Ground Support Equipment (GSE)	
3.26.1 (U) Meteorological Monitoring	
3.26.1.1 (U) Meteorological Monitoring Range	
3.26.1.2 (U) Weather Display	
3.26.2 (U) Flight Directors Station	
3.27 (U) Fire Control System	30
3.27.1 (U) USMCEB Certification	30
3.27.2 (U) Operational Bandwidth	
3.27.3 (U) Fire Control System ABT Loading.	
3.27.3.1 (b)(3) 3.27.3.2 (U) Stressing Target Loading Scenario	30
3.27.3.2 (U) Stressing Target Loading Scenario	31

3.27.3	.3 (U) Surveillance Target Loading	31
3.27.3	.4 (b)(3)	31
3.27.3	.4.1 (b)(3)	31
3.27.3		
3.27.4	(U) Fire Control Radar Operational Functions	31
	.1 (U) Interleaving	
	.2 (U) Air Breathing Target Function	
	.2.1 (U) Function Priorities	
3.27.4		
3.27.4		
3.27.4		
	(U) Fire Control Cues.	
3.27.6		
3.27.6		
	(2) Cued SLAMRAAM Engagement Range	
3.27.6 3.27.7		
3.27.7		3 3
	.1 (b)(3)	ננ ננ
3.27.7		
	(U) Instrumented Range	
	(U) ABT Target Tracking	
	1.1 (U) ABT Target Discrimination	
	0 (U) Transition to Track	
3.27.1		34
	2 (U) SLAMRAAM Accuracy	34
	3 (b)(3)	35
3.27.1		35
3.27.1	4,1 (U) Update Rate	35
3.27.1	4.2 (U) Range and Azimuth Accuracy	35
3.27.1	4.3 (U) Relative Position Accuracy	35
3.27.1	4.4 (U) Target Altitude Accuracy	35
	5 (U) Sectored Surveillance	
3.27.1	5.1 (U) Sectored Surveillance Azimuth Coverage	35
	5.2 (U) Instrumented Range	
3.27.1	5.3 (U) Sectored Surveillance Range	36
3.27.1	5.3.1 (b)(3) 5.3.2 (b)(1) 5.4 (U) Track Initiation	36
3.27.1	5.3.2 (b)(1)	36
3.27.1	5.4 (U) Track Initiation	36
	5.5 (U) ABT False Tracks	
	6 (U) SMT Function	
	6.1 (U) SMT Surveillance Azimuth Coverage	
	6.2 (U) SMT Target Loading	
	6.3 (U) SMT Target Location Error	
3.27.1	6.4 (U) SMT Track Initiation	36

2.27 17 5 (II) OMT North of ACT for Torolog	2/
3.27.16.5 (U) SMT Number of False Tracks	
3.27.16.6 (U) SMT Detection Range	
3.27.16.7 (U) SMT Target Discrimination	
3.27.17 (U) TBM Function	
3.27.17.1 (U) TBM Surveillance Azimuth Coverage	
3.27.17.2 (U) Elevation Coverage.	
3.27.17.3 (U) Launch Point Estimate	
3.27.18 (U) LCR Function	
3.27.18.1 (U) LCR Surveillance Azimuth Coverage	
3.27.18.2 (U) Elevation Coverage	
3.27.18.3 (U) Launch Point Estimate	20
3.27.22 (U) Range Resolution	
3.27.23 (U) Discrimination	
3.27.24 (U) CID Technique 1	
3.27.26 (U) CID Technique 3	
3.27.28 (b)(3)	
3.27.29 (b)(3)	
3.28 (U) Processing Station.	
3.28.1 (U) Interchangeability	
3.28.2 (U) Operator Station(s)	
3.28.2.1 (U) System Initialization	
3.28.2.2 (U) Automation	
3.28.2.3 (U) Location Systems.	
3.28.2.4 (U) Terrain Analysis	
3.28.2.5 (U) Mission Control	
3.28.2.6 (U) Tasking Responses	
3.28.2.7 (U) Operator Actions	
3.28.2.8 (U) Target Designation.	
3.28.2.9 (U) Integrated Data Management Environment	
3.28.3 (U) Embedded Training	
3.28.3.1 (U) Simulated Conditions	
3.28.3.2 (U) Individual Training	
3.28.3.3 (U) Team Training	
3.28.3.4 (U) Unit Training	
3.28.3.5 (U) Web-based Training	
3.28.3.6 (U) Growth	41
3.28.3.6 (U) Growth	41 41
3.28.3.6 (U) Growth	41 41

3.29 (U) Communications	
3.29.1 (U) Interface Panel	
3.29.2 (U) Message Format	41
3.29.3 (U) Text Formatted Messages	
3.29.4 (U) Air and Missile Defense Planning and Control Station	
3.29.5 (U) Voice Communications	42
3.29.6 (U) Combat Net Radio	42
3.29.7 (U) Tactical Voice Communications	
3.29.8 (U) Commercial Voice Communications	42
3.29.9 (U) Defense Switched Network	
3.29.10 (U) Integrated Services Digital Network	42
3.29.11 (U) Air and Missile Defense Workstation.	42
3.30 (U) Data Recording	
3.30.1 (U) Data Recording Impacts	
3.30.2 (U) Data Recording Control	42
3.30.3 (U) Data Storage Devices	
3.30.4 (U) Media Changeover	
3.30.5 (U) Selective Data Retrieval	
3.30.6 (U) Interactive Operator Interface	
3.30.7 (U) Data Recording Duration	
3.30.7.1 (b)(3)	43
3.30.7.2 (U) Mission Data Recording Duration	
3.30.7.3 (U) Voice Recording Duration	
3.30.7.4 (U) Video Recording Duration.	
3.30.7.5 (U) Weather Data Recording Duration	
3.30.7.6 (U) Video Data Playback	
3.30.7.7 (U) Voice Playback	
3.31 (U) Surveillance System	
3.31.1 (U) Air Breathing Target (ABT) Function	
3.31.2 (U) Azimuth Coverage	
3.31.3 (U) Elevation Coverage	
3.31.4 (U) Field of Regard	
3.31.5 (U) Cueing Range	
3.31.6 (U) Surveillance System Target Track Loading	
3.31.6.1 (U) Stressing Target Load	
3.31.6.2 (U) Saturation Alleviation	
3.31.7 (U) Stressing Target Cue	
3.31.8 (U) Instrumented Range	
3.31.9 (U) Track Initiation	
3.31.10 (U) Air Breathing Target Detection Range	
3.31.11 (U) False Tracks	
3.31.12 (U) Emission Controls	
3.31.12.1 (U) Sector Blanking Control	
3.31.12.2 (U) ERP Control	
3.31.13 (U) Combat ID Support	45

3.31.13.1 (U) Surface/Air Declaration	45
3.31.13.2 (U) Surface/Air Declaration Accuracy	45
3.31.14 (U) TBM Function	45
3.31.14.1 (U) Surveillance Coverage	46
3.31.14.2 (U) Elevation Coverage	46
3.31.14.3 (U) Launch Point Estimate	46
3.31.15 (U) LCR Function	
3.31.15.1 (U) Surveillance Coverage	
3.31.15.2 (U) Elevation Coverage	46
3.31.15.3 (U) Launch Point Estimate	
3.31.16 (U) SMT Function	
3.31.16.1 (U) Target Load	
3.31.16.2 (U) Detection Range	
3.31.16.3 (U) Track Initiation	
3.31.16.4 (U) False Tracks	
3.31.17 (U) USMCEB Certification	
3.31.18 (U) Clutter Tracks	
4 (U) Verification	
4.1 (U) General Test and Evaluation Provisions	
4.2 (U) Requirements Verification	
4.3 (U) Verification Methods	
4.3.1 (U) Demonstration (D)	
4.3.2 (U) Test (T)	
4.3.3 (U) Analysis (A)	
4.3.4 (U) Inspection (I)	
4.4 (U) Classes of Verifications:	
4.4.1 (U) Type D, Design	
4.4.2 (U) Type S, System	
4.4.3 (U) Type L, Subsystem	
4.4.4 (U) Type O, Orbit	
5 (U) Packaging	61
6 (U) Notes	62
6.1 (Ú) Intended Use	
6.2 (U) Glossary Definitions	
6.3 (U) Acronyms	77

APPENDICES

A.0 (U) Threat Characterstics	A-1
A.1 (U) ABT Target Characteristi	ics
A.2 (U) SMT Target Characterist	icsA-1
A.3 (U) TBM/LCR Target Charac	eteristics
B.1 (b)(3)	B-1
B.2 (b)(3)	B-2
B.3 (b)(3)	B-3
C.1 (U) Land Clutter	
C.1.1 (b)(3)	C-1
C.1.1.1 (b)(3)	
	cattering
C.1.1.3 (U) Velocity Distribution	C-3
C.2.1 (b)(3)	C-3
C.2.1.1 (b)(3)	
C.2.1.1.1 (U) Wide Area Mean So	cattering
C.2.1.1.2 (U) Statistical Variation	<u>a</u>
C.2.1.2 (b)(3)	
C.2.1.3 (U) Velocity Distribution	
C.3 (U) Rain Clutter	
C.3.1 (U) Spatial Extent and Dist	ribution of Rain
C.3.2 (b)(3)	
C.3.3 (U) Velocity Distribution	
C.3.4 (b)(3)	
C.4 (U) Biological Clutter	. <u></u>
C.4.1 (b)(3)	
C.5 (b)(3)	
C.6 (b)(3)	
	D-1
	D-1
	<u>s</u> D-1
D.4.3 (b)(3)	D-2
D.4.4 (U) Missile and Target Trace	cking
	D-4
	D-5
	verD-7
D.4.8 (U) Terminal Receiver / Signature /	gnal Processor

D.4.9 (U) Gridlock	D-12
D.4.10 (U) Time Delays	
Operational Mode Summary/Mission Profile (OMS	S/MP) E-1
Table of Fig	ures (U)
Figure 1.3-1. (U) JLENS System Specification Tre	ee2
	B-1
	B-2
	B-3
Figure D.4.2-1. (U) Notional CEC Interfaces [O]	
Figure D.4.6-1. (U) Current CWI FM Noise Specif	ication [O]D-6
Figure D.4.8-1.	
	D-10
Figure D.4.8-2. (b)(3)	D-11
List of Tab	
Table B.1-1. (b)(3)	B-2
	B-3
Table C.1.1.1.2-1. Slope Parameter of Compound I Table C.3.2-1. Example of Reflectivity Values for	
Table C.3.4-1. Rain Attenuation Coefficients (U)	
Table C.4.1-1. (b)(3)	
Table C.5-1. Electromagnetic Properties of Sea Wa	eter (U)
Table C.5-2. Electromagnetic Properties of Soil (U	
Table D.4.3-1. (b)(3)	D-3
Table D.4.4-1. (U) Track Filter Coefficients [O]	D-4
Table D.4.5-1. (b)(3)	D-5
Table D.4.6-1. (b)(3	
Table D.4.6-2. (U) JLENS Illuminator Requirement	its(Transmitter) [O]D-7
Table D.4.7-1. (b)(3	D-8
Table D.4.7-2. (b)(3	
Table D.4.7-3. (U) Error Budget For Seeker Pointing	
Table D.4.8-1. (b)(3	
Table D.4.10-1. (U) Data Transfer Time Delays [O]D-13

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

JLENS Performance Specification (U)

1 (U) SCOPE

(U) The JLENS Performance Specification defines the performance requirements and operating environment for a JLENS system employing technologies with specific attention given to Land Attack Cruise Missile Defense (LACMD). The system (a) enables Surface-to-Air Missile (SAM) systems to perform over-the-horizon (OTH) intercepts of Land Attack Cruise Missiles (LACM) under the Air Directed Surface-to-Air Missile (ADSAM) concept, (b) contributes to Single Integrated Air Picture (SIAP), (c) provides target data on surface moving targets (SMT), and (d) detects and tracks Theater Ballistic Missiles (TBM) and Large Caliber Rockets (LCR). The scope of operations ranges from single Service applications to a full Joint environment in all phases of warfare.

1.1 (U) Concept

(U) One complete JLENS Orbit consists of an elevated Surveillance System and an elevated Fire Control System. The Surveillance System detects hostile targets and cues the Fire Control System to support weapon systems in the engagement of these hostile targets. The elevated Fire Control System enables air defense weapons to engage low-flying cruise missiles at extended ranges and minimizes the likelihood of these threats completing their mission. When tasked, the Fire Control System can perform other missions in support of the warfighter. Either system can be employed as a stand-alone sensor. The Fire Control System engagement performance will be reduced when operating autonomously.

1.2 (U) System Description

(U) Each Fire Control System and Surveillance System includes a platform, payload(s), processing station, and ancillary equipment. The platform is a non-rigid, aerodynamically shaped, helium and air filled air vehicle that is tethered to a mooring (ground or sea-based) station. The tether is a cable that secures the air vehicle, controls the operating altitude, provides power to airborne components and performs bi-directional data communication. The payloads are a multi-functional fire control sensor for performing sector surveillance and supporting intercepts, and a surveillance sensor performing wide area surveillance and supporting fire control sensor cueing and the necessary communications equipment for each sensor system. The processing station includes operator station(s) and communications equipment. Figure 1.3-1 depicts a notional specification tree. The term "Systems" refers to both the Fire Control System and the Surveillance System.

1.3 (U) Requirement Markings

(U) All requirements must be met unless marked objective [O]. Requirements marked with [O] represent desired performance. When used following a parameter or before the period of a sentence, the designation applies only to that parameter or sentence, respectively.

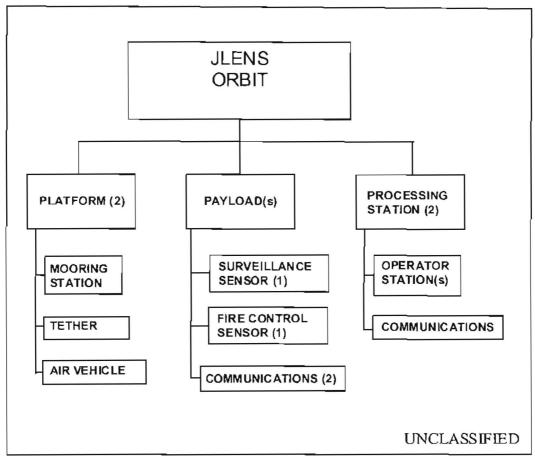


Figure 1.3-1. (U) JLENS System Specification Tree

1.4 (U) States and Modes

(U) The JLENS System provides operational capabilities to support both wartime and peacetime missions through the use of the system states and modes. The JLENS System may transition between these states and their modes as a system or as individual elements of the system.

1.4.1 (U) Storage State

(U) The Storage State ensures the availability of the system after long or short periods of storage. It consists of the short-term and long-term storage modes. The JLENS Systems normally transition into and out of the storage state from/to the movement state. This state is a non-operational state.

1.4.1.1 (U) Short-Term Storage Mode


(U) The system equipment is placed in short-term storage mode with the owning organization when mission requirements require the unit to perform functions other than their normal missions.

(b)(3)

The equipment is placed in short-term storage without pre-conditioning and is maintained at a reduced maintenance level. Normal preventive maintenance checks and services (PMCS) actions are to be performed while in short-term storage.

(b)(3)

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009



1.4.1.2 (U) Long-Term Storage Mode

(U) The JLENS system equipment is placed in long-term storage mode when mission requirements do not require the equipment for both peacetime and wartime operations. The equipment may remain stored through the duration of its service life. The system equipment is prepared and pre-conditioned for transition into long-term storage in accordance with the appropriate technical manuals. All sensitive and pilferable items, as well as any item that may deteriorate and/or corrode, are to be removable.

(b)(3)

PMCS is limited to periodic visual inspection of the material condition of the equipment. The equipment is returned to operations in accordance with the appropriate technical manuals. This mode is a non-operational mode.

1.4.2 (U) Movement State

(U) The movement state consists of the transport mode for intra-theater and inter-theater shipment of the JLENS System using non-organic means. The march-order mode for movement in-theater is by organic means. This state is a non-operational state.

1.4.2.1 (U) Transport Mode

(U) In the transport mode, the equipment is placed into an air, ground, rail, or water transport configuration. All JLENS equipment is transportable by C-17 and C-5 fixed-wing military aircraft for strategic airlift, sealift, and/or rail. The JLENS system is transportable by C-130 intra-theater with the exception of the Mobile Mooring Station and other specified ground support equipment as approved by the government. Transitions to the transport mode are conducted using organic equipment or the transportation unit's special handling equipment. It remains in the transport configuration until it arrives at its final destination or is prepared for road march. This mode is a non-operational mode.

1.4.2.2 (U) March Order Mode

(U) The JLENS system transitions to the march-order mode when required to move by organic means. A JLENS unit is mobile with sufficient vehicles, personnel, supplies, and both system peculiar and common equipment to displace the entire unit in one move. JLENS must be capable of movement on primary and secondary roads, as well as movement off-road. It must be capable of limited off-road movement to reach pre-selected emplacement sites over cross-country terrain and unimproved roads. The system is capable of relocating on public roads and highways, including those having unimproved road surfaces (such as gravel or hard-packed dirt), to support emplacement at prepared sites. This mode is a non-operational mode.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

1.4.3 (U) Deployment State

(U) Deployment state consists of two modes: the emplace mode and the displace mode.

1.4.3.1 (U) Emplace Mode

(U) The emplace mode includes the physical positioning, aerostat inflation, and physical integration of the system. The system equipment transitions to the emplace mode upon arrival at its designated location. After physical positioning and integration, the system can begin initialization of individual prime items. Initialization is the power-up sequence for the individual prime items that ends with the system ready to begin configuration mode for an assigned mission. This mode is a non-operational mode.

1.4.3.2 (U) Displace Mode

(U) The displace mode provides the capabilities to transition system equipment to march order configurations prior to entering the movement state. The assigned crews shut down, disassemble, and stow all deployed equipment in preparation for movement. This mode is a non-operational mode.

1.4.4 (U) Operations State

(U) The operations state begins with the system being configured for a mission and continues through all tactical or training operations. The operations state also includes maintenance and sustainment activities. This state is an operational state.

1.4.4.1 (U) Configuration Mode

(U) The configuration mode provides the ability for the operators to build and implement a mission profile. The mission profile contains the performance parameters and force operations (FO) data for the radar and communications systems to meet the tasks in the assigned mission. Operator system interfaces are provided for monitoring external stimuli. Voice and data communications, both external and internal to the system, are provided to receive commands, provide status, and exchange data. The configuration mode can be entered as many times as is necessary during operations to change the performance parameters due to mission assignment change. This mode is an operational mode.

1.4.4.2 (U) Tactical Mode

(U) The Tactical Mode provides the capability to perform all assigned mission operations to include: surveillance, detection, tracking and discrimination, and threat evaluation. The system operates in the tactical mode subsequent to the configuration mode. In this mode, the radar may or may not be radiating, depending on operational requirements. The JLENS System (Surveillance or Fire Control) can only be in the tactical state during operational environmental conditions. This mode is an operational mode.

1.4.4.3 (U) Training Mode

(U) The training mode provides the capabilities to perform operator training at a number of levels including operator/maintainer, crew, unit and netted in both live and simulated operations simultaneously. The training mode allows the operators to maintain their proficiency in tactical

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

decision making, console operations, and maintenance functions. The system operates in the training mode subsequent with the configuration mode and provides for a fast transition to the tactical mode. The four levels of training are Operator/Maintainer Training, Crew Training, Unit Training, and Netted Training. This mode is an operational mode.

1.4.4.3.1 (U) Operator/Maintainer Training

(U) Operator/Maintainer training for the soldier provides hands-on practice in the use of the hardware, software applications, and fault detection and isolation for individual pieces of equipment. Operator task training reinforces skills taught in training institutions, sustains skill previously learned, and is an invaluable tool to teach advanced skills. This mode is an operational mode.

1.4.4.3.2 (U) Crew Training

(U) Crew training is a progressive set of individual tasks that integrate the actions of the various system crews. It provides for conduct of crew battle drills for system/prime item emplacement, initialization, and integration. Crew training provides for training on system tactics, techniques, and procedures. This mode is an operational mode.

1.4.4.3.3 (U) Unit Training

(U) Unit training is progressive set of individual and crew battle drills that link the prime items together during system integration and culminates with simulated engagement and force operations. Unit training is performed using tactical software and hardware communications means. This mode is an operational mode.

1.4.4.3.4 (U) Netted Training

(U) During netted training, the JLENS system participates in a common training scenario, coordinated in near real-time, with other JLENS batteries and/or battalion, lower-tier air defense units, higher-echelon headquarters, and other combined arms and joint exercise participants. The JLENS battery participates in netted training exercises through interface with distributed interactive compliant simulations. This mode is an operational mode.

1.4.4.4 (U) Operations Sustainment Mode

(U) The operations sustainment mode functions allow the system to sustain continuous operations for extended periods of time. It includes refueling, retraining, and resupplying operations. This mode can be concurrent with the other modes in the Operations State. This mode is an operational mode.

1.4.5 (U) Maintenance State

(U) The Maintenance state consists of preventive maintenance and corrective maintenance modes. While in this state, system equipment is maintained to ensure its operational readiness or return failed equipment to a mission capable status. This state is an operational or a non-operational state dependent on mode.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

1.4.5.1 (U) Preventive Maintenance Mode

(U) The preventive maintenance mode allows the JLENS crew to perform scheduled PMCS designed to extend and ensure the operational readiness of the system. Preventive maintenance tasks may be conducted on individual prime items on a non-interference basis with system operation as long as safety policies and procedures allow. Transition to and from the preventive maintenance mode can occur from the storage, transportation, or operation states. This can be either an operational or non-operational mode.

1.4.5.2 (U) Corrective Maintenance Mode

(U) The corrective maintenance mode is for repair of system failures resulting in unscheduled maintenance actions. Repair is defined as the restoration or replacement of parts to return the end items to an operational condition and maintain efficient operations. This mode is a non-operational mode.

2 (U) APPLICABLE DOCUMENTS

- (U) The following documents are to be used for further clarification. Should there be a conflict between this specification and any of the following documents, this specification takes precedence.
 - (U) United States Army Objective Force Operational and Organization Concept for Air and Missile Defense, Director of Combat Developments, US Army Air Defense Artillery School, Fort Bliss Texas, 15 February 2002, UNCLASSIFIED.

(b)(3)

- (U) Environmental Models for the Aerostat Program, JHU/APL A1A-97U-041, 16 June 1997, J. P. Reilly, R. L. McDonald, G. D. Dockery, and J. Stapleton (NSWC/DD), UNCLASSIFIED.
- (b)(3)
- (U) DoD International AIMS Program Performance Standard, 18 March 1998, UNCLASSIFIED

(b)(3)

- (U) MIL-STD 464, Department of Defense Interface Standard for Electromagnetic Environmental Effects Requirements for Systems.
- (U) MIL-STD-1472, Department of Defense Design Criteria Standard, Human Engineering.
- (U) MIL-E-6051, Military Specification, Electromagnetic Compatibility Requirements, Systems, 7September 1967.
- (U) MIL-STD-461, Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility.
- (U) MIL-B-5087, Military Specification, Bonding, Electrical, and Lightning Protection for Aerospace Systems.
- (U) MIL-STD-1310, Department of Defense Standard Practice for Shipboard Bonding, Grounding, and other Techniques for Electromagnetic Compatibility and Safety.
- (U) MIL-STD 6016, Department of Defense Interface Standard for Tactical Digital Information Link (TADIL) J Message Standard.
- (U) MIL-STD 3011, Interoperability Standard for the Joint Range Extension Application Protocol (JREAP).
- (U) JLENS Information Support Plan (ISP), Stage II DRAFT.
- (U) DoD Internet Protocol Version 6 Transition Plan.
- (U) MIL-STD-1366, Definition of Materiel Transportation System Dimensional and Weight Constraints.
- (U) MIL-STD-130, Department of Defense Standard Practice, Identification Marking of U.S. Military Property.

- (U) MIL-STD-882, Department of Defense Standard Practice for System Safety.
- (U) MIL-HDBK-454, Department of Defense Handbook, General Guidelines for Electronic Equipment.
- (U) MIL-STD-1474, Department of Defense Design Criteria Standard, Noise Limits.
- (U) MIL-HDBK-1472(454), Department of Defense Handbook, Human Engineering Program Process and Procedures.
- (U) MIL-STD-2169, Department of Defense Standard for High-Altitude Electromagnetic Pulse (HEMP) Environment.
- (U) MIL-STD-1385, Department of Defense Standard for General Requirements for Preclusion of Ordnance Hazards in Electromagnetic Fields.
- MIL-STD 2525, Common Warfighting Symbology, 30 Jan 1999
- (U) MIL-STD-469, Department of Defense Interface Standard for Radar Engineering Interface Requirements Electromagnetic Compatibility
- (U) MIL-STD-129, Department of Defense Standard Practice for Military Marking For Shipment And Storage

3 (U) REQUIREMENTS

(U) Additional requirements are identified in Annex A of this document.

3.1 (U) Joint Land Attack Cruise Missile Elevated Sensor System (JLENS) Orbit

3.1.1 (U) Orbit Composition

(U) The JLENS Orbit is defined to consist of a Fire Control System and Surveillance System.

3.1.2 (U) Orbit Land and Sea Operations

(U) The Systems shall be designed for land-based and sea-based operations.

3.1.3 (U) Systems Standalone Operations

(U) Both the Fire Control System and the Surveillance system shall be operable as a stand-alone sensor system.

3.2 (U) Missions

3.2.1 (U) Primary Mission

(U) The JLENS Orbit shall detect, track and support engagement of Land Attack Cruise Missiles (LACM) and other airborne threats.

3.2.2 (U) Secondary Missions

(U) Within the constraints of the primary mission, the JLENS Orbit shall provide detection, track data, and launch point estimates of Theater Ballistic Missiles (TBM) and Large Caliber Rockets (LCR) and to provide surveillance, detection, and tracking of Surface Moving Targets (SMT).

3.2.3 (U) Impact Point Predictions

(U) The JLENS Fire Control System shall provide impact point predictions for TBM and LCR tracks. [O]

3.3 (U) Threat

3.3.1 (U) ABT Threat Engagements

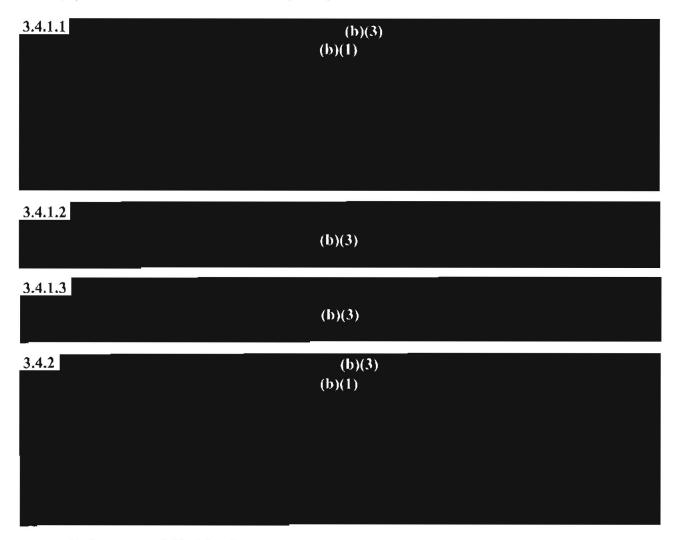
(b)(3)

3.3.2 (U) Threat Surveillance and Tracking

(U) The JLENS Orbit shall support surveillance and tracking of the ABT, surface moving threats, tactical ballistic missiles and large caliber rockets as defined in Appendix A with no a priori knowledge of the threat.

3.4 (U) Operating Environment

3.4.1 (U) Electronic Countermeasures (ECM)



3.4.3 (U) Clutter and Multipath

(U) The system requirements shall be met in the Clutter and Multipath environments defined in Appendix C.

3.4.4 (U) Natural Environments

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.4.4.1 (U) Temperature

3.4.4.1.1 (U) Other than Storage and Transport

(U) The Systems shall meet performance requirements during exposure to an ambient temperature range from -40°C to +49°C (Mean Sea Level).

3.4.4.1.2 (U) Storage and Transport

(U) The Systems or Components shall meet all performance requirements following exposure to an ambient temperature range from -46°C to 71°C while in the storage or movement state.

3.4.4.2 (U) Relative Humidity

(U) The Systems shall meet all performance requirements during exposure to a relative humidity range from 3% to 100% non-condensing using MIL-STD 810F as guidance.

3.4.4.3 (U) Rain

3.4.4.3.1 (U) Blowing Rain

3.4.4.3.1.1 (U) Other than Storage and Transport

(b)(3)

3.4.4.3.1.2 (U) Storage and Transport

(b)(3)

3.4.4.3.2 (U) Dripping Rain

3.4.4.3.2.1 (U) Other than Storage and Transport

(b)(3)

3.4.4.3.2.2 (U) Storage and Transport

(b)(3)

3.4.4.4 (U) Hail

3.4.4.4.1 (U) Other than Storage and Transport

(U) The JLENS System shall survive during exposure to hail up to one-half inch in diameter.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.4.4.4.2 (U) Storage and Transport

(U) The JLENS System shall be protected during exposure to hail up to one-half inch in diameter.

3.4.4.5 (U) Snow

3.4.4.5.1 (U) Other than Storage and Transport

(U) The JLENS Orbit shall meet performance requirements except sensor performance which can degrade from benign condition during exposure up to 4 inches of snow, with a specific gravity of 0.3, accumulation on ground equipment surfaces and during a snow falling rate of up to 1 inch/hour.

3.4.4.5.2 (U) Storage and Transport

(U) The JLENS System shall be protected during exposure to snow, with a specific gravity of 0.3, accumulation of up to 6 inches in 12 hours.

3.4.4.6 (U) Salt Atmosphere

(U) The systems shall meet performance requirements when exposed to a salt atmosphere in sea locations, coastal regions, and during ocean transportation using MIL-STD-810F Method 509.4 Salt Fog as guidance.

3.4.4.7 (U) Sand and Dust

3.4.4.7.1 (U) Other than Storage and Transport

(U) The Systems shall meet performance, reliability, and maintainability requirements during exposure to blowing sand and dust using MIL-STD-810F Sand and Dust Method 510.4 Procedure I- Blowing Dust and Procedure II- Blowing Sand as guides.

3.4.4.7.2 (U) Storage and Transport

(U) The JLENS Systems, or Components while in a storage or transport configuration shall meet performance requirements after exposure to blowing sand and dust using MIL-STD-810F Sand and Dust Method 510.4 Procedure I – Blowing Dust and Procedure II – Blowing Sand as guides.

3.4.4.8 (U) Fungus

(U) The JLENS system shall only be composed of materials that do not support the growth of fungus or that are protected from environments that would result in fungus growth.

3.4.4.9 (U) Wind

3.4.4.9.1 (U) Other than Storage and Transport

(U) The JLENS Orbit shall meet all performance requirements while being subjected to steady state winds up to 40 kts and 6.5 fps turbulence.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.4.4.9.1.1 (U) Survival Wind

(U) The JLENS Orbit while moored or at altitude shall survive an exposure to steady state winds of up to 80 kts and 10 fps turbulence.

3.4.4.9.2 (U) Storage and Transport

(U) The JLENS Orbit shall survive an exposure to steady state winds of up to 100 kts.

3.4.4.9.3 (U) Wind Turbulence

(U) Deleted

3.4.4.10 (U) Lightning

3.4.4.10.1 (U) Other than Airborne Equipment

(U) All JLENS equipment shall be protected against direct and indirect lightning in accordance with MIL-STD-464 excluding all airborne equipment.

3.4.4.10.2 (U) Airborne Equipment

(U) All JLENS airborne equipment shall survive direct and indirect lightning strikes that produce a maximum of 145 kA.

3.4.4.10.3 (U) Status Recovery

(U) The systems shall return to the state, mode and stored configuration existing prior to a shutdown induced by a nearby lightning strike as defined in MIL-STD-464 after a restart of the system, not requiring repair.

3.4.4.10.4 (U) Lightning EMP

(U) The systems shall be protected against direct-strike and LEMP-induced currents using MIL-HBK-419A and NFPA-780 as guidance.

3.4.5 (U) Induced Environments

3.4.5.1 (U) Vibration

3.4.5.1.1 (U) Other than Storage and Transport

(U) The JLENS System shall meet all performance requirements while being subjected to vibration levels caused during operation.

3.4.5.1.2 (U) Storage and Transport

(U) The JLENS system shall meet all performance requirements following exposure to vibration levels caused by normal transportation, maintenance, or storage. Transportation includes, air, ground (both road and rail), and sea.

...'

3.4.5.2 (U) Nuclear, Biological, and Chemical

3.4.5.2.1 (U) Decontamination

3.4.5.2.1.1 (b)(3)

3.4.5.2.1.2 (U) Effectiveness

(U) The system shall be restorable to an operational condition such that use of MOPP IV need not be continued after a NBC decontamination process.

3.4.5.2.2 (U) Exposure



3.4.5.2.3 (U) Personnel Protection

(U) The JLENS processing station(s) shall provide protection for personnel from the effects of NBC contamination to allow operation without MOPP IV gear during exposure.

3.4.5.3 (U) Electrostatic Discharge (ESD)

3.4.5.3.1 (U) LRU ESD

(U) LRU shall meet performance requirements following exposure to an electrostatic discharge of (b)(3) volts from a 250 ±5% picofarad source and 500 ±5% ohm series resistance.

3.4.5.4 (U) Electromagnetic Environmental Effects (E3)

3.4.5.4.1 (U) Electromagnetic Interference (EMI)

(U) The JLENS Orbit shall protect against spurious electromagnetic interference from other systems using MIL-STD-461E, Table V, Ground Army, as a guide.

3.4.5.4.2 (U) Electromagnetic Compatibility (EMC)

(U) The JLENS Systems shall control extraneous emissions using MIL-STD-461E, Table V, Ground Army, as a guide.

3.4.5.5 (U) Grounding and Bonding

(U) Grounding and bonding shall be implemented using guidance in MIL-STD-464A.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

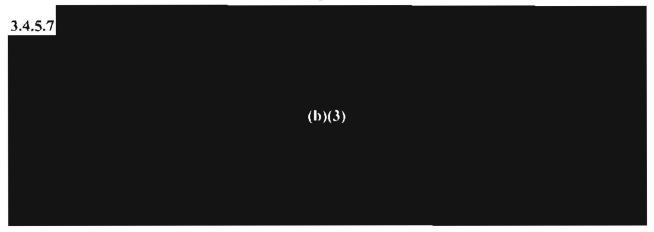
3.4.5.6 (U) Ordnance

3.4.5.6.1 (U) Safe Rendering

(U) The electrically initiated devices (EID) or electro-explosive devices (EED) shall be capable of being rendered safe using explosive ordnance disposal (EOD) tools, methods, and technology.

3.4.5.6.2 (U) Inadvertent Ignition

(U) The EIDs and EEDs shall be protected from inadvertent ignition during, or experience degraded performance characteristics after, exposure to externally radiated electromagnetic environments (EME) using MIL-STD-464A as guidance.



3.5 (U) Standardization and Commonality

3.5.1 (U) Vehicles, Shelters, and Trailers

(U) The JLENS Orbit shall use standard military vehicles, shelters and trailers unless the government approves justification for non-military equipment.

3.5.2 (U) Lifting and Handling Equipment

(U) Military lifting and handling equipment shall be used for the JLENS Orbits, unless the government approves justification for non-military equipment.

3.6 (U) Interoperability

(U) The system shall comply with the applicable information technology standards contained in the DoD Information Technology Standards Registry (DISR).

3.6.1 (U) Global Positioning System (GPS)

(U) The systems shall perform system initialization and synchronization utilizing GPS (b)(3) data in GPS standard format.

3.6.2 (U) Internet Protocol

(b)(3)

3.6.3 (U) External BM/C4I Interface

(U) The system shall prioritize data reporting using guidelines established by an external BM/C4I authority.

3.6.4 (U) C4ISR Architectures

(U) The system shall integrate into existing Service and JTAMD C4ISR architectures.

3.6.5 (U) Secondary Data Dissemination

(U) The JLENS Orbit shall disseminate appropriate types of information on defense information systems network (DISN), military satellite communications (MILSATCOM), Super High Frequency SATCOM, Ultra High Frequency SATCOM, Secure Telephone Unit-III/Secure Telephone Equipment, Signal Corps Communications assets (currently known as Warfighter Information Network-Terrestrial (WIN-T) Increment 1), and Secure Internet Protocol Router Network.

3.6.6 (U) Network Degradation

(U) The JLENS Orbit C4I systems shall interface to external networks without degrading the nominal operation of those networks.

3.6.7 (U) Communication and Data Interfaces Implementation

(U) The systems shall implement an interface to the tactical satellite (TACSAT) for voice connectivity to the Joint Interface Control Officer.

3.6.8 (U) Extensible Markup Language (XML) Interface

(U) The systems shall interface with AMDWS.

3.6.9 (U) Tactical Data Information Link J (TADIL J)/Link 16

3.6.9.1 (U) Link 16 Participants

(U) The systems shall be participants as defined per MIL-STD-6016C on TADIL J/Link 16.

3.6.9.2 (U) Joint Range Extension Application Protocol Participants

(U) The systems shall be participants on Joint Range Extension Application Protocol as defined per MIL-STD-3011, Appendix A and C.

3.6.9.3 (U) Aerial Data Type

(U) The systems shall provide aerial surveillance, aerial target detection and aerial target tracking data utilizing Link 16 in accordance with MIL-STD6016C and MIL-STD-3011, non-simultaneously.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.6.9.4 (U) SMT Data Type

(U) The systems shall provide surface target detection and surface target tracking data utilizing Link 16 in accordance with MIL-STD-6016C and MIL-STD-3011, non-simultaneously.

3.6.9.5 (U) Receive Data Type

(U) The systems shall receive and process aerial and surface moving tracks from external sources utilizing Link 16 in accordance with MIL-STD-6016C and MIL-STD-3011.

3.6.9.6 (U) Aerial Engagement Support Data

(b)(3)

3.6.9.7 (U) Receive Fire Control Support Engagement Information

(b)(1)

3.6.9.8 (U) Provide Fire Control Support Engagement Information

(b)(1)

3.6.9.9 (U) Provide CID Support Data

(U) The systems shall provide Combat ID support data, including IFF responses, utilizing Link 16 in accordance with MIL-STD-6016C and MIL-STD-3011, non-simultaneously.

3.6.9.10 (U) Provide Operational Status and Change Information

(U) The systems shall provide operational status and change of operational status information utilizing Link 16 in accordance with MIL-STD-6016C and MIL-STD-3011, non-simultaneously.

3.6.10 (U) Cooperative Engagement Capability (CEC)

3.6.10.1 (U) CEC Participation

(U) The systems shall participate on the CEC network.

3.6.10.2 (U) Provide Aerial Data Type

(b)(3)

3.6.10.3 (U) Receive Aerial Data Type

(b)(3)

3.6.10.4 (U) Aerial Engagement Support Data

(h)(3)

3.6.10.5 (U) Provide CID Support Data

(b)(3)

3.6.10.6 (U) Provide Operational Status and Change Information

(b)(3)

3.6.11 (U) Integrated Broadcast Service (IBS)

3.6.11.1 (U) Provide Aerial Data Type

(U) The systems shall provide aerial surveillance, aerial target detection and aerial target tracking data for situational awareness utilizing IBS in accordance with the IBS Common Message Format (CMF) Interactive (IBS (I)) and Joint Tactical Terminal (JTT).

3.6.11.2 (U) Provide SMT Data Type

(U) The systems shall provide surface target detection and surface target tracking data for situational awareness utilizing IBS in accordance with the IBS (I) and JTT.

3.6.11.3 (U) Receive Aerial Data Type

(U) The systems shall receive and process aerial tracks from external sources utilizing IBS in accordance with the IBS (I) and JTT.

3.6.11.4 (U) Receive SMT Data Type

(U) The systems shall receive and process surface moving tracks from external sources utilizing IBS in accordance with the IBS (I) and JTT.

3.6.11.5 (U) Receive Fire Control Support Engagement Information

(b)(3)

3.6.11.6 (U) Provide Fire Control Support Engagement Information

(b)(3)

3.6.11.7 (U) Provide TBM and LCR LPE

(U) The systems shall provide TBM and LCR LPE information utilizing IBS in accordance with the IBS (I) and JTT.

3.6.12 (U) Army Battle Command System (ABCS)

3.6.12.1 (U) Provide SMT Data Type

(U) The systems shall provide surface target detection and surface target tracking data utilizing the ABCS network.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.6.12.2 (U) Provide Operational Status and Change Information

(U) The systems shall provide operational status and change of operational status information utilizing the ABCS network.

3.6.12.3 (U) Provide Aerial Data Type

(U) The systems shall provide aerial target detection and aerial target tracking data utilizing the ABCS network.

3.7 (U) Identification Friend or Foe

3.7.1 (U) IFF Range

(b)(1)

3.7.2 (U) IFF Interrogator Modes

(U) The systems shall include an on-board IFF system consisting of an interrogator that supports modes 1, 2, 3A, 3C, 4, 5 (level 1 and level 2), and (receive only squitter Mode S [O]) and is compatible with DoD IFF systems.

3.7.3 (U) IFF Transponder Modes

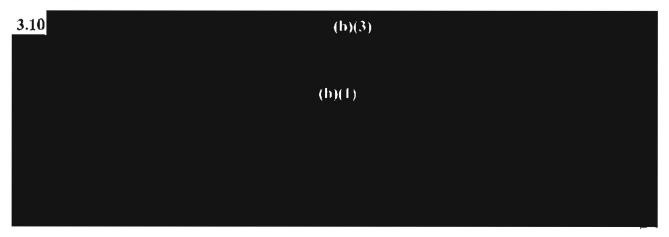
(U) The systems shall include an on-board IFF system consisting of a transponder that supports modes 1, 2, 3A, 3C, 4, 5 (level 1 and level 2), and S and is compatible with DoD IFF systems.

3.8 (U) GPS Compliance

(U) Non-tethered airborne GPS related equipment shall be global air traffic management (GATM) compliant.

3.9 (U) Precise Participant Location and Identification (PPLI)

(U) The systems shall interpret PPLI messages and correlate this information to organic tracks, as appropriate.



MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

(b)(1)

3.11 (U) Movement

3.11.1 (U) Rail Transportation

(b)(3)

3.11.1.1 (U) Rail Transportation Tunnel

(b)(3)

3.11.1.2 (U) Rail Transport Vibration

(U) The JLENS Orbit shall perform without degradation after exposure to the Railroad Transportation vibration of MIL-STD-810F, Method 514.5, Procedure I, Category 11.

3.11.2 (U) Land Transportation

3.11.2.1 (U) Highway Transportation

(U) The JLENS Orbit shall be transportable on highways defined in MIL-STD-1366D including special permits.

3.11.2.2 (U) Secondary Road Transportation

(U) The JLENS Orbit shall be transportable on secondary roads as defined in section 6.2.

3.11.2.3 (U) Unimproved Road Transportation

(U) The JLENS Orbit shall be transportable on unimproved roads represented by the Perryman Cross-Country Course No. 1.

3.11.2.4 (U) Off-road Transportation

(U) The JLENS Orbit shall be transportable off-road for (b)(3)

3.11.2.5 (U) Large Assembly Transport Vibration

(U) The JLENS Orbit shall meet performance requirements after exposure to unimproved roads represented by the Perryman Cross-Country Course No. 1, and the following mobility profile for primary, secondary, and unimproved roads given by the Operational Mode Summary/Mission Profile in Appendix E.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.11.3 (U) Sea Transportation

(U) The JLENS Orbit shall be marine transportable in accordance with MIL-STD-1366 section titled Water Transportation.

3.11.3.1 (U) Sea Transportation Vibration

(U) The JLENS Orbit shall perform without degradation after exposure to the Ship Transportation vibration of MIL-STD-810F, Method 514.5, Procedure I, Category 10.

3.11.4 (U) Air Transportation

(U) The JLENS Orbit shall be transportable on C-130 (except the Mobile Mooring Station (MMS), peculiar ground support equipment and ISO containers / shelters that do not conform to the 8' x 8' x 20' dimensions), C-5 and C-17 aircraft.

3.11.4.1 (U) Air Transport Vibration

(U) The JLENS Orbit shall perform without degradation after exposure to the Aircraft vibration of MIL-STD-810F, Method 514.5, Procedure I, Category 7 and 8.

3.11.5 (U) Transportation Packaging

(U) Except for items approved by the government JLENS Product Manager, all JLENS equipment shall be packed for shipment using standard ISO containers, shelters, or pallets that are compatible with military standard lifting and handling equipment.

3.11.6 (U) Transportation Performance-oriented Packaging

(U) The JLENS Orbit shall meet the U.S. Department of Transportation (DOT), NATO, and European Union (EU) performance-oriented packaging (POP) standards for unrestricted highway, rail, and sea transportation.

3.11.7 (U) Shock

3.11.7.1 (U) Functional Shock

(U) The JLENS System shall meet all performance requirements while being subjected to shock levels caused during normal operation.

3.11.7.2 (U) Rail Shock

(U) The JLENS Orbit shall meet all performance requirements after being subjected to the rail impacts as defined in MIL-STD-810F Method 516.5, Procedure VII.

3.11.7.3 (U) Packaged LRU Drop

(U) The JLENS LRUs in their shipping containers shall meet their performance requirements after being subjected to MIL-STD-810F Method 516.5, Procedure II.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.11.7.4 (U) Transit Drop

3.11.7.4.1 (U) Transit Edge Drop

(U) The JLENS system shall meet performance requirements after being subjected to a bottom edge-wise drop while in the Movement State using MIL-STD-810F Method 516.5, Procedure IV as guidance.

3.11.7.4.2 (U) Transit Flat Drop

(U) The JLENS system shall meet performance requirements after being subjected to a [b)(3) flat (bottom face) drop while in the Movement State using MIL-STD-810F Method 516.5, Procedure IV as guidance.

3.11.7.4.3 (U) Transit Flat Drop for Fragile Hardware

(U) Fragile components of the JLENS system shall meet performance requirements after being subjected to (b)(3) flat (bottom face) drop while in the Movement State using MIL-STD-810F Method 516.5, Procedure IV as guidance.

3.11.7.4.3.1 (U) Transit Shock Indicators for Fragile Hardware

(U) Mechanical shock indicators shall be included in ISO shipping containers and shelters containing fragile hardware.

3.11.7.4.3.2 (U) Container Handling for Fragile Hardware

(U) The exterior of the shipping containers containing fragile hardware shall be marked with special handling procedures using MIL-STD-129P as guidance.

3.11.7.4.3.3 (U) Fixture Handling for Fragile Hardware

(U) Each JLENS unique transportation fixtures containing fragile hardware shall be marked with special handling procedures using MIL-STD-129P as guidance.

3.11.7.5 (U) Transport and Handling Vehicles

(U) JLENS Orbit shall use standard military vehicles for ground transportation and handling.

3.11.8 (U) March Order and Emplacement

3.11.8.1 (U) Emplacement Time

(U) The JLENS Orbit shall be operational within (b)(3) from arrival of all equipment on two prepared sites as defined in section 6.2.

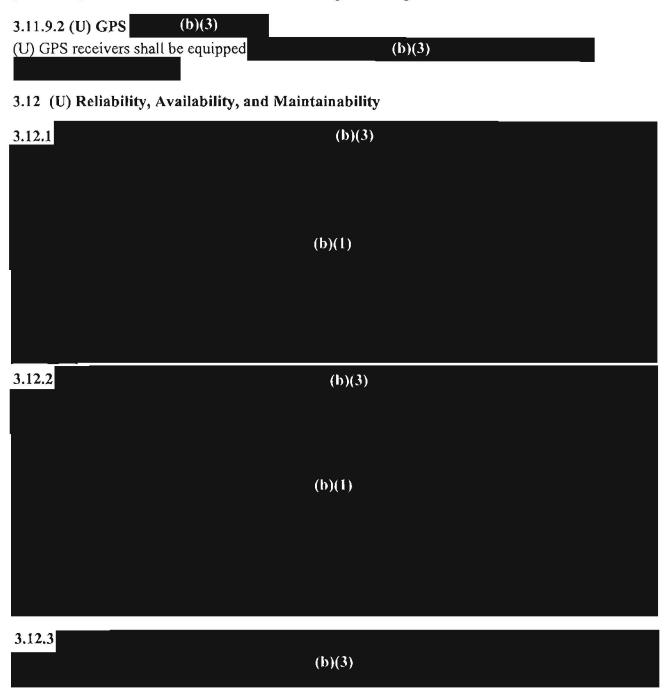
3.11.8.2 (U) March Order Time

(U) The JLENS Orbit shall transition from operational status to March Order configuration within (b)(3)

3.11.9 (U) Location, Position, and Alignment

3.11.9.1 (U) Inertial Navigation System

(U) The systems shall incorporate a GPS-aided inertial navigation system for automatic positioning, orientation determination and data alignment /registration.



3.12.4

(b)(3)

3.13 (U) Fault Detection and Isolation

3.13.1 (U) Monitoring

(U) The systems shall continuously monitor the operational status.

3.13.2 (U) Status Reporting to the Operator

(U) The systems shall display the operational status to the operator.

3.13.3 (U) Fault Storage

(U) The detected faults shall be stored in non-volatile memory or on removable data storage devices.

3.13.4 (U) Failure Detection and Isolation

(U) All system critical failures shall be detected and isolated (detection and isolation are performed through a combination of interactive electronic technical manuals (IETM) procedures and built-in test/built-in test equipment (BIT/BITE)).

3.13.5 (U) BIT/BITE Operational Impact

(U) Operational performance shall meet performance requirements during the execution of background BIT/BITE.

3.13.6 (U) Fault Detection and Isolation

(U) Fault detection and isolation to an ambiguity group of no greater than five (one [O]) line replaceable units (LRU) shall be correct not less than 95% of the time.

3.13.7 (U) BIT/BITE False Alarm Rate

(U) False alarm rate for all critical failure BIT/BITE notifications shall be less than 10%.

3.13.8 (U) Prognostic Incorporation

(U) The systems shall incorporate a continuous prognostic capability to evaluate the condition of, and predict impending faults and failures of, electronic and mechanical elements / components.

3.13.9 (U) Prognostic Performance

(U) The prognostic capability shall predict impending faults and failures of components such that 30% of impending critical faults or failures are identified (with 70% accuracy [O]) within no less than 20 hours before mission failure.

3.13.10 (U) Prognostic Data

(U) The systems shall provide prognostic system data on demand.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.13.11 (U) BIT/BITE Circuitry Isolation

(U) The Systems shall meet mission critical requirements during failure of BIT/BITE circuitry, excluding safety critical BIT indicators.

3.13.12 (U) Failure Degradation

(b)(3)

3.14 (U) Logistics

3.14.1 (U) Standard Test Equipment

(U) The system shall use army standard Test, Measurement, and Diagnostic Equipment (TMDE) and automatic test equipment (ATE).

3.14.2 (U) Non-standard Test Equipment

(U) Where standard TMDE or ATE cannot be used, the contractor shall obtain prior government approval before proceeding with the JLENS Orbit design.

3.14.3 (U) Supply

(U) The systems shall conform to Service supply systems.

3.14.4 (U) Maintenance Concept

(U) The JLENS Orbit shall have a two-level maintenance concept for system peculiar equipment (e.g., radars and platform) and the existing maintenance concept for common equipment.

3.14.5 (U) Preventive Maintenance Checks and Services (PMCS)

3.14.5.1 (U) Scheduled System Maintenance

(b)(3)

3.14.5.2 (U) Aerostat Retrieval Cycle

(b)(3)

3.14.6 (U) Supply Support Concept

(U) Supply management, transportation and storage of helium shall be included in the logistics support concept.

3.14.7 (U) Helium Quantity

(U) Each JLENS Orbit shall include the required volume of helium and the required number of helium containers for two orbit inflations and replenishment for a continuous 120 day period available on site.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.14.8 (U) Unique Identification

(U) The JLENS equipment shall be marked for unique identification in accordance with MIL-STD-130L.

3.15 (U) Safety

(U) The JLENS system shall not cause injury, illness, or death to personnel; damage to or loss of a system, equipment or property; or damage to the environment when operated, maintained, and transported using the contractor specified safety procedures and operating/maintenance manuals as approved by the government in accordance with MIL-STD-882D.

3.15.1 (U) Mishap Risk Values

(U) The JLENS Orbit shall have no Mishap Risk Values rated high or serious, within program constraints, as defined in MIL-STD-882D Appendix Table A-IV.

3.15.2 (U) Noise

(U) Noise levels and durations shall adhere to MIL-STD-882D and MIL-STD-1472.

3.16 (U) Survivability



3.16.3 (U) Distinctive Characteristics

(U) The systems shall exhibit minimal distinctive RF, thermal, optic, and acoustic signatures. [O]

3.17 (U) Computer Hardware / Software

(U) The systems shall provide computing equipment and host software to incorporate databases that support requirements of C4I, logistics, personnel and medical, and other mission and support functions. Database updates can be accomplished by reloading data via internal or external networks or other media while meeting all performance requirements.

3.17.1 (U) Uninterruptible Power Source (UPS)

(U) Ground-based processors shall employ an UPS to support orderly shutdown so they can be restarted, preserving the integrity of the databases.

3.17.2 (U) Data Processing Reserve Capacity

(U) The systems shall be designed such that there is an inherent 50% reserve computer memory and computer throughput for data processing.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.17.3 (U) Signal Processing Reserve Capacity

(U) The systems shall be designed such that there is an inherent 50% reserve computer memory and computer throughput for signal processing. [O]

3.17.4 (U) Removable Storage Media

(U) All classified data storage media including floppy disks, hard disks, compact disks, and tapes shall be easily removed from the computer without the use of special tools or equipment.



3.18 (U) Power

3.18.1 (U) U.S. Prime Power

(U) Each JLENS system shall meet all performance requirements when operating on 60 Hz, 3 phase, alternating current (AC) electrical power supplied from the U.S. commercial power system.

3.18.2 (U) Alternate Power

(U) Redundant standard DoD generators shall be used as an alternate for power where commercial power is not available.

3.18.3 (U) Automatic Power Switching

(U) The system shall automatically switch from commercial to tactical power and from primary to backup tactical power without system interruption.

3.18.4 (U) Manual Power Switching

(U) The system shall manually switch between tactical and commercial power and between primary and backup tactical power without system interruption.

3.18.5 (U) Foreign Prime Power

(U) Each JLENS system shall meet all performance requirements when operating on power supplied from any non-U.S. commercial power system. [O]

3.19 (U) Other Modes
(b)(1)

3.20 (U) Modularity
(b)(3)

3.21 (U) Information Assurance



3.21.1 (U) Classified and Unclassified Information

(U) The JLENS Orbit shall receive, process, store, and disseminate classified and unclassified information by independent systems.

3.21.2 (U) Process Approval

(U) Interconnection of systems operating at different classification levels shall be accomplished by processes (e.g., SECRET and below interoperability (SABI)) that have been approved by the DoD Chief Information Officer (CIO).

3.21.3 (b)(3)

3.22 (U) Human Engineering

(U) Human Factors Engineering shall be implemented on the JLENS Orbit using MIL-STD-1472F as a guide.

3.22.1 (U) Anthropometrics

(U) The JLENS Orbit shall be operable, maintainable and resupplied by 5th to 95th percentile of Army personnel while wearing worst case combat gear and protective clothing (cold weather / Mission Oriented Protective Posture (MOPP) IV) in accordance with DoD HDBK 743A (for guidance) and MIL-STD-1472F.

3.22.2 (U) Environmental Control Systems

(U) Environmental control systems and other features shall support human physical needs, endurance, and comfort during extended operations.

3.22.3 (U) Human-To-Machine Interfaces

(U) The operator station human-to-machine interfaces shall be designed to use state-of-the-art computer and display technology.

3.22.4 (U) Symbology

(U) Symbology shall be consistent with current Army Command, Control, Communications, Computers, and Intelligence (C4I) system operations, development, and training using MIL-STD 2525-B and MIL-STD-1477C.

3.23 (b)(3)

3.23.1 (U) EO/IR Surveillance Range

(U) The systems shall incorporate EO/IR surveillance with sufficient resolution to distinguish between wheeled vehicles, tracked vehicles and dismounted personnel out to 5 km from the mobile mooring station in clear weather and air conditions [O].

3.23.2 (U) EO/IR Azimuth Coverage

(U) The optics capability shall provide real-time video, 360 degrees slewable with day and night capabilities [O].

3.23.3 (U) EO/IR System Control

(U) The EO/IR System shall be controlled remotely from a location with a linear distance NLT 500 feet from the communications processing group [O].

3.24 (U) Platform

(U) The platform is defined to consist of the mobile mooring station, tether, air vehicle and ground support equipment.

3.24.1 (U) Interchangeability

(U) The surveillance and fire control platforms shall be interchangeable.

3.24.2 (b)(3)

3.24.3 (U) Visual Flight Rules

(U) The platform shall include all required equipment to fly in Visual Flight Rules (VFR) conditions.

3.24.4 (U) Instrumented Flight Rules

(U) The platform shall include all required instrumentation to fly in Instrumented Flight Rules (IFR) conditions.

3.24.5 (U) Tether

(U) The tether shall provide connection between the mooring station and the air vehicle and control the air vehicle operating altitude.

3.25 (U) Air Vehicle

(b)(3)

3.25.1 (b)(3)

3.25.2 (U) Strobe Light

(U) The air vehicle shall include strobe lighting configured for operator selected visual or infrared modes.

3.26 (U) Ground Support Equipment (GSE)

3.26.1 (U) Meteorological Monitoring

(U) GSE shall include equipment to monitor and record meteorological data and conditions to include: temperature, humidity, precipitation, icing, wind velocity, barometric pressure and lightning.

3.26.1.1 (U) Meteorological Monitoring Range

(U) Meteorological equipment shall have a range to provide warning to allow the air vehicle to be in-hauled and moored for protection against thunderstorms and winds greater then the limits specified in section 3.

3.26.1.2 (U) Weather Display

(U) Standard weather forecasts, data and observations shall be displayed in the Processing Station.

3.26.2 (U) Flight Directors Station

(U) The flight director's station shall be located in the processing station.

3.27 (U) Fire Control System

(U) The JLENS Fire Control System will provide sector surveillance information, Fire Control support and accept cues from other systems.

3.27.1 (U) USMCEB Certification

(U) The Fire Control System shall be designed to be certifiable by the U.S. Military Communications-Electronics Board (USMCEB) to operate in frequency bands in accordance with the national and international tables of spectrum allocation.

3.27.2 (U) Operational Bandwidth

(b)(1)

3.27.3 (U) Fire Control System ABT Loading

3.27.3.1 (b)(3)

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.27.3.2 (U) Stressing Target Loading Scenario

(b)(1)

3.27.3.3 (U) Surveillance Target Loading

(b)(1)

3.27.3.4 (b)(3)

3.27.3.4.1 (b)(3)

3.27.3.4.2 (b)(3) (b)(1)

3.27.4 (U) Fire Control Radar Operational Functions

(U) The Fire Control System shall support the following non-simultaneous functions.

- Surveillance, Detection, Tracking, Discrimination, Classification, and Engagement support for Air Breathing Targets (ABT).
- Surveillance, Detection, Tracking, and Discrimination for Surface Moving Target (SMT)
- Surveillance, Detection, Tracking and Launch Point Estimation for TBM
- Surveillance, Detection, Tracking and Launch Point Estimation for LCR

3.27.4.1 (U) Interleaving

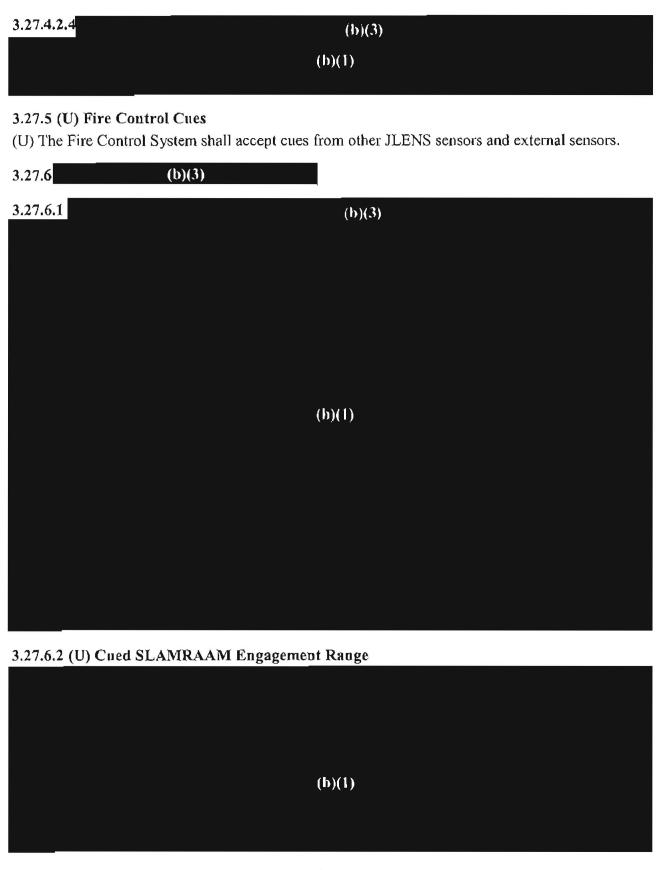
(U) The Fire Control System shall permit interleaving of ABT and SMT functions.

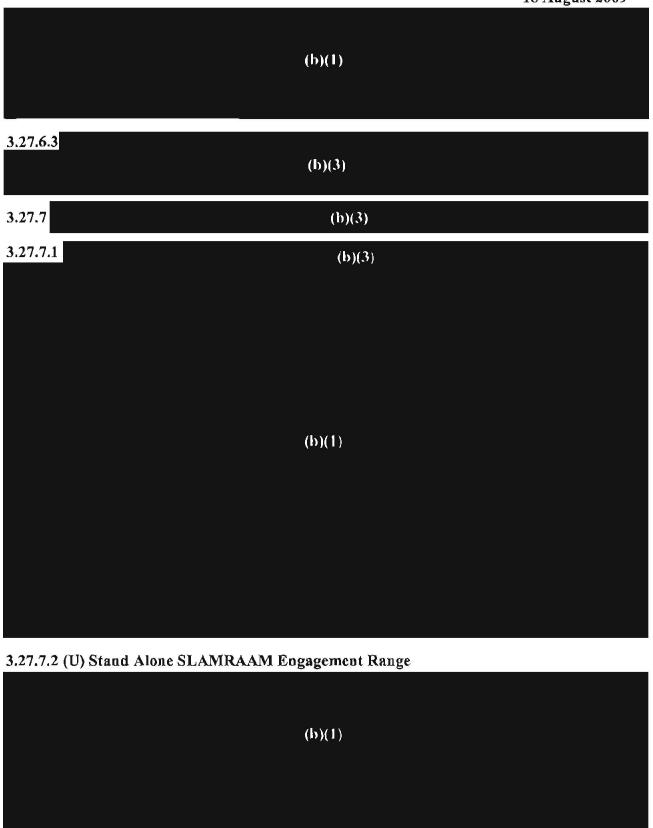
3.27.4.2 (U) Air Breathing Target Function

3.27.4.2.1 (U) Function Priorities

(U) The Fire Control System shall accept and implement priorities defined in the mission plan.

3.27.4.2.2 (b)(3)
3.27.4.2.3 (b)(3)





MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

	(b)(1)	
3,27.7.3	(b)(3)	

3.27.8 (U) Instrumented Rauge

(U) The Fire Control System shall have an instrumented range of NLT 550 km.

3.27.9 (U) ABT Target Tracking

(U) ABTs operating above the radar horizon shall be tracked at ranges commensurate with their signature and location within the electronic field of view of the Fire Control sensor.

3.27.9.1 (U) ABT Target Discrimination

	(b)(1)
3.27.10 (U) Transition to Track	(b)(3)
3.27.11	(b)(3)
	(b)(1)

3.27.12 (U) SLAMRAAM Accuracy

(b)(1)

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

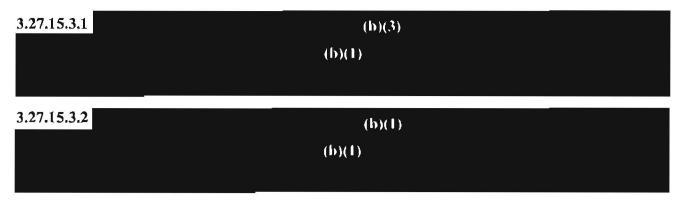
(b)(1)
3.27.13 (b)(3)
3.27.14 (b)(3)
3.27.14.1 (U) Update Rate
(b)(3)
3.27.14.2 (U) Range and Azimuth Accuracy
(b)(3)
3.27.14.3 (U) Relative Position Accuracy
(b)(3)
3.27.14.4 (U) Target Altitude Accuracy
(h)(3)
3.27.15 (U) Sectored Surveillance
3.27.15.1 (U) Sectored Surveillance Azimuth Coverage (U) The Fire Control System shall provide operator selectable sectored surveillance azimuth coverage extents to a maximum of NLT 100°.
3.27.15.2 (U) Instrumented Range

(b)(3)

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

٧,

3.27.15.3 (U) Sectored Surveillance Range



3.27.15.4 (U) Track Initiation

(U) The Fire Control System shall provide automatic track initiation of detected targets.

3.27.15.5 (U) ABT False Tracks

	(b)(1)		

3.27.16 (U) SMT Function

(U) The Fire Control system shall perform SMT detection and track against the SMT threat defined in Section 3 when operating in the environments defined in Appendices B, and C.

3.27.16.1 (U) SMT Surveillance Azimuth Coverage

(U) The Fire Control System shall provide operator selectable sectored SMT surveillance azimuth coverage extents to a maximum of NLT 100°.

3.27.16.2 (U) SMT Target Loading

(b)(1)

3.27.16.3 (U) SMT Target Location Error

(b)(1)

3.27.16.4 (U) SMT Track Initiation

(U) The Fire Control System shall provide automatic track initiation of detected targets.

3.27.16.5 (U) SMT Number of False Tracks

(b)(1)

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009



3.27.17 (U) TBM Function

(U) The Fire Control system shall track TBM threats that are in the ascent phase and determine a launch point estimate (LPE) for the TBM threats as defined in Section 3.3.2 while operating in a sector surveillance function.

3.27.17.1 (U) TBM Surveillance Azimuth Coverage

(U) The Fire Control System shall provide operator selectable sectored TBM surveillance azimuth coverage extents to a maximum of NLT 100°.

3.27.17.2 (U) Elevation Coverage

(U) The Fire Control system shall track TBMs as defined in Section 3.3.2 during ascent phase until it is

(b)(3)

3.27.17.3 (U) Launch Point Estimate

(b)(1)

3.27.18 (U) LCR Function

(U) The Fire Control system shall track ascent phase and determine launch point estimate (LPE) for the LCR threats as defined in Section 3.3.2 while operating in a LCR sector surveillance function.

3.27.18.1 (U) LCR Surveillance Azimuth Coverage

(U) The JLENS Fire Control system shall provide surveillance over a 100° azimuth sector to detect and track LCR threats defined in Section 3.3.2.

3.27.18.2 (U) Elevation Coverage

(U) The Fire Control system shall track LCRs as defined in Section 3.3.2 while operating in a sector surveillance function.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.27.18.3 (U) Launch Point Estimate



3.27.22 (U) Range Resolution

	(b)(1)	

3.27.23 (U) Discrimination

Deleted (Modified and Moved to Appropriate Sections)

3.27.24 (U) CID Technique 1

	(b) (1)	
3.27.25 (U) CID Technique 2		
	(b)(1)	
3.27.26 (U) CID Technique 3	1000	

(b)(1)

3.27.27 (U) Clutter Tracks

(U) The Fire Control System shall include automatic and operator adjustable manual controls to reduce the number of moving clutter tracks reported to the networks.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009



3.28 (U) Processing Station.

(U) The processing station shall house the operator stations, signal data processors and communications equipment.

3.28.1 (U) Interchangeability

(U) The communication and control shelter, operator stations and communications equipment shall be interchangeable between Fire Control and Surveillance System.

3.28.2 (U) Operator Station(s)

3.28.2.1 (U) System Initialization

(U) The system shall be initialized via the operator station to conduct its assigned mission using rules defined by the directing C2 node [e.g., geo-political boundaries, air corridors, surveillance/engagement sectors, CID, surface weapon systems engagement support, priorities, Tactics Techniques and Procedures (TTP), and reporting rules].

3.28.2.2 (U) Automation

(U) System initialization shall be automatic and have the capability for manual update.

3.28.2.3 (U) Location Systems

(U) The system initialization and operation shall use organic automated location systems as input.

3.28.2.4 (U) Terrain Analysis

(U) The system shall perform terrain analysis to support the mission using standard National Imagery and Mapping Agency (NIMA) data to Level 1 and 2 Digital Terrain Elevation Data (DTED), standard world vector shoreline (WVS) maps and Digital Feature Analysis Data (DFAD).

3.28.2.5 (U) Mission Control

(U) The operator station shall control the system mission operations automatically and manually via operator intervention.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.28.2.6 (U) Tasking Responses

(U) The system shall respond to tasking by C2 elements and surface weapon systems for engagement support.

3.28.2.7 (U) Operator Actions

(U) The operator station shall provide a selectable display that presents at a minimum, initialization information, system status information, and sensor data.

3.28.2.8 (U) Target Designation

(U) The operator shall have the option to designate targets to be placed into precision track and targets to be dropped.

3.28.2.9 (U) Integrated Data Management Environment

(U) The system shall provide an integrated data management environment that supports information discovery, knowledge management, automated archiving, consistency checking and personalized access controls. Information discovery and knowledge management is satisfied by having an organized file structure on operator computer systems that can be searched by automated processes and is augmented by decision aids.

3.28.3 (U) Embedded Training

(U) The processing station shall incorporate embedded training to support sustainment training of the operator and maintainers of all orbit hardware and software elements.

3.28.3.1 (U) Simulated Conditions

(U) System embedded training shall simulate realistic conditions.

3.28.3.2 (U) Individual Training

(U) Embedded training shall provide individual training by simulating problem situations that replicate actual mission operations.

3.28.3.3 (U) Team Training

(U) Embedded training shall provide team training by simulating problem situations that replicate actual mission operations.

3.28.3.4 (U) Unit Training

(U) Embedded training shall provide unit collective training by simulating problem situations that replicate actual mission operations.

3.28.3.5 (U) Web-based Training

(U) Web-based training shall be provided as an integral part of the embedded training capability.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.28.3.6 (U) Growth

(U) All embedded trainers and training devices shall be designed for growth potential and upgraded when doctrinal, procedural, software, or hardware changes to tactical system are required.

3.28.3.7 (U) Distributed Interactive Simulation

(U) The processing station shall participate in simulated training exercises by incorporating Distributed Interactive Simulation (DIS).

3.28.3.8 (U) Joint Semi-Automated Forces (JSAF)

(U) The processing station embedded trainer shall be interoperable through the Joint Semi-Automated Forces (JSAF) architecture to link, simultaneously, the live and virtual pieces of the training arena.

3.28.3.9 (U) High Level Architecture

(U) The system embedded training shall be compliant and interoperable with High Level Architecture (HLA).

3.28.3.10 (U) Common Training

(U) The systems shall include embedded training which can interface, interact, and accept the common simulated air picture as viewed by

(b)(3)

3.29 (U) Communications

3.29.1 (U) Interface Panel

(U) The processing station shall have a signal entrance panel at the shelter exterior to interface electronically and mechanically with tactical, non-tactical and commercial telephone systems and have organic user communications equipment.

3.29.2 (U) Message Format

(U) The Systems shall exchange force operations / sensor management information with its supported / affiliated battle management center or node via United States Message Text Format (USMTF) and XML format or other message formats as approved by the government.

3.29.3 (U) Text Formatted Messages

(U) The Systems shall have the capability to receive, exchange, display and archive mission support computer-assisted electronic text-formatted messages.

3.29.4 (U) Air and Missile Defense Planning and Control Station

(U) DELETED.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.29.5 (U) Voice Communications

(U) The Systems operators and maintainers shall have multiple means of voice communications available to include military telephones and radios.

3.29.6 (U) Combat Net Radio

(U) The Systems shall have a combat net radio (CNR) capability, either frequency modulation (FM) or high frequency (HF), to support organizational C2, and administration and logistics.

3.29.7 (U) Tactical Voice Communications

(U) The systems shall have voice communications systems that interface to military tactical telephone systems including Secure Telephone Units (STU) or Secure Terminal Equipment (STE).

3.29.8 (U) Commercial Voice Communications

(U) The systems shall have voice communications systems that interface to commercial telephone systems.

3.29.9 (U) Defense Switched Network

(U) The systems shall have the capability to communicate via the secure defense switched network (DSN).

3.29.10 (U) Integrated Services Digital Network

(U) The systems shall have the capability to communicate via the integrated services digital network (ISDN).

3.29.11 (U) Air and Missile Defense Workstation

(U) The systems shall maintain communications in the Army Battle Command System (ABCS) via the Air and Missile Defense Workstation (AMDWS) for Force Operations.

3.30 (U) Data Recording

(U) The systems shall provide real time recording and storage of data.

3.30.1 (U) Data Recording Impacts

(U) The systems shall record all data types defined in section 6.2 while meeting all of its operational performance requirements.

3.30.2 (U) Data Recording Control

(U) The systems shall operate under manual control for selecting details for data recording.

3.30.3 (U) Data Storage Devices

(U) The systems shall provide nonvolatile, data storage devices with removable media.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.30.4 (U) Media Changeover

(h)(3)

3.30.5 (U) Selective Data Retrieval

(U) The systems shall provide selective data retrieval, report formatting and report generation via an interactive operator interface.

3.30.6 (U) Interactive Operator Interface

(U) The systems shall provide recorded data archival via an interactive operator interface for post mission analysis.

3.30.7 (U) Data Recording Duration

3.30.7.1

(b)(3)

3.30.7.2 (U) Mission Data Recording Duration

(U) The systems shall provide data recording of other mission data (operator actions, tracks and messages to/from the Processing Station) for not less than 4 hours (12 hours [O]) in support of post mission analysis and testing.

3.30.7.3 (U) Voice Recording Duration

(U) The systems shall continuously record intercom tactical and processing station voice communications for 12 hours.

3.30.7.4 (U) Video Recording Duration

(U) The systems shall continuously record all operator video displays for 12 hours. [O]

3.30.7.5 (U) Weather Data Recording Duration

(U) The systems shall continuously record organic weather data for 12 hours.

3.30.7.6 (U) Video Data Playback

(U) The systems shall provide a selective video playback capability through existing organic workstations. [O]

3.30.7.7 (U) Voice Playback

(U) The systems shall provide a selective voice playback capability through existing organic workstations.

3.31 (U) Surveillance System

(U) The JLENS Surveillance System will provide wide area- surveillance information for the following non-simultaneous functions:

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

- (U) Air Breathing Target surveillance
- (U) TBM target surveillance
- (U) LCR target surveillance
- (U) Surface Moving Target (SMT) surveillance

3.31.1 (U) Air Breathing Target (ABT) Function

(U) The JLENS Surveillance System shall perform ABT detection and tracking of the ABT threat defined in section 3.3.2 when operating in the environments defined in Annex A and Appendix C and section 3.4.

3.31.2 (U) Azimuth Coverage

(U) The Surveillance System shall have the capability to continuously cover 360° in azimuth.

3.31.3 (U) Elevation Coverage				
	(b) (1)			
3.31.4 (U) Field of Regard				
	(b) (1)			
3.31.5 (U) Cueing Range				
(b)(1)				
3.31.6 (U) Surveillance System Target Track Loading				

3.31.6.1 (U) Stressing Target Load

(b)(1)

(b)(1)

3.31.6.2 (U) Saturation Alleviation

(U) The Surveillance System shall provide automatic and user-selectable saturation alleviation.

3.31.7 (U) Stressing Target Cue

(b)(1)

3.31.8 (U) Instrumented Range

(U) The Surveillance System shall provide an instrumented range of NLT 550 km.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.31.9 (U) Track Initiation

(U) The Surveillance System shall automatically initiate tracks.

3.31.10 (U) Air Breathing Target Detection Range

(b)(1)

3.31.11 (U) False Tracks

(b)(1)

3.31.12 (U) Emission Controls

(b)(3)

3.31.12.1 (U) Sector Blanking Control

(U) The Surveillance System shall maintain the blanked sector until commanded by the operator to start radiating in the blanked sector.

3.31.12.2 (U) ERP Control

(b)(3)

3.31.13 (U) Combat ID Support

(b)(3)

3.31.13.1 (U) Surface/Air Declaration

(b)(3)

3.31.13.2 (U) Surface/Air Declaration Accuracy

(b)(3)

3.31.14 (U) TBM Function

(U) The Surveillance System shall track ascent phase and determine launch point estimated (LPE) for the TBM threats as defined in Section 3.3.2.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.31.14.1 (U) Surveillance Coverage

(U) The Surveillance System shall provide 360° surveillance to detect and track TBM threats defined in Section 3.3.2.

3.31.14.2 (U) Elevation Coverage

(U) The Surveillance System shall track TBMs as defined in Section 3.3.2 during ascent phase.

3.31.14.3 (U) Launch Point Estimate

(b)(l)

3.31.15 (U) LCR Function

(U) The Surveillance System shall track ascent phase and determine launch point estimated (LPE) for the LCR threats as defined in Section 3.3.2.

3.31.15.1 (U) Surveillance Coverage

(U) The Surveillance System shall provide 360° surveillance to detect and track LCR threats defined in Section 3.3.2.

3.31.15.2 (U) Elevation Coverage

(U) The Surveillance System shall track LCRs as defined in Section 3.3.2

3.31.15.3 (U) Launch Point Estimate

(b)(1)

3.31.16 (U) SMT Function.

(U) The Surveillance System shall perform SMT detection and track against the SMT threat defined in Section 3.3.2 when operating in the environments defined in Annex A, Appendix C, and section 3.4.

3.31.16.1 (U) Target Load

(b)(1)

3.31.16.2 (U) Detection Range

(b)(1)

3.31.16.3 (U) Track Initiation

(U) The Surveillance System shall have the capability to automatically initiate a SMT track.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

3.31.16.4 (U) False Tracks

(b)(1)

3.31.17 (U) USMCEB Certification

(U) The Surveillance System shall be designed to be certifiable by the U.S. Military Communications-Electronics Board (USMCEB) to operate in frequency bands in accordance with the national and international tables of spectrum allocation.

3.31.18 (U) Clutter Tracks

(U) The Surveillance System shall include automatic and operator adjustable manual controls to reduce the number of moving clutter tracks reported to the networks.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

4 (U) Verification

4.1 (U) General Test and Evaluation Provisions

(U) The methods and procedures that verify the requirements of Section 3 are to be contractor-proposed and Government-approved. Table I defines the verification class and method for each requirement in Section 3. All requirement verification, regardless of class or method, will be conducted and completed by the contractor, unless otherwise stated.

4.2 (U) Requirements Verification

(U) This section establishes the quality assurance provisions for Section 3 of this Performance Specification by establishing requirement verification methods. The purpose of the verification is to assure the deliverable JLENS Orbit conforms to the performance, design and operability requirements stated in Section 3.

4.3 (U) Verification Methods

(U) The intent of assigning specific methods to requirements is to ensure a high level of confidence the requirement is met. Combinations of methods are used to facilitate cost effective means of verification. The following basic methods of verification are applied to the requirements.

4.3.1 (U) Demonstration (D)

(U) Demonstration is an exhibition of the operability or supportability of an item under intended service use conditions. Sufficient data for requirements verification can be obtained by observing functional operation of the system, or a part of the system, without the use of instrumentation or special test equipment beyond that inherently provided in the system being verified.

4.3.2 (U) Test (T)

(U) Test is the verification method by which the operability, supportability, performance capability or other specified qualities of an item are verified when subjected to controlled conditions that are real or simulated. These verifications may require use of special test equipment and instrumentation that is not an integral part of the system being verified to obtain quantitative data for analysis, as well as qualitative data derived from displays and indicators inherent in the item(s) for monitor and control.

4.3.3 (U) Analysis (A)

(U) Analysis is the method used to verify requirements by determining qualitative and quantitative properties and performance of the system by studying and examining engineering drawings, software, and hardware flow diagrams, software and hardware specifications, and other software and hardware documentation (e.g., commercial of-the-shelf (COTS) vendor documentation). It also includes performing modeling, simulation, and/or calculations and analyzing the results. Analysis techniques include interpretation or interpolation/extrapolation of analytical or empirical data collected under defined conditions.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

4.3.4 (U) Inspection (I)

(U) Inspection is the verification method used to verify characteristics of an item by inspecting engineering documentation produced during development or by inspection of the product itself to verify conformance with specified requirements. Inspection is nondestructive and consists of visual inspections or simple measurements without the use of precision measurement equipment. Inspection typically applies to a single parameter or attribute with a yes/no answer.

4.4 (U) Classes of Verifications:

4.4.1 (U) Type D, Design

(U) Type D classes of verifications are those that can be determined in the design phase and recorded prior to any hardware being fabricated.

4.4.2 (U) Type S, System

(U) Type S classes of verifications require the complete assembly of the JLENS Fire Control or Surveillance System to verify the requirement.

4.4.3 (U) Type L, Subsystem

(U) Type L classes of verifications will be used to verify requirements allocated to lower level specifications.

4.4.4 (U) Type O, Orbit

(U) Type O classes of verifications require the complete assembly of the JLENS Orbit to verify the requirement.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

(U) TABLE I Requirement/Verification Cross Reference Matrix

	(U) TABLE I Requirement/Verification Cross 1	Reference Matrix	
		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
		L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3	(U) REQUIREMENTS		•
3.1	(U) Joint Land Attack Cruise Missile Elevated		
	Sensor System (JLENS) Orbit		
3.1.1	(U) Orbit Composition		
3.1.2	(U) Orbit Land and Sea Operations	L/S	A
3.1.3	(U) Systems Standalone Operations	S	T
3.2	(U) Missions		
3.2.1	(U) Primary Mission	0	A/D/T
3.2.2	(U) Secondary Missions	O/S	A/D/T
3.2.3	(U) Impact Point Predictions	S	A
3.3	(U) Threat	3	A
3.3.1	(U) ABT Threat Engagements	O/S	A/T
3.3.2	(U) Threat Surveillance and Tracking	0/\$	A/D/T
3.4		0/3	A/D/1
3.4.1	(U) Operating Environment	_	
	(U) Electronic Countermeasures (ECM) (b)(3)		
3.4.1.1	(b)(3)		
3.4.1.2	_		
3.4.1.3	(b)(3)		
3.4.2	(b)(3)	0	A (12) /TT
3.4.3	(U) Clutter and Multipath	S	A/D/T
3.4.4	(U) Natural Environments		
3.4.4.1	(U) Temperature		
3.4.4.1.1	(U) Other than Storage and Transport	D/S	A/T
3.4.4.1.2	(U) Storage and Transport	D/S	A/T
3.4.4.2	(U) Relative Humidity	D/S	A/T
3.4.4.3	(U) Rain		
3.4.4.3.1	(U) Blowing Rain		
3.4.4.3.1.1	(U) Other than Storage and Transport	D/L/S	A/I/T
3.4.4.3.1.2	(U) Storage and Transport	L	A/T
3.4.4.3.2	(U) Dripping Rain		
3.4.4.3.2.1	(U) Other than Storage and Transport	D/L/S	A/T
3.4.4.3.2.2	(U) Storage and Transport	D/L	A/T
3.4.4.4	(U) Hail		
	(U) Other than Storage and Transport	L/S	A
3.4.4.4.1	(0) Office than Storage and Transport		• • •
3.4.4.4.2	(U) Storage and Transport	L	A

Verification: Verification D=Design D=Demonstr S=System T=Test L=Subsystem A=Analys				
D=Design S=System L=Subsystem D=Demonstr S=Test L=Subsystem D=Demonstr S=System L=Subsystem D=Inspection D=			Classes of	Method(s) of
Paragraph			1 50% N	
Paragraph Requirements Title			_	D=Demonstration
Paragraph Requirements Title O=Orbit I=Inspection			_	
3.4.4.5.1 (U) Other than Storage and Transport D/L/S A	MASSES			A=Analysis
3.4.4.5.2 (U) Storage and Transport D/L A				I=Inspection
3.4.4.6 (U) Salt Atmosphere D/L/S A/T 3.4.4.7 (U) Sand and Dust				
3.4.4.7.1 (U) Sand and Dust 3.4.4.7.1 (U) Other than Storage and Transport L			This is the	
3.4.4.7.1 (U) Other than Storage and Transport L A/T 3.4.4.7.2 (U) Storage and Transport D/L A/T 3.4.4.8 (U) Fungus L A 3.4.4.9 (U) Wind 3.4.4.9.1 (U) Other than Storage and Transport D/L/S A 3.4.4.9.1 (U) Survival Wind D/L/S A 3.4.4.9.2 (U) Storage and Transport D/L/S A 3.4.4.9.3 (U) Wind Turbulence 3.4.4.10 (U) Lightning S T 3.4.4.10.1 (U) Other than Airborne Equipment S T 3.4.4.10.2 (U) Airborne Equipment S T 3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5 (U) Induced Environments S 3.4.5.1 (U) Vibration S A/D 3.4.5.1 (U) Storage and Transport S A/D 3.4.5.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2 (U) Decontamination S 3.4.5.2 (U) Effectiveness D/L/S A/D/T 3.4.5.2 (U) Esposure D/L/S A/D/T 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Compatibility (EMC) L/S A/T 3.4.5.4.1 (U) Electromagnetic Compatibility (EMC) L/S A/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	12-14-14-14-14-14-14-14-14-14-14-14-14-14-		D/L/S	A/T
3.4.4.7.2 (U) Storage and Transport D/L A/T 3.4.4.8 (U) Fungus L A 3.4.4.9 (U) Wind 3.4.4.9.1 (U) Other than Storage and Transport L/S A/T 3.4.4.9.1.1 (U) Survival Wind D/L/S A 3.4.4.9.2 (U) Storage and Transport D/L/S A 3.4.4.9.3 (U) Wind Turbulence 3.4.4.9.3 (U) U Lightning 3.4.4.10.1 (U) Lightning 3.4.4.10.2 (U) Airborne Equipment S T 3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5 (U) Induced Environments 3.4.5.1 (U) Other than Storage and Transport S A/D 3.4.5.1.1 (U) Other than Storage and Transport D/L/S A/D/T 3.4.5.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2 (U) Decontamination 3.4.5.2 (U) Effectiveness D/L/S A/D/T 3.4.5.2 (U) Esposure D/L/S A/VT 3.4.5.2 (U) Esposure D/L/S A/VT 3.4.5.3 (U) Electrostatic Discharge (ESD) 3.4.5.3 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4 (U) Electromagnetic Compatibility (EMC) L/S A/T	THE RESERVE THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN COLUMN TWIND TWO IS NAMED IN COLUMN TWO IS NAMED IN COLUMN TWO IS NAMED IN	The state of the s		
3.4.4.8 (U) Fungus	3.4.4.7.1			
3.4.4.9	3.4.4.7.2	(U) Storage and Transport		A/T
3.4.4.9.1 (U) Other than Storage and Transport L/S A/T 3.4.4.9.1.1 (U) Survival Wind D/L/S A 3.4.4.9.2 (U) Storage and Transport D/L/S A 3.4.4.9.3 (U) Wind Turbulence UL/S A 3.4.4.10 (U) Lightning S T 3.4.4.10.1 (U) Other than Airborne Equipment S T 3.4.4.10.2 (U) Airborne Equipment S T 3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5 (U) Induced Environments S A/D 3.4.5.1 (U) Vibration S A/D 3.4.5.1.1 (U) Other than Storage and Transport S A/D 3.4.5.2.1 (U) Storage and Transport S A/D/T 3.4.5.2.2 (U) Nuclear, Biological, and Chemical D/L/S A/D/T 3.4.5.2.1.1 (U) Effectiveness D/L/S A 3.4.5.2.2 (U) Exposure D/L/S A/I/T <td>3.4.4.8</td> <td>(U) Fungus</td> <td>L</td> <td>Α</td>	3.4.4.8	(U) Fungus	L	Α
3.4.4.9.1.1 (U) Survival Wind D/L/S A 3.4.4.9.2 (U) Storage and Transport D/L/S A 3.4.4.9.3 (U) Wind Turbulence	3.4.4.9	(U) Wind		
3.4.4.9.2 (U) Storage and Transport D/L/S A 3.4.4.9.3 (U) Wind Turbulence 3.4.4.10 (U) Lightning 3.4.4.10.1 (U) Other than Airborne Equipment S T 3.4.4.10.2 (U) Airborne Equipment S T 3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5.1 (U) Induced Environments S A/D 3.4.5.1.1 (U) Other than Storage and Transport S A/D/T 3.4.5.1.2 (U) Storage and Transport S A/D/T 3.4.5.2.1 (U) Nuclear, Biological, and Chemical S A/D/T 3.4.5.2.1 (U) Decontamination D/L/S A 3.4.5.2.1.1 (U) Effectiveness D/L/S A/I/T 3.4.5.2.2 (U) Exposure D/L/S A/I/T 3.4.5.3.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.4.4 (U) Electromagnetic Environmental Effects (E3) A/D/T 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) El	3.4.4.9.1	(U) Other than Storage and Transport	L/S	A/T
3.4.4.9.3 (U) Wind Turbulence 3.4.4.10 (U) Lightning 3.4.4.10.1 (U) Other than Airborne Equipment S 3.4.4.10.2 (U) Airborne Equipment S 3.4.4.10.3 (U) Status Recovery S 3.4.4.10.4 (U) Lightning EMP D/S 3.4.5 (U) Induced Environments 3.4.5.1 (U) Vibration 3.4.5.1.1 (U) Other than Storage and Transport S 3.4.5.1.2 (U) Storage and Transport D/L/S 3.4.5.2.1 (U) Nuclear, Biological, and Chemical 3.4.5.2.1 (U) Decontamination 3.4.5.2.1.1 (U) Effectiveness 3.4.5.2.2.2 (U) Exposure D/L/S 3.4.5.3.3 (U) Personnel Protection L A 3.4.5.3.1 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) A/D/T 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	3.4.4.9.1.1		D/L/S	A
3.4.4.10 (U) Lightning 3.4.4.10.1 (U) Other than Airborne Equipment S 3.4.4.10.2 (U) Airborne Equipment S 3.4.4.10.3 (U) Status Recovery S 3.4.4.10.4 (U) Lightning EMP D/S 3.4.5 (U) Induced Environments 3.4.5.1 (U) Vibration 3.4.5.1.1 (U) Other than Storage and Transport S 3.4.5.1.2 (U) Storage and Transport D/L/S 3.4.5.2.1 (U) Nuclear, Biological, and Chemical 3.4.5.2.1 (U) Decontamination 3.4.5.2.1.1 (U) Effectiveness D/L/S 3.4.5.2.2 (U) Exposure D/L/S 3.4.5.3.3 (U) Personnel Protection L A 3.4.5.3.1 (U) Electrostatic Discharge (ESD) 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4.1 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.2 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	3.4.4.9.2	(U) Storage and Transport	D/L/S	A
3.4.4.10.1 (U) Other than Airborne Equipment S T 3.4.4.10.2 (U) Airborne Equipment S T 3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5.1 (U) Induced Environments S A/T 3.4.5.1 (U) Vibration S A/D 3.4.5.1.1 (U) Other than Storage and Transport S A/D/T 3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2.1 (U) Nuclear, Biological, and Chemical D/L/S A/D/T 3.4.5.2.1 (U) Decontamination D/L/S A 3.4.5.2.1.1 (U) Effectiveness D/L/S A/V 3.4.5.2.2 (U) Exposure D/L/S A/V 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) A.4.5.4 U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T </td <td>3.4.4.9.3</td> <td>(U) Wind Turbulence</td> <td></td> <td></td>	3.4.4.9.3	(U) Wind Turbulence		
3.4.4.10.2 (U) Airborne Equipment S T 3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5.1 (U) Induced Environments D/S A/T 3.4.5.1.1 (U) Vibration S A/D 3.4.5.1.2 (U) Other than Storage and Transport S A/D/T 3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2.1 (U) Decontamination D/L/S A/D/T 3.4.5.2.1.1 (U) Effectiveness D/L/S A/I/T 3.4.5.2.2 (U) Exposure D/L/S A/I/T 3.4.5.2.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) A/D/T 3.4.5.4.1 (U) Electromagnetic Compatibility (EMC) L/S A/D/T	3.4.4.10	(U) Lightning		
3.4.4.10.2 (U) Airborne Equipment S T 3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5.1 (U) Induced Environments D/S A/T 3.4.5.1.1 (U) Vibration S A/D 3.4.5.1.2 (U) Other than Storage and Transport S A/D/T 3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2.1 (U) Decontamination D/L/S A/D/T 3.4.5.2.1.1 (U) Effectiveness D/L/S A/I/T 3.4.5.2.2 (U) Exposure D/L/S A/I/T 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/D/T	3.4.4.10.1	(U) Other than Airborne Equipment	S	T
3.4.4.10.3 (U) Status Recovery S T 3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5 (U) Induced Environments S A/T 3.4.5.1 (U) Vibration S A/D 3.4.5.1.1 (U) Other than Storage and Transport S A/D/T 3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2.1 (U) Decontamination D/L/S A/D/T 3.4.5.2.1.1 (U) Effectiveness D/L/S A 3.4.5.2.2.2 (U) Exposure D/L/S A/I/T 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3.1 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4.1 (U) Electromagnetic Environmental Effects (E3) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	3.4.4.10.2		S	
3.4.4.10.4 (U) Lightning EMP D/S A/T 3.4.5 (U) Induced Environments 3.4.5.1 (U) Vibration S A/D 3.4.5.1.1 (U) Other than Storage and Transport S A/D 3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2 (U) Nuclear, Biological, and Chemical D/L/S A/D/T 3.4.5.2.1 (U) Decontamination D/L/S A 3.4.5.2.1.2 (U) Effectiveness D/L/S A/I/T 3.4.5.2.2 (U) Exposure D/L/S A/I/T 3.4.5.3.1 (U) Personnel Protection L A 3.4.5.3.1 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.4.1 (U) Electromagnetic Environmental Effects (E3) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T			S	Т
3.4.5 (U) Induced Environments 3.4.5.1 (U) Vibration 3.4.5.1.1 (U) Other than Storage and Transport S 3.4.5.1.2 (U) Storage and Transport D/L/S 3.4.5.2 (U) Nuclear, Biological, and Chemical 3.4.5.2.1 (U) Decontamination 3.4.5.2.1.1 (U) Effectiveness 3.4.5.2.2 (U) Exposure D/L/S 3.4.5.2.3 (U) Personnel Protection L 3.4.5.3 (U) Electrostatic Discharge (ESD) 3.4.5.3.1 (U) LRU ESD L 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S		· / R	D/S	A/T
3.4.5.1 (U) Vibration S A/D 3.4.5.1.1 (U) Other than Storage and Transport D/L/S A/D/T 3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2.1 (U) Nuclear, Biological, and Chemical D/L/S A 3.4.5.2.1 (U) Decontamination D/L/S A 3.4.5.2.1.2 (U) Effectiveness D/L/S A/I/T 3.4.5.2.2 (U) Exposure D/L/S A/I/T 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4.1 (U) Electromagnetic Environmental Effects (E3) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T				
3.4.5.1.1 (U) Other than Storage and Transport S A/D 3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2 (U) Nuclear, Biological, and Chemical 3.4.5.2.1 D/L/S A 3.4.5.2.1.1 (U) Decontamination D/L/S A 3.4.5.2.1.2 (U) Effectiveness D/L/S A 3.4.5.2.2 (U) Exposure D/L/S A/I/T 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3.1 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.4.1 (U) Electromagnetic Environmental Effects (E3) A/D/T 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T		(U) Vibration		
3.4.5.1.2 (U) Storage and Transport D/L/S A/D/T 3.4.5.2 (U) Nuclear, Biological, and Chemical 3.4.5.2.1 (U) Decontamination 3.4.5.2.1.1 (b)(3) 3.4.5.2.1.2 (U) Effectiveness D/L/S A 3.4.5.2.2 (U) Exposure D/L/S A/I/T 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3.1 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) Electromagnetic Environmental Effects (E3) A/T 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	3.4.5.1.1	(U) Other than Storage and Transport	S	A/D
3.4.5.2 (U) Nuclear, Biological, and Chemical 3.4.5.2.1 (U) Decontamination 3.4.5.2.1.2 (U) Effectiveness 3.4.5.2.2 (U) Exposure 3.4.5.2.3 (U) Personnel Protection 3.4.5.3 (U) Electrostatic Discharge (ESD) 3.4.5.3.1 (U) LRU ESD 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S	3.4.5.1.2		D/L/S	A/D/T
3.4.5.2.1 (U) Decontamination 3.4.5.2.1.1 (b)(3) 3.4.5.2.1.2 (U) Effectiveness D/L/S A 3.4.5.2.2 (U) Exposure D/L/S A/L/T 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) C A/D/T 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	3.4.5.2			
3.4.5.2.1.1 (b)(3) 3.4.5.2.1.2 (U) Effectiveness D/L/S A 3.4.5.2.2 (U) Exposure D/L/S A/VT 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) C A/D/T 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T				
3.4.5.2.1.2 (U) Effectiveness D/L/S A 3.4.5.2.2 (U) Exposure D/L/S A/VT 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) O A/D/T 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T				
3.4.5.2.2 (U) Exposure D/L/S A/VT 3.4.5.2.3 (U) Personnel Protection L A 3.4.5.3 (U) Electrostatic Discharge (ESD) L A/T 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	THE RESIDENCE OF THE PARTY OF T	(U) Effectiveness	D/L/S	Α
3.4.5.2.3 (U) Personnel Protection 3.4.5.3 (U) Electrostatic Discharge (ESD) 3.4.5.3.1 (U) LRU ESD 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Interference (EMI) 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L A/T A/T				
3.4.5.3 (U) Electrostatic Discharge (ESD) 3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T				944 CREATER OF
3.4.5.3.1 (U) LRU ESD L A/T 3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T				
3.4.5.4 (U) Electromagnetic Environmental Effects (E3) 3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T		ř	L	A/T
3.4.5.4.1 (U) Electromagnetic Interference (EMI) O A/D/T 3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T	ELLIG TEMPOR THAN ACTOR		~	
3.4.5.4.2 (U) Electromagnetic Compatibility (EMC) L/S A/T			0	A/D/T
		<u> </u>	1975	
3.4.5.6 (U) Ordnance			2,0	1201
3.4.5.6.1 (U) Safe Rendering L I			r.	T
3.4.5.6.2 (U) Inadvertent Ignition S/D T/I				
3.4.5.7 (b)(3)			3,17	1/1
3.5 (U) Standardization and Commonality				

		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
		L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3.5.1	(U) Vehicles, Shelters, and Trailers	L	A/D
3.5.2	(U) Lifting and Handling Equipment	L	A/D
3.6	(U) Interoperability	D/S	A/D
3.6.1	(U) Global Positioning System (GPS)	S	D
3.6.2	(U) Internet Protocol	S	D
3.6.3	(U) External BM/C4I Interface	L	D
3.6.4	(U) C4ISR Architectures	L/O/S	D/T
3.6.5	(U) Secondary Data Dissemination	L/S	D/T
3.6.6	(U) Network Degradation	L/O/S	D/T
3.6.7	(U) Communication and Data Interfaces	L/S	D/T
	Implementation		
3.6.8	(U) Extensible Markup Language (XML) Interface	L/S	D/T
3.6.9	(U) Tactical Data Information Link J (TADIL		
	J)/Link 16		
3.6.9.1	(U) Link 16 Participants	L/S	D/T
3.6.9.2	(U) Joint Range Extension Application Protocol	L/S	D/T
	Participants		
3.6.9.3	(U) Aerial Data Type	L/O/S	D/T
3.6.9.4	(U) SMT Data Type	L/O/S	D/T
3.6.9.5	(U) Receive Data Type	L/S	D/T
3.6.9.6	(U) Aerial Engagement Support Data	S	D/T
3.6.9.7	(U) Receive Fire Control Support Engagement	S	D/T
	Information		
3.6.9.8	(U) Provide Fire Control Support Engagement	S	D/T
	Information		
3.6.9.9	(U) Provide CID Support Data	L/O/S	D/T
3.6.9.10	(U) Provide Operational Status and Change	L/S	D/T
	Information		
3.6.10	(U) Cooperative Engagement Capability (CEC)		
3.6.10.1	(U) CEC Participation	L/O/S	T
3.6.10.2	(U) Provide Aerial Data Type	L/O/S	Т
3.6.10.3	(U) Receive Aerial Data Type	L/O/S	D/T
3.6.10.4	(U) Aerial Engagement Support Data	S	D/T
3.6.10.5	(U) Provide CID Support Data	L/S	D/T
3.6.10.6	(U) Provide Operational Status and Change	L/S	D/T
	Information		
3.6.11	(U) Integrated Broadcast Service (IBS)		
3.6.11.1	(U) Provide Aerial Data Type	L/S	D/T
	A Company of the Comp		

		Classes of	34-4-34-1-6
		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
Davagranh	Requirements Title	L=Subsystem O=Orbit	A=Analysis
Paragraph 3.6.11.2	(U) Provide SMT Data Type	L/S	I=Inspection D/T
3.6.11.2	(U) Receive Aerial Data Type	L/S	D/T
3.6.11.4	(U) Receive Aerial Data Type	L/S	D/T
			D/T
3.6.11.5	(U) Receive Fire Control Support Engagement Information	L/S	1000
3.6.11.6	(U) Provide Fire Control Support Engagement	S	D/T
	Information		
3.6.11.7	(U) Provide TBM and LCR LPE	L/O/S	D/T
3.6.12	(U) Army Battle Command System (ABCS)		
3.6.12.1	(U) Provide SMT Data Type	L/S	D/T
3.6.12.2	(U) Provide Operational Status and Change	L/S	D/T
	Information		
3.6.12.3	(U) Provide Aerial Data Type	L/S	D/T
3.7	(U) Identification Friend or Foe		
3.7.1	(U) IFF Range	L/S	A/T
3.7.2	(U) IFF Interrogator Modes	D/L/S	D/I/T
3.7.3	(U) IFF Transponder Modes	D/L/S	D/I/T
3.8	(U) GPS Compliance	D	Ţ
3.9	(U) Precise Participant Location and Identification	S	Τ
	(PPLI)		
3.10	(b)(3)		
3.11	(U) Movement		
3.11.1	(U) Rail Transportation	L	A/T
3.11.1.1	(U) Rail Transportation Tunnel	L	A
3.11.1.2	(U) Rail Transport Vibration	l	A
3.11.2	(U) Land Transportation		
3.11.2.1	(U) Highway Transportation	L	A
3.11.2.2	(U) Secondary Road Transportation	L	A/T
3.11.2.3	(U) Unimproved Road Transportation	L	A/T
3.11.2.4	(U) Off-road Transportation	L	A/Ţ
3.11.2.5	(U) Large Assembly Transport Vibration	L	A/T
3.11.3	(U) Sea Transportation	D/L	A
3.11.3.1	(U) Sea Transportation Vibration	D/L	A
3.11.4	(U) Air Transportation	L	I
3.11.4.1	(U) Air Transport Vibration	D/L	Α
3.11.5	(U) Transportation Packaging	L	I

		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
		L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3.11.6	(U) Transportation Performance-oriented	D/L	A/I
	Packaging		
3.11.7	(U) Shock		
3.11.7.1	(U) Functional Shock	S	A/D
3.11.7.2	(U) Rail Shock	S	A/T
3.11.7.3	(U) Packaged LRU Drop	D/L	A/T
3.11.7.4	(U) Transit Drop		
3.11.7.4.1	(U) Transit Edge Drop	D/L/S	A/T
3.11.7.4.2	(U) Transit Flat Drop	D/L/S	A/T
3.11.7.4.3	(U) Transit Flat Drop for Fragile Hardware	D/L	A/I
3.11.7.4.3.1	(U) Transit Shock Indicators for Fragile Hardware	D/L/S	A/T
3.11.7.4.3.2	(U) Container Handling for Fragile Hardware	D/L	A/I
3.11.7.4.3.3	(U) Fixture Handling for Fragile Hardware	D/L	A/I
3.11.7.5	(U) Transport and Handling Vehicles	L/S	A/D
3.11.8	(U) March Order and Emplacement	L/O	100
3.11.8.1	(U) Emplacement Time	S	A/D
3.11.8.2	(U) March Order Time	S	A/D
3.11.9	(U) Location, Position, and Alignment	3	ND
	· • · · · · · · · · · · · · · · · · · ·	- 10	
3.11.9.1	(U) Inertial Navigation System	L/S	A/D/I/T
3.11.9.2	(U) GPS (b)(3)	L	I
3.12	(U) Reliability, Availability, and Maintainability		
3.12.1	(b)(3)		
2.12.2	(b)(3)		
3.12.2	(b)(3)		
3.12.3			
3.12.4	(b)(3)		
3.13	(U) Fault Detection and Isolation	T /0	72/87
3.13.1	(U) Monitoring	L/S	D/T
3.13.2	(U) Status Reporting to the Operator	S	D/T
3.13.3	(U) Fault Storage	S	1
3.13.4	(U) Failure Detection and Isolation	S	A/D
3.13.5	(U) BIT/BITE Operational Impact	L/S	A/D/T
3.13.6	(U) Fault Detection and Isolation	L/S	A/D
3.13.7	(U) BIT/BITE False Alarm Rate	L/S	Α
3.13.8	(U) Prognostic Incorporation	L/S	A/T
3.13.9	(U) Prognostic Performance	L/S	A/T
3.13.10	(U) Prognostic Data	L	D/I

		Classes of	Method(s) of
			Vanifications
		Verification:	Verification: D=Demonstration
		D=Design	T=Test
		S=System L=Subsystem	A=Analysis
Dorgoronh	Requirements Title	O=Orbit	I=Inspection
Paragraph 3.13.11		L/S	A
	(U) BIT/BITE Circuitry Isolation		A/T
3.13.12	(U) Failure Degradation	L	AV I
3.14	(U) Logistics	7.10	D/I
3.14.1	(U) Standard Test Equipment	L/S	D/I
3.14.2	(U) Non-standard Test Equipment	D	I
3.14.3	(U) Supply	S	l l
3.14.4	(U) Maintenance Concept	0	I
3.14.5	(U) Preventive Maintenance Checks and Services (PMCS)		
3.14.5.1	(U) Scheduled System Maintenance	S	A/D
3.14.5.2	(U) Aerostat Retrieval Cycle	S	A/D
3.14.6	(U) Supply Support Concept	S	Ĭ
3.14.7	(U) Helium Quantity	0	A
3.14.8	(U) Unique Identification	L	Ĭ
3.15	(U) Safety	D/L/S	A/D/I/T
3.15.1	(U) Mishap Risk Values	S	A/D/I/T
3.15.2	(U) Noise	S	A/J/T
3.16	(U) Survivability		
3.16.1	(b)(3)		
3.16.2	(b)(3)		
3.16.3	(U) Distinctive Characteristics	S	I
3.17	(U) Computer Hardware / Software	L	I
3.17.1	(U) Uninterruptible Power Source (UPS)	L	D
3.17.2	(U) Data Processing Reserve Capacity	L	A/T
3.17.3	(U) Signal Processing Reserve Capacity		9. Star 10. 100
3.17.4	(U) Removable Storage Media	L	D
3.17.5	(b)(3)		
3.18	(U) Power		
3.18.1	(U) U.S. Prime Power	S	A/T
3.18.2	(U) Alternate Power	S	T/I
3.18.3	(U) Automatic Power Switching	S	D/I
3.18.4	(U) Manual Power Switching	L/S	A/D
3.18.5	(U) Foreign Prime Power		
3.19	(U) Other Modes	L/S	1/T
3.20	(U) Modularity	D	A/I
3.21	(U) Information Assurance	D/S	A/D/I/T
3.21.1	(U) Classified and Unclassified Information	L/S	A/D/L/T
3.21.2	(U) Process Approval	D/L/S	D/I/T

_	I	Classes of	Mathadalalaf
		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
, ,	7	L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3.21.3	(b)(3)		16.24
3.22	(U) Human Engineering	S	D/I A/D/I
3.22.2	(U) Anthropometrics	L/S	A/D/T
3.22.2	(U) Environmental Control Systems (U) Human-To-Machine Interfaces	D	A/D/T
3.22.4		L L	I
The Contract of the Contract o	(U) Symbology	L	1
3.23	(b)(3)		
	(U) EO/IR Surveillance Range		, su
3.23.2	(U) EO/IR Azimuth Coverage		
3.23.3	(U) EO/IR System Control		
3.24	(U) Platform		
3.24.1	(U) Interchangeability	S	D
3.24.2	(b)(3)		
3.24.3	(U) Visual Flight Rules	L	D/ <u>I/</u> T
3.24.4	(U) Instrumented Flight Rules	L	D/I
3.24.5	(U) Tether	L	D/I
3.25	(U) Air Vehicle	S	A/D
3.25.1	(b)(3)		
3.25.2	(U) Strobe Light	L	D
3.26	(U) Ground Support Equipment (GSE)		
3.26.1	(U) Meteorological Monitoring	L	D/I
3.26.1.1	(U) Meteorological Monitoring Range	L	A
3.26.1.2	(U) Weather Display	<u>S</u>	D
3.26.2	(U) Flight Directors Station	L	I
3.27	(U) Fire Control System		
3.27.1	(U) USMCEB Certification	D/L	Α
3.27.2	(U) Operational Bandwidth	L	T
3.27.3	(U) Fire Control System ABT Loading		
3.27.3.1	(b)(3)		
3.27.3.2	(U) Stressing Target Loading Scenario	L	A/T
3.27.3.3	(U) Surveillance Target Loading	L L	A/T
3.27.3.4	$(\mathfrak{h})(3)$	·	
3.27.3.4.1	(b)(3)		
3.27.3.4.2	(b)(3)		
3.27.4	(U) Fire Control Radar Operational Functions	L/S	T
3.27.4.1	(U) Interleaving	L/S	D/T
3.27.4.2	(U) Air Breathing Target Function		
3.27.4.2.1	(U) Function Priorities	L/S	D/T
	The state of the s		60.05

		7	
		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
		L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3.27.4.2.2	(b)(3)		
3.27.4.2.3	(b)(3)		
3.27.4.2.4	(b)(3)	~	T.
3.27.5	(U) Fire Control Cues (b)(3)	S	Ţ
3.27.6			
3.27.6.1	(b)(3)		
3.27.6.2	(U) Cued SLAMRAAM Engagement Range	0	A/T
3.27.6.3	(b)(3)		
3.27.7	(b)(3)		
3.27.7.1	(b)(3)		
3.27.7.2	(U) Stand Alone SLAMRAAM Engagement	S	A/T
3.27.7.2	Range		12.
3.27.7.3	(b)(3)		
3.27.8	(U) Instrumented Range	L/S	D/A/T
3.27.9	(U) ABT Target Tracking	L	A/T
3.27.9.1	(U) ABT Target Discrimination	S	A/T
3.27.10	(U) Transition to Track	L	D/T
3.27.11	(b)(3)	2	27.1
3.27.12	(U) SLAMRAAM Accuracy	S	Α⁄Τ
3.27.13	(b)(3)	5	791
3.27.14	(b)(3)		
3.27.14.1	(U) Update Rate	L/S	A/T
3.27.14.2	(U) Range and Azimuth Accuracy	L/S	A/T
3.27.14.3	(U) Relative Position Accuracy	L/S	A/T
3.27.14.4	(U) Target Altitude Accuracy	L/S	A/T
3.27.15	(U) Sectored Surveillance	E/O	INI
3.27.15.1	(U) Sectored Surveillance Azimuth Coverage	L/S	D/T
3.27.15.2	(U) Instrumented Range	1./3	D/ 1
3.27.15.3	(U) Sectored Surveillance Range	+	
3.27.15.3.1			
3.27.13.3.1	(b)(3)		
3.27.15.3.2	(b)(3)		
2 27 15 4		Ţ	תיים ו
3.27.15.4	(U) Track Initiation	L	D/T
3.27.15.5	(U) ABT False Tracks	L/S	A/T
3.27.16	(U) SMT Function	L/S	A/D
3.27.16.1	(U) SMT Surveillance Azimuth Coverage	L/S	D/T

	T		Mathad(a) af
		Classes of	Method(s) of Verification:
		Verification:	D=Demonstration
		D=Design	T=Test
		S=System	
D	Danismanta Tida	L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3.27.16.2	(U) SMT Target Loading	L/S	D/T
3.27.16.3	(U) SMT Target Location Error	L/S	A/T
3.27.16.4	(U) SMT Track Initiation	L/S	D/T
3.27.16.5	(U) SMT Number of False Tracks	L/S	A/T
3.27.16.6	(U) SMT Detection Range	L/S	A/T
3.27.16.7	(U) SMT Target Discrimination	L/S	A/T
3.27.17	(U) TBM Function	L/S	A/T
3.27.17.1	(U) TBM Surveillance Azimuth Coverage	L/S	D/T
3.27.17.2	(U) Elevation Coverage	L/S	A/T
3.27.17.3	(U) Launch Point Estimate	L/S	A/T
3.27.18	(U) LCR Function	L/S	A/T
3.27.18.1	(U) LCR Surveillance Azimuth Coverage	L/S	A/T
3.27.18.2	(U) Elevation Coverage	L/S	A/T
3.27.18.3	(U) Launch Point Estimate	L/S	A/T
3.27.19	(b)(3)	_	
3.27.20	(b)(3)		
3.27.21	(b)(3)		
3.27.22	(U) Range Resolution	L	A
3.27.23	(U) Discrimination		
3.27.24	(U) CID Technique 1	S	D
3.27.25	(U) CID Technique 2	S	D
3.27.26	(U) CID Technique 3	S	D
3.27.27	(U) Clutter Tracks	S	D
3.27.28	(b)(3)		
3.27.29	(b)(3)		
Test County of Delegation	(1)(3)		
3.28	(U) Processing Station.	L	I
3.28.1	(U) Interchangeability	О	I
3.28.2	(U) Operator Station(s)		
3.28.2.1	(U) System Initialization	L/S	D/T
3.28.2.2	(U) Automation	S	D
3.28.2.3	(U) Location Systems	L	D
3.28.2.4	(U) Terrain Analysis	L/S	D/T
3.28.2.5	(U) Mission Control	L/S	D/T
3.28.2.6	(U) Tasking Responses	L/S	D/T
3.28.2.7	(U) Operator Actions	L/S	D/1
		S	D
3.28.2.8	(U) Target Designation	s	<u> </u>

	_		
		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
		L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3.28.2.9	(U) Integrated Data Management Environment	L	D/I
3.28.3	(U) Embedded Training	L	D/I
3.28.3.1	(U) Simulated Conditions	L	D/I
3.28.3.2	(U) Individual Training	L	D
3.28.3.3	(U) Team Training	L	D
3.28.3.4	(U) Unit Training	L	D
3.28.3.5	(U) Web-based Training	L/S	D/I
3.28.3.6	(U) Growth	D	A/D
3.28.3.7	(U) Distributed Interactive Simulation	L/S	D/T
3.28.3.8	(U) Joint Semi-Automated Forces (JSAF)	L/S	D/T
3.28.3.9	(U) High Level Architecture	L/S	D/T
3.28.3.10	(U) Common Training	L	D
3.29	(U) Communications		
3.29.1	(U) Interface Panel	L	I/T
3.29.2	(U) Message Format	L	D
3.29.3	(U) Text Formatted Messages	L	D/I
3.29.4	(U) Air and Missile Defense Planning and Control		7-171
3.2311	Station		
3.29.5	(U) Voice Communications	L	T
3.29.6	(U) Combat Net Radio	L	T
3.29.7	(U) Tactical Voice Communications	L	T
3.29.8	(U) Commercial Voice Communications	L	T
3.29.9	(U) Defense Switched Network	L	Ť
3.29.10	(U) Integrated Services Digital Network	L	T
3.29.11	(U) Air and Missile Defense Workstation	L	D/T
3.30	(U) Data Recording	L/S	A/D/T
3.30.1	(U) Data Recording Impacts	L/S	A/D/T
3.30.2	(U) Data Recording Control	L/S	D
3.30.3	(U) Data Storage Devices	D D	I
3.30.4	(U) Media Changeover	D	I
3.30.4	(U) Selective Data Retrieval	L	D
3.30.6		L	D
	(U) Interactive Operator Interface	L	ע
3.30.7	(U) Data Recording Duration		
3.30.7.1	(b)(3)	Y /6	A /TD //TD
3.30.7.2	(U) Mission Data Recording Duration	L/S	A/D/T
3.30.7.3	(U) Voice Recording Duration	L	D
3.30.7.4	(U) Video Recording Duration	S	D D
3.30.7.5	(U) Weather Data Recording Duration	L/S	D/T

		Classes of	Method(s) of
		Verification:	Verification:
		D=Design	D=Demonstration
		S=System	T=Test
		L=Subsystem	A=Analysis
Paragraph	Requirements Title	O=Orbit	I=Inspection
3.30.7.6	(U) Video Data Playback	S	D
3.30.7.7	(U) Voice Playback	L	D
3.31	(U) Surveillance System	89.5	
3.31.1	(U) Air Breathing Target (ABT) Function	L/S	A/T
3.31.2	(U) Azimuth Coverage	L/S	D/T
3.31.3	(U) Elevation Coverage	L/S	D/T
3.31.4	(U) Field of Regard	L	A/T
3.31.5	(U) Cueing Range	L/S	A/T
3.31.6	(U) Surveillance System Target Track Loading	L	A/T
3.31.6.1	(U) Stressing Target Load	L	A/T
3.31.6.2	(U) Saturation Alleviation	L/S	D/T
3.31.7	(U) Stressing Target Cue	L/S	A/D/T
3.31.8	(U) Instrumented Range	L/S	D/T
3.31.9	(U) Track Initiation	S	D/T
3.31.10	(U) Air Breathing Target Detection Range	L/S	A/T
3.31.11	(U) False Tracks	L/S	D
3.31.12	(U) Emission Controls	L/S	D/T
3.31.12.1	(U) Sector Blanking Control	L/S	D/T
3.31.12.2	(U) ERP Control	L	T
3.31.13	(U) Combat ID Support	L/S	D/T
3.31.13.1	(U) Surface/Air Declaration	S	A/D
3.31.13.2	(U) Surface/Air Declaration Accuracy	S	A/D
3.31.14	(U) TBM Function	S	A/T
3.31.14.3	(U) Surveillance Coverage	L/S	D/T
3.31.14.2	(U) Elevation Coverage	L/S	A/T
3.31.14.3	(U) Launch Point Estimate	L/S	A/D/T
3.31.15	(U) LCR Function	L/S	A/D/T
3.31.15.1	(U) Surveillance Coverage	L/S	D/T
3.31.15.2	(U) Elevation Coverage	L/S	A/D/T
3.31.15.3	(U) Launch Point Estimate	L/S	A/D/T
3.31.16	(U) SMT Function.	L/S	A/T
3.31.16.1	(U) Target Load	L/S	T
3.31.16.2	(U) Detection Range	L/S	A/T
3.31.16.3	(U) Track Initiation	S	T
3.31.16.4	(U) False Tracks	L/S	D/T
3.31.17	(U) USMCEB Certification	D/L	A/T
3.31.18	(U) Clutter Tracks	S	D

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

5 (U) Packaging

Defined in transportation requirements.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

- 6 (U) Notes
- 6.1 (U) Intended Use
- 6.2 (U) Glossary Definitions



- (U) Aerostat A semi-rigid aerodynamic structure filled with helium that is tethered to the ground. An aircraft that embodies one or more containers filled with a gas lighter than air and that is supported chiefly by buoyancy derived from the surrounding air. An aerostat is tethered, which distinguishes it from an airship.
- (U) Air Breathing Threats (ABT) ABTs include cruise missiles, fixed wing aircrafts, rotary wing aircraft (helicopters), unmanned combat aerial vehicles and unmanned aerial vehicles.
- (U) Air and Missile Defense Workstation (AMDWS) AMDWS is the primary tool for monitoring and managing AMD operations. It receives air situational awareness from the ADSI, ground situation and intelligence information from the maneuver control system (MCS), all source analysis system remote workstations (ASAS RWS), and other sources. The AMDWS maintains a comprehensive database of the tactical situation and provides mission-planning capabilities.



- (U) Altitude The vertical distance of a level, a point or an object considered as a point, measured from mean sea level.
- (U) Battle Management (BMDO C2 Plan) The automated responses to command and control system control directives: combinations or fusion of data from different sensors; automated sensor and weapon tasking; and preparation for summaries for performance assessment.

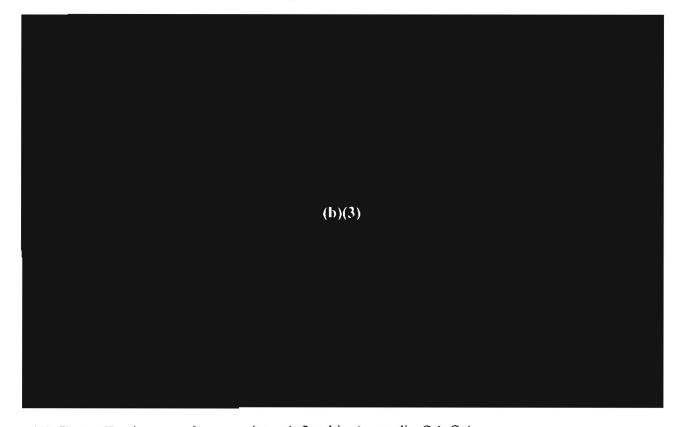
(b)(1)

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

(b)(1)

(U) Classification: The process of determining the type of platform represented in a track through an analysis of target characteristics. (USAADASCH) - The categorization of detected entities according to type. (1) manned versus unmanned; (2) fixed-wing versus rotary-wing; (3)

(b)(3) Target classification does not address the intent of the detected entities. See target identification.



- (U) Clutter Track a track on any item defined in Appendix C.1-C.4.
- (U) Combat Gear Includes the following: Army Combat Uniform (ACU) with combat boots, Army Combat Helmet (ACU), M-40 Protective Mask with carrier, Interceptor Body Armor (IBA) with plates, Load Bearing Vest (LBV), and Individual weapon (on person or nearby) which is currently M-16A2, M-4, M-249, M-203, or M-9 pistol.
- (U) Command and Control The exercise of authority and direction by a properly designated commander over assigned forces in the accomplishment of the mission. Command and control functions are performed through an arrangement of personnel, equipment, communications, facilities and procedures employed by a commander in planning, directing, coordinating and controlling forces and operations in the accomplishment of the mission.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

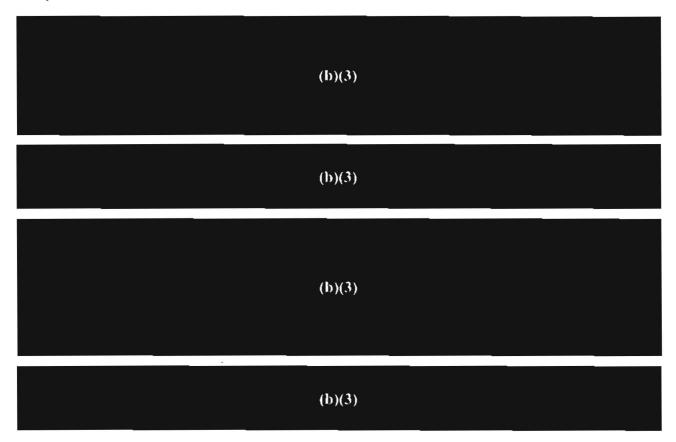
- (U) Command, Control, Communications, Computers and Intelligence (C4I) (JP 3-01.5) C4I is the systems used to coordinate and integrate the joint force capabilities to conduct and link passive defense, active defense, and attack operations. It includes missile warning and cueing of defense systems by missile warning sensors and ground stations. C4I provides command authorities at all levels with timely and accurate data and systems to plan, monitor, direct, control and report TAMD operations.
- (U) Communications Connectivity –The degree to which communications can be maintained up and down the chain of command and horizontally. Descriptors: Continuous (operates with almost no interruptions); Intermittent (some interruptions will occur); Periodic (only operates periodically); Comm Out.
- (U) CONOPS. CONOPS is a description of the desired system characteristics from an operational point of view. It is used to coordinate the overall non-quantitative system goals with the user(s), the buyer, the contractor(s), and other interfacing systems and organizations.
- (U) Conventional Aircraft: Manned aircraft that exhibit (b)(3)
- (U) Critical System Characteristics Design features that drive program cost and risk and determine how well the system will function in its intended operational environment. They include

 (b)(3)
- (U) Cruise Missile (CM) A guided missile whose flight path to its target is conducted at approximately constant velocity; depends on the dynamic reaction of the air for lift and upon propulsion forces to overcome drag and move along the flight path. (b)(3) Pilotless, non-recoverable guided vehicles, using propulsion and aerodynamic lift during all or nearly all of their flight, and whose primary mission is to place ordnance or special payloads on a target.
- (U) Cue Quality data: Surveillance System target state vector and covariance data within the handover accuracy requirements that are provided in time for the Fire Control System to search and acquire the target within the within a (b)(3) probability of contour of Fire Control cue acquisition.



(U) Data Types: Data Types include: Initialization parameters, changed parameters, operator interventions, external messages, track data, status, CID-related products, operator actions/interventions, (b)(3) organic weather data.

- (U) Degrade. To make inferior to the normal condition, to damage. A general term that denotes a reduction in inherent capabilities compared to those of the undegraded normal condition.
- (U) Detection The process of detecting the presence and location of a target in sufficient detail to initiate a track without any a priori knowledge of the target.
- (U) Discrimination The process of identifying a track as either aerial or surface.
- (U) Doctrine (FM 3-0) Doctrine is the concise expression of how Army forces contribute to unified action in campaigns, major operations, battles, and engagements. While it complements joint doctrine, Army doctrine also describes the Army's approach and contributions to full spectrum operation on land. Doctrine represents consensus on how the Army conducts operations today. Doctrine ranges from tactics, techniques, and procedures (TPP) to doctrinal principles contained in FM 3-0, Operations. Doctrinal field manuals (FMs) and Army contributions to joint publications are derived from Army guidance and validated assessment results. Where conflicts between Army and joint doctrine arise, joint doctrine takes precedence. (TRADOC Pam 71-9) Body of thought composed of the fundamental principles by which military forces guide their actions in support of national objectives. It represents consensus on how the Army conducts operation today. It ranges from TTP to doctrine principles (such as FM 3-0).



MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009



- (U) External Sources (sensors). Non-organic Sensors that provides cueing data to the JLENS System.
- (U) Field of Regard (FOR). The azimuth and elevation extent within which a JLENS can detect and track a target.



(U) Fire-Control Sensor – Advanced airborne sensors capable of high-precision target tracking, identification, and interceptor missile in-flight control.



(U) Function: The system may execute several functions, possibly simultaneously, while in a given mode.



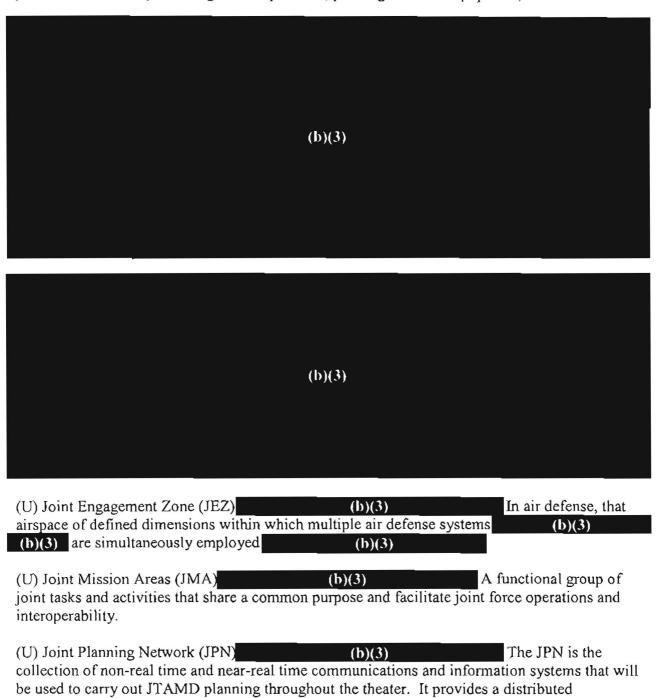
(U) Horizon – (JP 1-02) – In general, the apparent or visible junction of the Earth and sky, as seen from any specific position. Other terms called the apparent, visible, or local horizon. A

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

horizontal plane passing through a point of vision or perspective center. The apparent or visible horizon approximates the true horizon only when the point of vision is very close to sea level.


- (U) Identification (b)(3) The process of determining the friendly or hostile character of an unknown detected contact. (b)(3) The process (es) of determining that an unknown detected object is friendly, neutral, hostile, or unknown, or the result of those processes.
- (U) Information used in an identification process that contributes to the determination of identity (friendly, hostile, neutral) of a detected object. Indicators may be any or all of outputs from (b)(3) devices, intelligence-sourced data, radar measurement data, flight / trajectory characteristics, and / or other information which contributes to an identification determination.
- (U) Instrumented Radar Range (b)(3) The range over which a radarscope or monitor permits the display of targets. Any detections outside this range will not be displayed, but will still be processed for target range determination and for assessing whether or not to display the target on the scope or monitor.
- (U) Integrated Broadcast Service An integrated intelligence broadcast network, which in theater, is planned to subsume TIBS.
- (U) Internal sources(sensors). Sensors that are part of the JLENS Orbit.
- (U) Interoperability (b)(3) The ability of systems, units, or forces to provide services to and accept services from other systems, units, or forces and to use the services so exchanged to enable them to operate effectively together. (2) (DoD) The condition achieved among communications-electronics systems or items of communications-electronics equipment when information or services can be exchanged directly and satisfactorily between them and / or their users. The degree of interoperability should be defined when referring to specific cases. (3) (AR 71-9) Interoperability of a tactical automated system is the ability of two or more systems to directly exchange and process data.
- (U) ISO Shelters Army ISO Shelters are available in three distinct models (Non-Expandable, One-Side Expandable, and Two-Side Expandable) that all conform to the ISO container standards and have exterior dimensions of 8' x 8' x 19'11" when in their transportation mode. Army ISO shelters are compatible with military and commercial handling equipment and can be transported by all modes of transportation including cargo container ships, C-130, C-141, C-5, and C-17 military aircraft, trucks, trailers, and the M1022A1 ISO Dolly Set.
- (U) Jam-resistant: The confidentiality, integrity, availability, authentication, and non-repudiation of information and information systems, along with EMI, COMSEC, and TRANSEC safeguards as applied to information systems.

- (U) JLENS Orbit: All equipment necessary to meet the requirements of the JLENS Performance Specification, which include both Surveillance system and Fire control system and all individual supporting prime items.
- (U) JLENS System: The JLENS Orbit is architecture into two independently operated systems: Surveillance System and Fire Control System. A system also include all associated supporting prime items such as processing station, platform, power generation equipment, etc.



MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

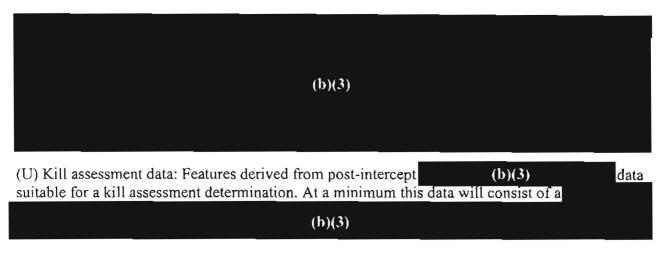collaborative planning capability, automated decision aids, and a means for distributing plans within theater. The core of the JPN is the Global Command and Control System (GCCS) operating in the Global Information Grid (GIG). The Joint Defense Planner (JDP), available within the Theater Battle Management Core Systems (TBMCS) portion of GCCS, is being developed to provide for JTAMD planning in theater.



- (U) Kill assessment support: Collection and reporting of kill assessment data.
- (U) Kill assessment: Ability to provide timely and accurate assessment of aerial target (b)(3)
- (U) Land Attack Cruise Missile (LACM) (DSB) Broadly defined, "encompassing" all unmanned aerodynamic platforms which can perform in a land attack role. The term includes platforms that can carry sensors for reconnaissance, surveillance, and targeting as well as lethal payloads. It includes attack and RSTA UAVs, remotely piloted vehicles (RPV), drones as well as anti-radiation missiles (ARM), and systems designated as cruise missiles. The systems can be fired from fixed or mobile land launchers, aircraft, ships, or submarines.
- (U) Large Caliber Rocket (LCR) (b)(3) An unguided, surface-launched, indirect fire rocket that can be fired from a single or multiple launch platform, and has a diameter of (b)(3) or greater and a range of at least (b)(3)
- (U) Line-of-Sight (LOS) (b)(3) The unobstructed path from a soldier, weapon, weapon sight, electronic sending and receiving antennas, or piece of reconnaissance equipment from one point to another. (See also intervisibility.)
- (U) Littoral (From the Sea, the Navy Operational Concept 3/97) Those areas adjacent to the oceans and seas that are within direct control of and vulnerable to the striking power of sea-based forces.
- (U) Low (b)(3) A height between five hundred and two thousand feet.

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

(U) Low Level Flight – a.k.a. terrain flight / nap-of-the-earth flight (JP 1-02) - Flight close to the Earth's surface during which airspeed, height and / or altitude are adapted to the contours and cover of the ground in order to avoid enemy detection and fire.

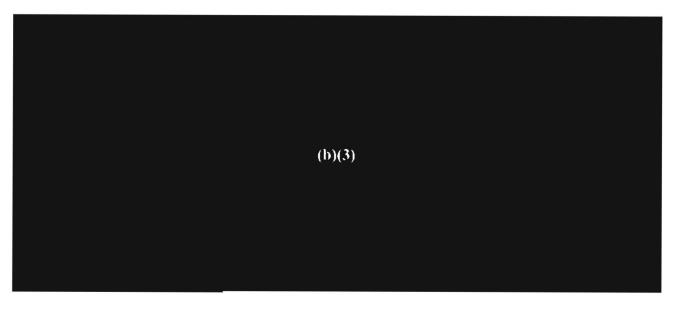
(b)(3)

(b)(1)

- (U) Manlift Work platform, either scissors lift or boom lift (cherry picker).
- (U) March Order. Consists of all of the actions needed to prepare the system to move, under its own power, from its current location to a new location. The locations may be employment sites or Ports of Departure (PODs). March Order begins when the system commander acknowledges receipt of the order to prepare to move; and ends when the last vehicle crosses the start point (SP) designated in the order. (Note: If no SP is provided in the order, then March Order ends when the last vehicle reports ready to move).

(b)(3)


- (U) Mission: The primary activity for the system. In the case of JLENS, the defined missions are associated with supporting defense against a specie set of threats LACMs and ABTs; TBMs and LCRs; or SMTs.
- (U) Mode: A second-level defined descriptive system status. The system may be in multiple modes simultaneously.
- (U) Near Lightning Strike A discharge of atmospheric electricity from one cloud to another or between a cloud and the earth that is greater than 1 km from the equipment and does not directly impact (strike) equipment but transfers energy to that equipment thru a third medium (air, ground, water, etc).
- (U) Node An entity in an organization or command that performs a specific set of management / supervisor / operational functions which can be decomposed. In network topology, a terminal of any branch of a network or a terminal common to two or more branches of a network.
- (U) Node/C4 Node (JP 1-02) The physical and functional grouping of communications and computer systems that provide terminating, switching, and gateway access services to support information exchange.
- (U) Non Line-of-Sight (NLOS) Target is not visible (masked) to the radar due to intervening terrain features, depressions, etc.
- (U) Off Road Surface Consist of a moderately smooth surface made up of small rocks, sand, dirt, and chert, and may have some potholes approximately 6 inches deep.



- (U) Payload The load which the aerostat is designed to lift to an operation altitude under specified conditions of operation.
- (U) PDETT: Probability of detection, evaluation, transfer, and track.

(b)(3)

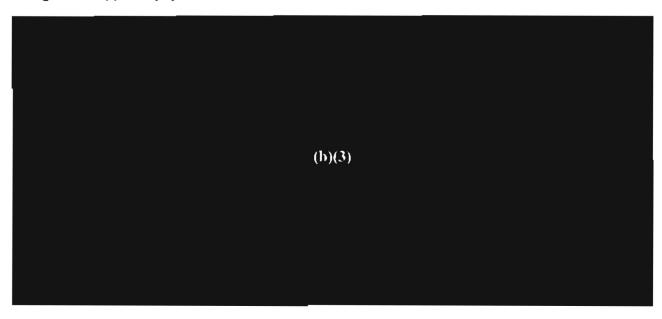(U) Platform: The platform is defined to consist of the mobile mooring station, tether, air vehicle and ground support equipment.



MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

(U) Primary Road. Two or more lanes, all weather, maintained, hard surfaced(paved) roads with good driving visibility used for heavy and high density traffic. These roads have lanes with a minimum width of 2.75 m(108 inches), road crown to 2 degrees and the legal maximum gross vehicle weight/gross combat weight(GVW/GCW) for the country or state is assured for all bridges. The Munson Test Area High Speed Paved Road Course and the Perryman Area High Speed Paved Road Course at Aberdeen Proving Ground (APG) are representative of primary roads.

(b)(3)

- (U) Probability of evaluation: The probability that the JLENS Orbit will correctly identify a detected threat object as a potential threat
- (U) Probability of successful transfer: The probability that the JLENS Orbit will correctly transfer data between the Surveillance System and Fire Control System.
- (U) Radar (JP 1-02) A radio detection device that provides information on range, azimuth and / or elevation of objects.
- (U) Radar Coverage (JP 1-02) The limits within which objects can be detected by one or more radar stations.

(b)(3)

(b)(3)

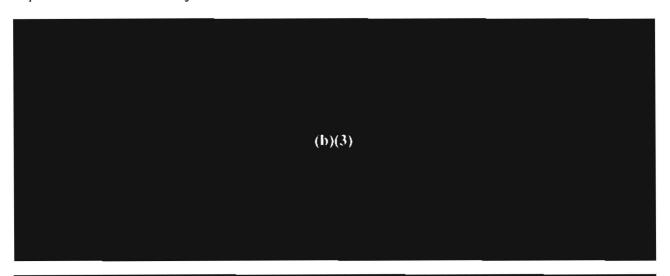
- (U) Radar Horizon (JP 1-02) The locus of points at which the rays from a radar antenna become tangential to the Earth's surface. On the open sea this locus is horizontal but on land it varies according to the topographical features of the terrain.
- (U) Range The radial distance from a radar to a target or other object.
- (U) Real time (JP 1-02, NATO) Pertaining to the timeliness of data or information which has been delayed only by the time required for electronic communication. This implies that there are no noticeable delays.
- (U) Reliability. The probability that a system will complete its mission. When assuming an exponential failure distribution, reliability can be computed by the following equation:

$$REL = e^{\frac{-MD}{MTBSA}}$$

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

MD = duration of mission day(hours) MTBSA = mean time between system aborts.


- (U) Reserve Capacity: The portion of available processing resources (throughput and memory) not required for handling the worse case load.
- (U) Road Hazard. A natural entity that may cause damage to the JLENS Orbit while being transported. Man-made hostile threats are excluded.
- (U) Saturation Alleviation: Measures taken to prevent overload of the JLENS Orbit resulting in performance degradation.
- (U) Secondary Road. Two lanes, all weather, occasionally maintained, hard or loose surface(e.g., large rock, paved, crushed rock, gravel) intended for medium-weight, low density traffic. These roads have lanes with minimum width of 2.5 m(98.5 inches) and no guarantee that the legal maximum GVW/GCW for the country or state is assured for all bridges. The Munson Test Area Improved Gravel Road Course and Belgian Block Course, in addition to the Perryman Area Secondary Road, Course A and Course B at Aberdeen Proving Ground(APG) are representative of secondary roads.



(b)(3)

- (U) Surface Moving Targets (SMT): Any land vehicles or maritime / naval vessels moving on the surface with characteristics defined in Appendix A of this document.
- (U) State: A first-level defined system descriptive status.
- (U) Surveillance (JP 1-02) The systematic observation of aerospace, surface or subsurface areas, places, persons, or things, by visual, aural, electronic, photographic, or other means.

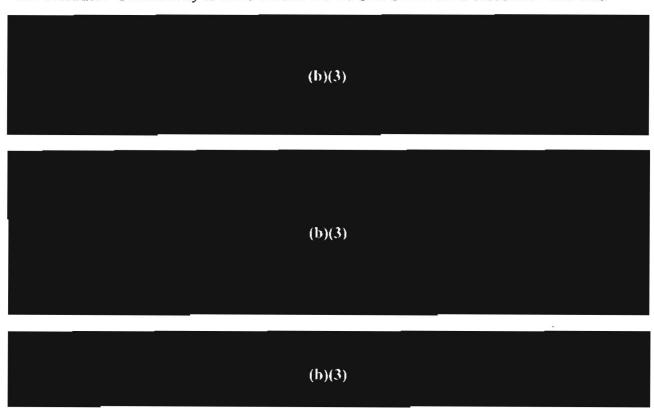- (U) Survivability (JP 1-02) (1) Includes all aspects of protecting personnel, weapons, and supplies while simultaneously deceiving the enemy. (2) Encompasses planning and locating position sites, designing adequate overhead cover, analyzing terrain conditions and construction materials, selecting excavation methods, and countering the effects of direct and indirect fire weapons. (DoD 5000.2-R) The capability of a system and crew to avoid or withstand a manmade hostile environment without suffering an abortive impairment of its ability to accomplish its designated mission.
- (U) Survive The ability of the JLENS systems to be repaired and return to full operations within the allocated MTTR after exposure to any one event which impairs the ability of a JLENS System to perform Mission Critical Functions.
- (U) Susceptibility (DoD 5000.2-R) The degree to which a weapon system is open to effective attack due to one or more inherent weakness. (Susceptibility is a function of operational tactics, countermeasures, probability of enemy fielding a threat, etc.). Susceptibility is considered a subset of survivability.
- (U) System Aborts. Failures of mission essential functions(failures that prevent the JLENS System from continuing its mission).
- (U) Tactical Information Broadcast Service (TIBS) TIBS provides theater commanders with current electronic order of battle and limited air situation display to enhance mission planning and execution. Connectivity to TIBS is achieved via SATCOM / LOS broadcast / data link.





- (U) Threat (AR 71-9) Ability of an enemy, or potential enemy, to limit, neutralize, or destroy effectiveness of current or projected mission, organization, or item of equipment.
- (U) Track (JP 1-02) (1) A series of related contacts displayed on a data display console or other display device. (2) To display or record the successive positions of a moving object. (3) To lock onto a point of radiation and obtain guidance therefrom. (4) To keep a gun properly aimed, or to point continuously a target-locating instrument at a moving target. (5) The actual path of an aircraft above, or a ship on, the surface of the Earth. The course is the path that is planned; the track is the path that is actually taken. (USAADASCH) A computer generated representation of a moving object, displayed either in terms of geographical position, vector, and both.
- (U) Track Data: Values or parameters that constitute a state vector.
- (U) Tracking Following a selected target (or targets) in range, angle, or Doppler frequency (or some combination of these).
- (U) TTP. Tactics, Techniques, and Procedures. Tactics are based on doctrinal concepts which units apply in combat. Tactics include the ordered placement and maneuver of units in relation to each other, the enemy, and terrain to obtain decisive results. Techniques are based on tactics which small units, crews, or individuals apply to a given set of circumstances(such as battle drills and crew drills). Procedures are courses or modes of action that describe how to perform certain tasks. This is the lowest level of detail. Task-level performance requires one or more procedures.(CGSC Student Text 101-5, "Command and Staff Decision Processes")
- (U) Turbulence (FM 34-81-1) A condition of the atmosphere in which air currents vary greatly over short distances. Turbulence may occur at any altitude, and the intensity may vary rapidly over short distances. See wind shear.

(b)(3)



- (U) United States Message Text Format (USMTF) The USMTF program establishes the standards and prescribes the rules and conventions governing message text formats. The program applies to all character-oriented message text formats used in support of Joint and Combined operations. The USMTFs are both human readable and machine processable. They provide information exchange through vocabulary control (standardized data elements) and provide uniform reporting procedures to be used in all defense conditions.
- (U) Unmanned Aerial Vehicle (UAV) (JP 3-55-1) A powered aerial vehicle that does not carry a human operator, uses aerodynamic forces to provide lift, can fly autonomously or be piloted remotely, can be expendable or recoverable, and can carry a lethal or non-lethal payload. Ballistic or semi-ballistic, cruise missiles, and artillery projectiles are not considered UAVs.
- (U) Unmanned Combat Aerial Vehicles (UCAV) –Recoverable systems that use a UAV as a delivery platform for expendable ordnance. Includes concepts for air-to-air and air-to-surface munition delivery.
- (U) Valid Aerial Track (b)(3) Pertains to differentiating between aerial objects of (potential) interest versus other objects.
- (U) Valid Reportable Track (b)(3) Any track which meets the criteria established for track reporting on a network (e.g., JDN).
- (U) Very Low A height below (b)(3)
- (U) Vulnerability (JP 3-13) The characteristics of a system that cause it to suffer a definite degradation (loss or reduction of capability to perform the designated mission) as a result of having been subjected to a certain (defined) level of effects in an unnatural (man-made) hostile environment. Vulnerability is considered a subset of survivability. In information operations, a weakness in information system security design, procedures, implementation, or internal controls that could be exploited to gain unauthorized access to information or an information system.



MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

4,

6.3 (U) Acronyms.

AAC	Approach Angle Control
ABSOJ	Airborne Standoff Jammer
AC	Alternating Current
ADP	Aerostat Development Program
ADSAM	Air Directed Surface-to-Air Missile
AGL	Above Ground Level
Ai	Inherent Availability
AM	Amplitude Modulation
AMDPCS	Air and Missile Defense Planning and Control Station
AMRAAM	Advanced Medium Range Air-to-Air Missile
Ao	Operational Availability
C2	Command and Control
C4I	Command, Control, Communications, Computers, and Intelligence
C4ISR	Command, Control, Communications, Computers, Intelligence, Surveillance, and Reconnaissance
CEC	Cooperative Engagement Capabilities
CEP	Cooperative Engagement Processor
CES	Common Equipment Set
CHS	Common Hardware and Software
CID	Combat Identification
cm	Centimeters
CM	Cruise Missile
CMF	Common Message Format
CNR	Combat Net Radio
COMMs	Communications
COMSEC	Communication Security
COTS	Commercial Off-The-Shelf
CW	Continuous Wave
CWI	Continuous Wave Illumination
DC	Direct Current
DDS	Data Distribution System
DFAD	Digital Feature Analysis Data
DIA	Defense Intelligence Agency
DII	Defense Information Infrastructure
DII COE	Defense Information Infrastructure Common Operating Environment

DIS	Distributed Interactive Simulation
DISN	Defense Information Systems Network
DISR	DoD Interoperability Standards Registry
dm	Data Mile
DoD	Department of Defense
DT	Downtime
DTED	Digital Terrain Elevation Data
ECCM	Electronic Counter-Countermeasure
ECM	Electronic Countermeasure
EED	Electro-Explosive Device
EID	Electrically-Initiated Device
EM	Electromagnetic
EMI	Electromagnetic Interference
EO	Engagement Operations
	(b)(3)
ERP	Effective Radiated Power
EU	European Union
f	Frequency
FFT	Fast Fourier Transform
FM	Frequency Modulation
FOUO	For Official use only
FSC	Federal Supply Code
G	Gravitational Constant
GATM	Global Air Traffic Management
GFE	Government Furnished Equipment
GHz	Gigahertz
GIC	Gabarit International de Chargement
gm	Gram
GOTS	Government Off-The-Shelf
gpm	Gallons Per Minute
GPS	Global Positioning System
GS/DS	General Support / Direct Support
GSE	Ground Support Equipment
	(b)(3)
HERO	Hazards of Electromagnetic Radiation to Ordnance
HF	High Frequency
H-H	Horizontal - Horizontal
HLA	High Level Architecture

HPRF	High Pulse Repetition Frequency
hr	Hour
HWIL	Hardware-In-The-Loop
Hz	Hertz
ICC	Information Coordination Central
ICW	Interrupted Continuous Wave
IETM	Interactive Electronic Technical Manuals
IFC	Integrated Fire Control
IFF	Identification Friend or Foe
IFR	Instrumented Flight Rules
IHPRF	Interrupted High Pulse Repetition Frequency
IIU	Inertial Instrument Unit
INFOSEC	Information Security
IPT	Integrated Product Team
IPv4	Internet Protocol Version 4
IPv6	Internet Protocol Version 6
JCTN	Joint Composite Tracking Network
JDN	Joint Data Network
JHU	John Hopkins University
JLENS	Joint Land Attack Cruise Missile Defense Elevated Netted Sensor
	System
JMNS	Joint Mission Need Statement
JPO	Joint Project Office
JPS	JLENS Performance Specification
JROC	Joint Requirement Oversight Council
JS2	JLENS - Spiral 2
JSPEC	JLENS Specification
JTA	Joint Technical Architecture
JTAMD	Joint Theater Air and Missile Defense
JTIDS	Joint Tactical Information Distribution System
JVMF	Joint Variable Message Format
Kg	Grazing Angle Adjustment
kHz	kilohertz
km	kilometer
km	kilometer
km/hr	kilometers Per Hour
KP	Polarization Adjustment
kts	knots

kVA	Lile Welt America
LACM	kilo-Volt-Amps Land Attack Cruise Missile
LACMD	Land Attack Cruise Missile Defense
LCR	Large Caliber Rockets
Low E	Low Elevation
LPE	Launch Point Estimated
LRU	Line Replacement Unit
LSB	Least Significant Bit
LTC	Lieutenant Colonel
	(b)(3)
MHz	Megahertz
MILSATCOM	Military Satellite Command
MIL-STD	Military Standard
MNS	Mission Needs Statement
MOPP	Mission Oriented Protective Posture
mph	Miles Per Hour
MSL	Mean Sea Level
MTBSA	Mean Time Between System Aborts
MTTR	Mean Time To Repair
NBC	Nuclear, Biological, and Chemical
NGT	Not Greater Than
NIMA	National Imagery and Mapping Agency
NLT	Not Less Than
NOFORN	Not Releaseable to Foreign Nationals
NSWC	Naval Surface Warfare Center
NTE	Not To Exceed
OADR	Originating Agency's Determination Required
OPSEC	Operational Security
ORD	Operational Requirements Document
OSHA	Occupational Safety and Health Administration
OT	Operational Time
OTH	Over-The-Horizon
PAC-3	Patriot Advanced Capability - 3
PCW	Pulsed Continuous Wave
PDETT	Probability of Detection, Evaluation, Transfer, and Track to intercept
PMCS	Preventive Maintenance Checks And Services
PPLI	Precise Participant Location Identification
	Parts Per Million

PT1	Probability of successful transfer within the system and to/from the data networks.
PT2	Probability of tracking target with sufficient accuracy
	(b)(3)
RCS	Radar Cross-Section
RF	Radio Frequency
RMS	Root Mean Square
RVM	Requirements Verification Matrix
	(b)(3) (b)(3)
SAM	Surface-to-Air Missile
SBAA	Shipboard Active Array
SBJ	Surface Based Jammer
SCDL	Surveillance Control Data Link
SDD	System Design and Development
	(b)(3)
SIAP	Single Integrated Air Picture
SIL	System Integration Laboratory
	(b)(3)
SLAMRAAM	Surface Launched Advanced Medium Range Air to Air Missile
SM	Standard Missile
SMDC	Space and Missile Defense Command
SMT	Surface Moving Targets
SRBM	Short Range Ballistic Missile
SSAA	System Security Authorization Agreement
	(b)(3)
STU	Secure Telephone Unit
SuR	Surveillance Radar
	(b)(3) (b)(3)
TAFIM	Technical Architecture Framework for Information Management
TAMD	Theater Air and Missile Defense
TASM	Tactical Air-to-Surface Missile
TBD	To Be Determined
TBM	Theater Ballistic Missile
TLE	Target Location Error
TMDE	Test, Measurement, and Diagnostic Equipment
111100	1 101) 1.11 marin, 1.11 - 1.12 marin - 1.12

TTP	Tactics, Techniques, and Procedures	
	(b)(3)	
UAV	Unmanned Aerial Vehicle	
UHF	Ultra High Frequency	
USAADASCH	United States Army Air Defense Artillery School	
USMCEB	U.S. Military Communications-Electronics Board	
USMTF/JVMF	United States Message Text Format (USMTF) and Joint Variable Message Format (JVMF).	
V/m	Volts Per Meter	
VMF	Variable Message Format	
V-V	Vertical - Vertical	
(b)(3)		
WCS	Weapon Control System	

Appendix A Target Threat (U)

A.0 (U) Threat Characteristics

(b)(3)

A.1 (U) ABT Target Characteristics

(U) Table A.1-1 summarizes the Stressing LACM threat characteristics.

Table A.1-1. (U) Stressing LACM Threat Characteristics

(b)(1)

(b)(1)


(U) Table A.1-2 summarizes the ABT characteristics and operational envelopes.

Table A.1-2. (U) ABT Threat Characteristics (b)(1)


A.2 (U) SMT Target Characteristics


(U) Table A.2-1 summarizes the SMT threat characteristics.

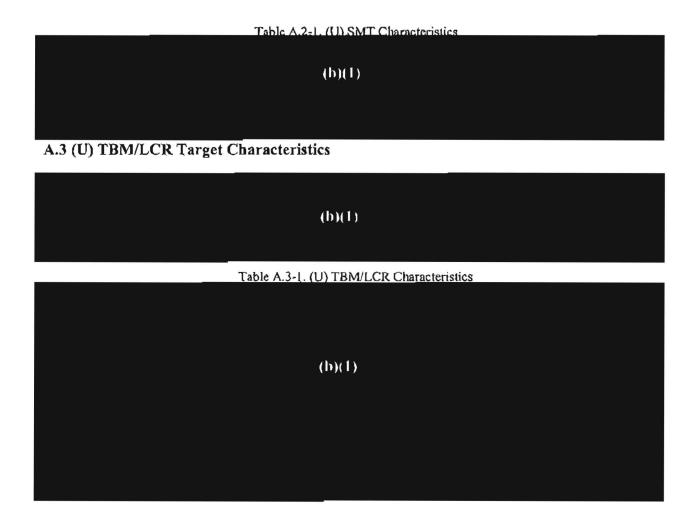A-1 SECRET/NOFORN



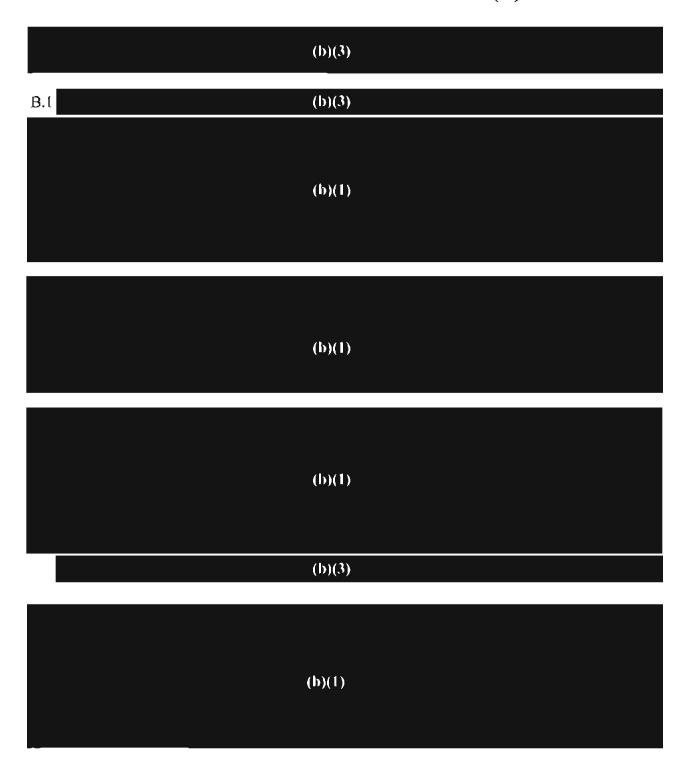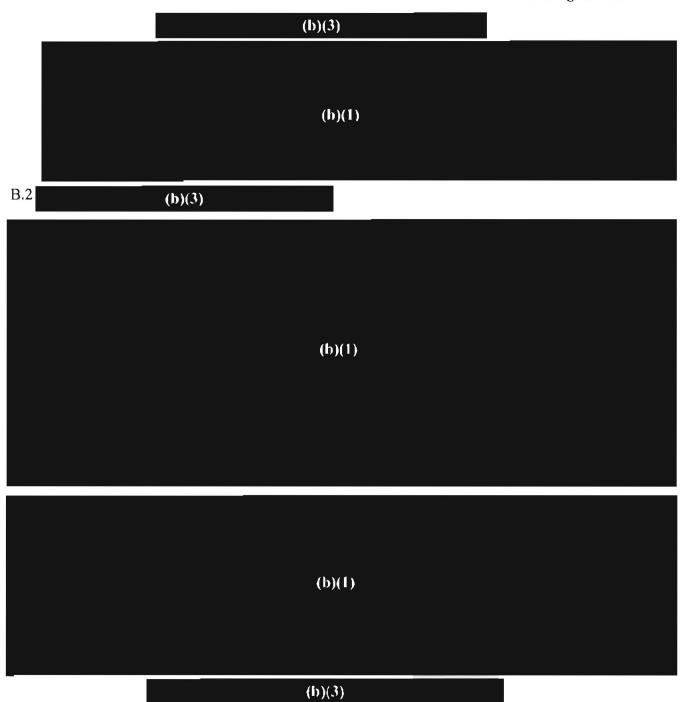Appendix B Electronic Countermeasure Threat (U)








Appendix C Clutter and Multipath (U)

C.1 (U) Land Clutter

C.1.1 (b)(3)

C.1.1.1 (b)(3)

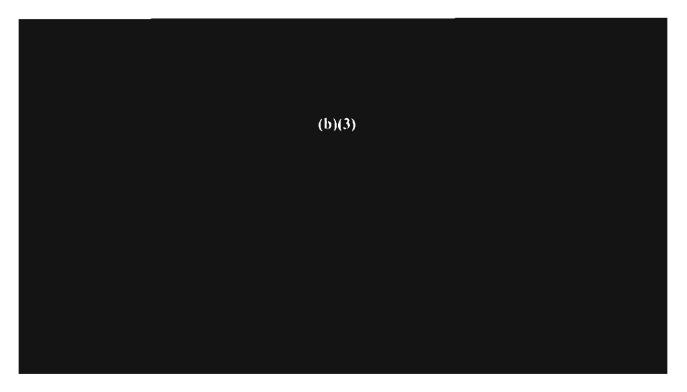C.1.1.1.1 (U) Wide Area Mean Scattering



C.1.1.1.2 (U) Statistical Variation

(b)(3)



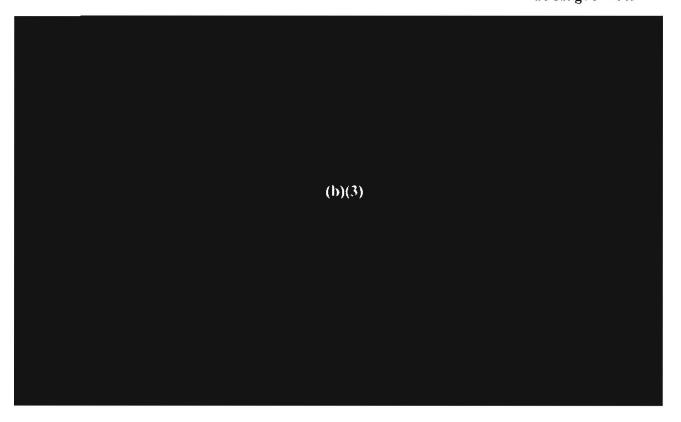


Table C.1.1.1.2-1. Slope Parameter of Compound Distribution (U)

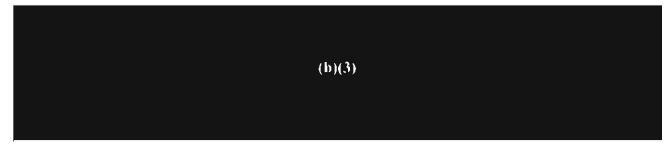

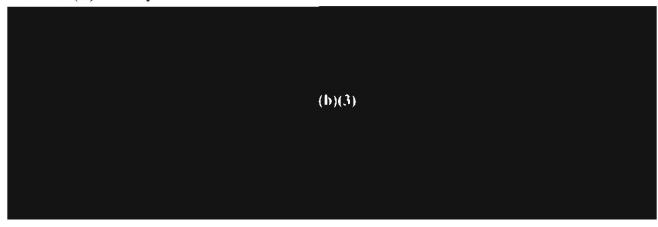


C.1.1.3 (U) Velocity Distribution




C.2 (U) Sea Clutter



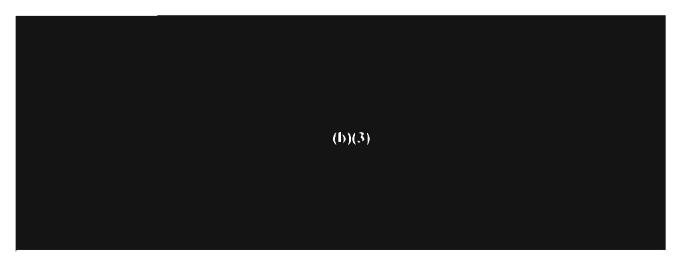C.2.1.1.1 (U) Wide Area Mean Scattering




C-3 SECRET/NOFORN

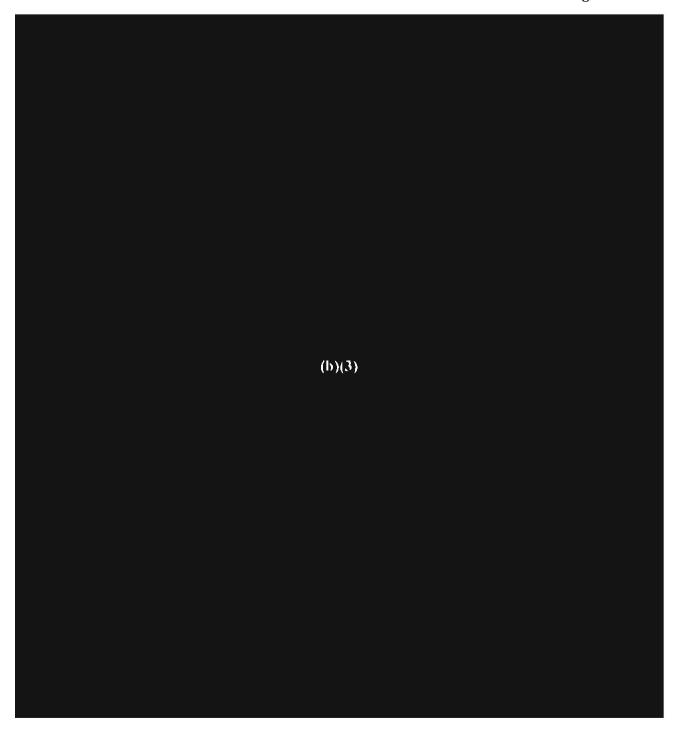


C.2.1.1.2 (U) Statistical Variation



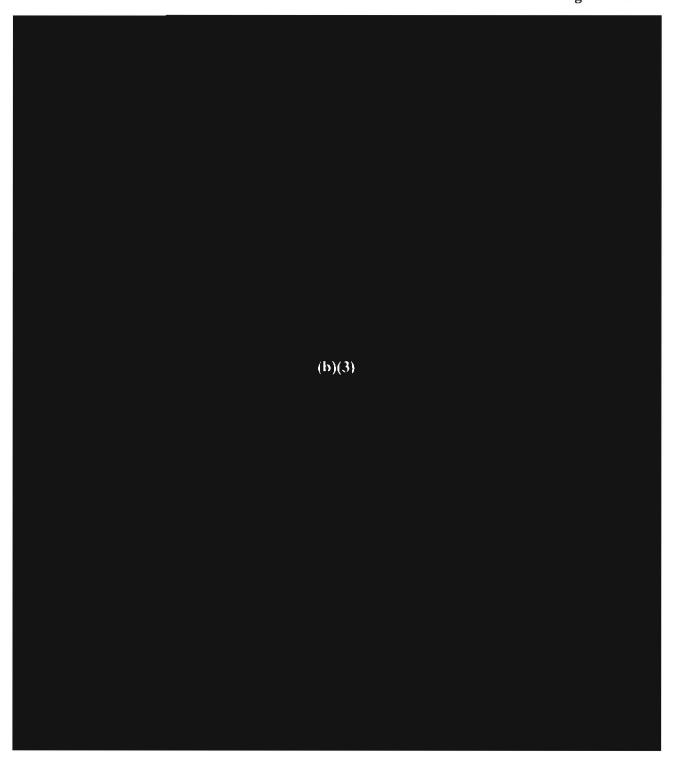

C.2.1.3 (U) Velocity Distribution

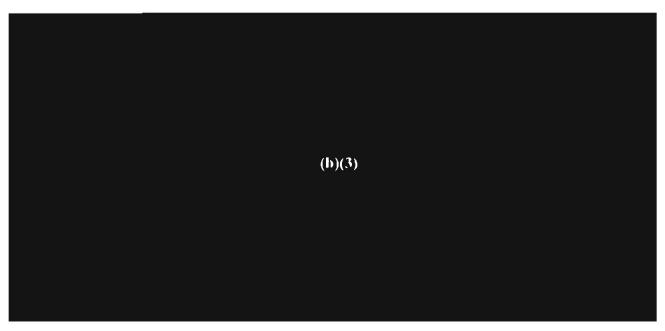

C.3 (U) Rain Clutter

C.3.1 (U) Spatial Extent and Distribution of Rain




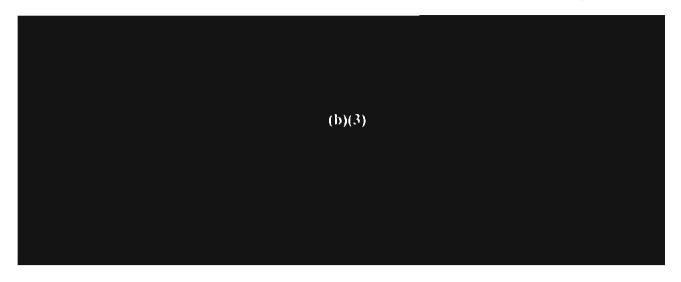



Table C.3.2-1. Example of Reflectivity Values for Rain (U)

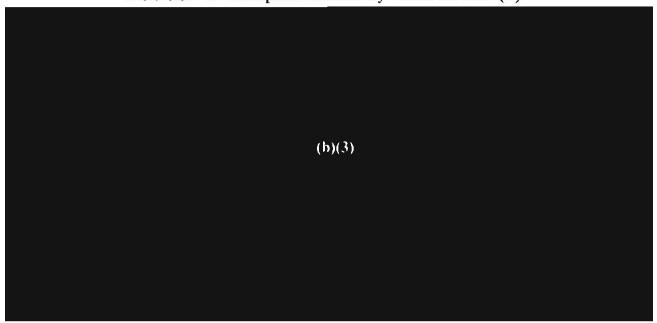


C.3.3 (U) Velocity Distribution




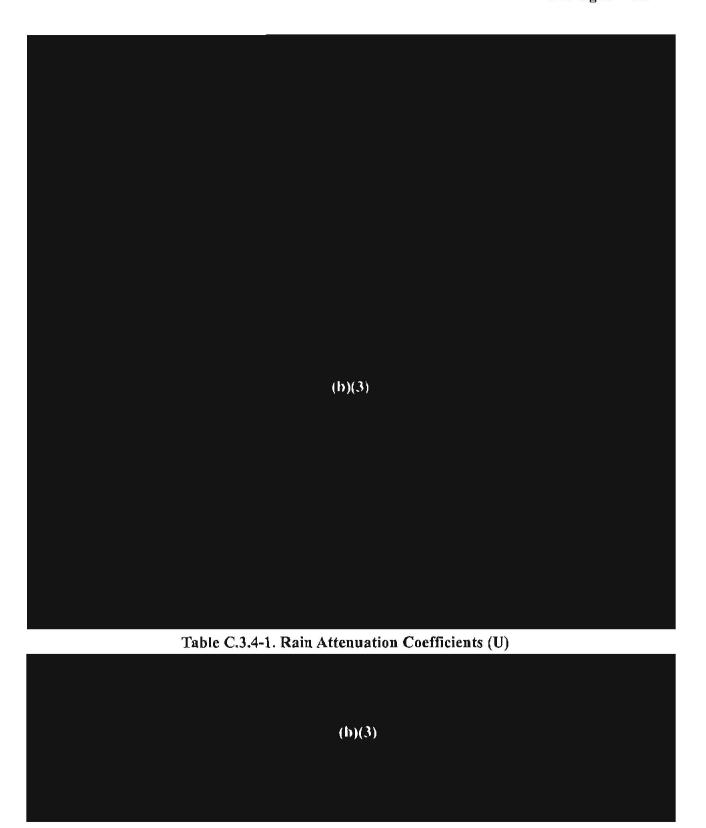C-7 SECRETANOFORN



C.4 (U) Biological Clutter

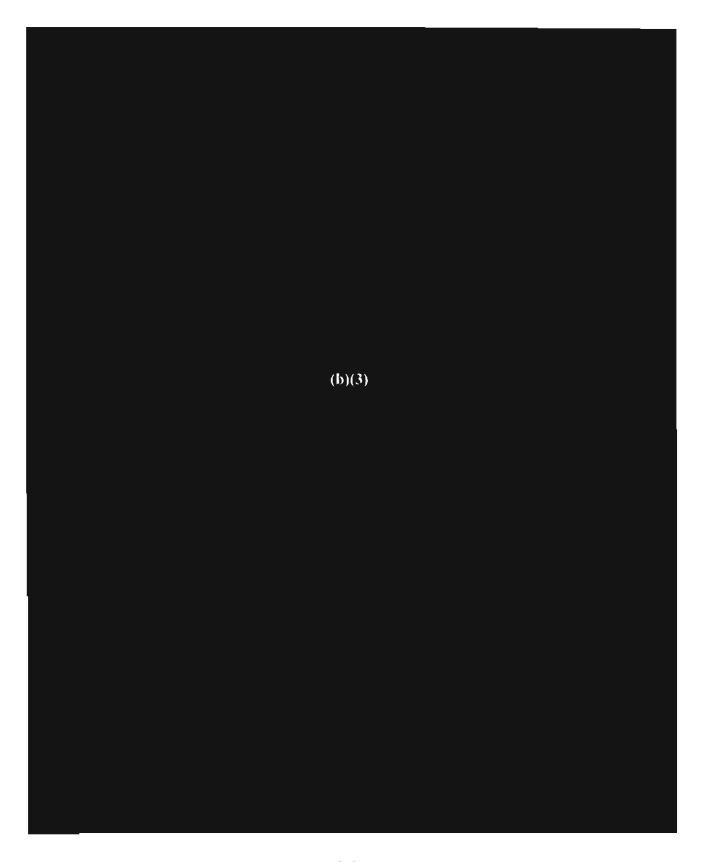

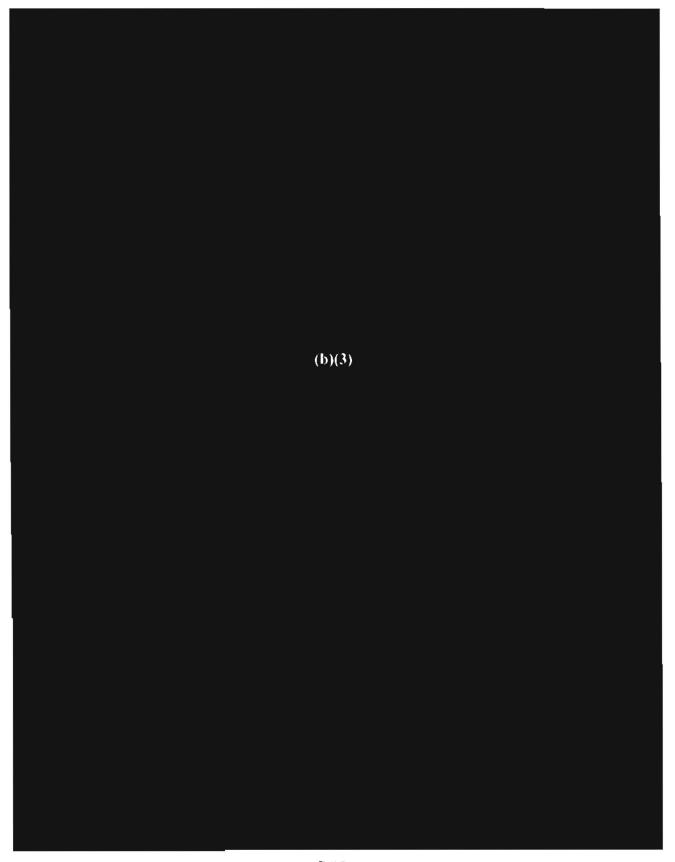




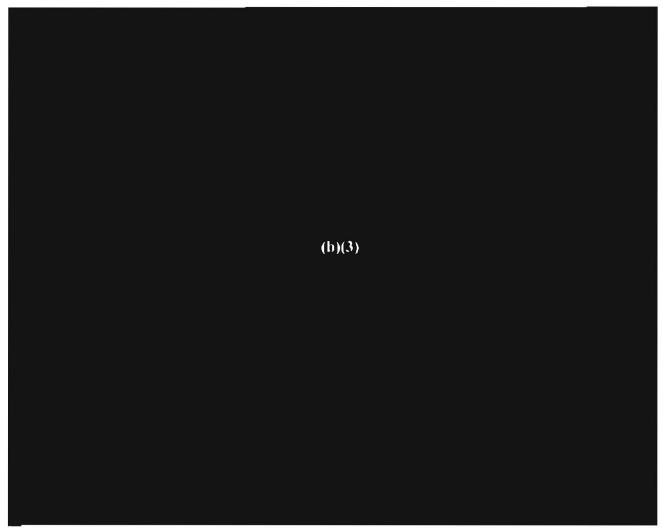



Table C.5-1. Electromagnetic Properties of Sea Water (U)

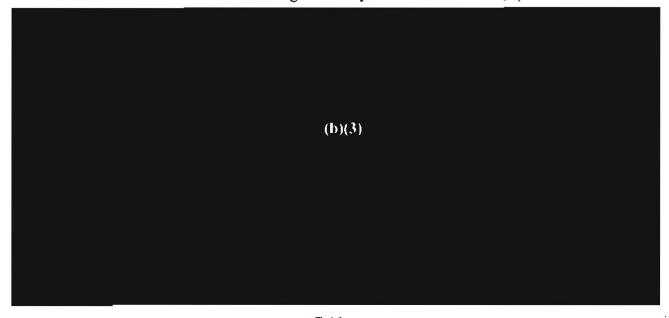


C-11 SECRET/NOFORN



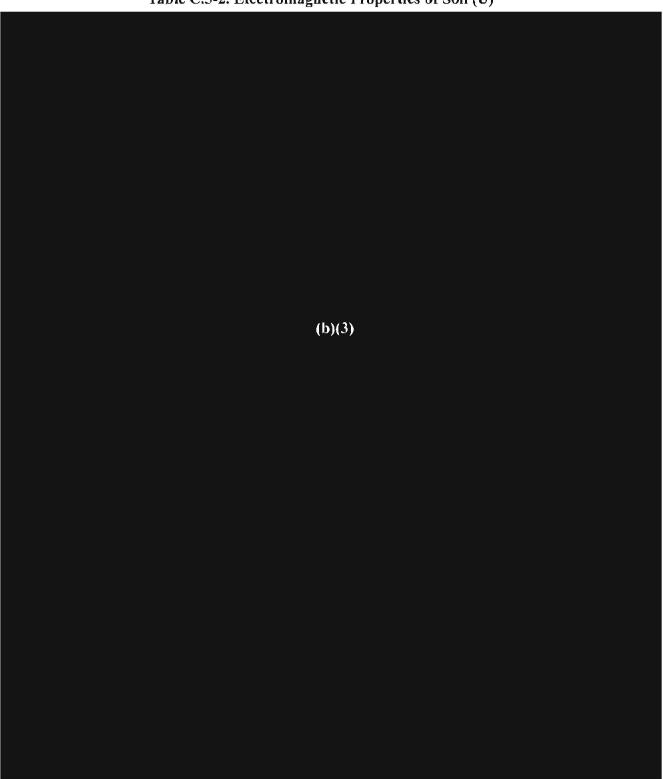

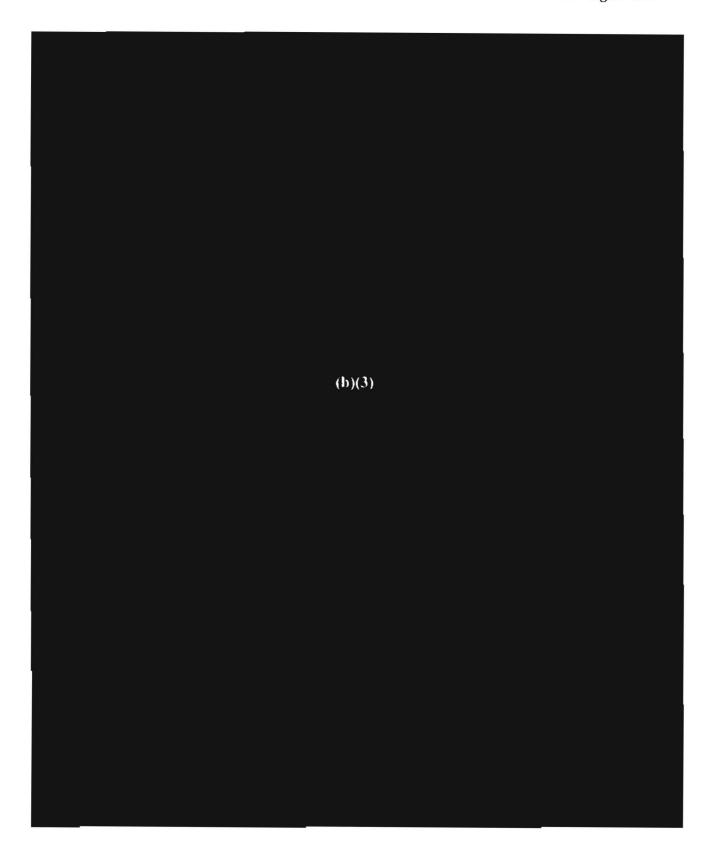

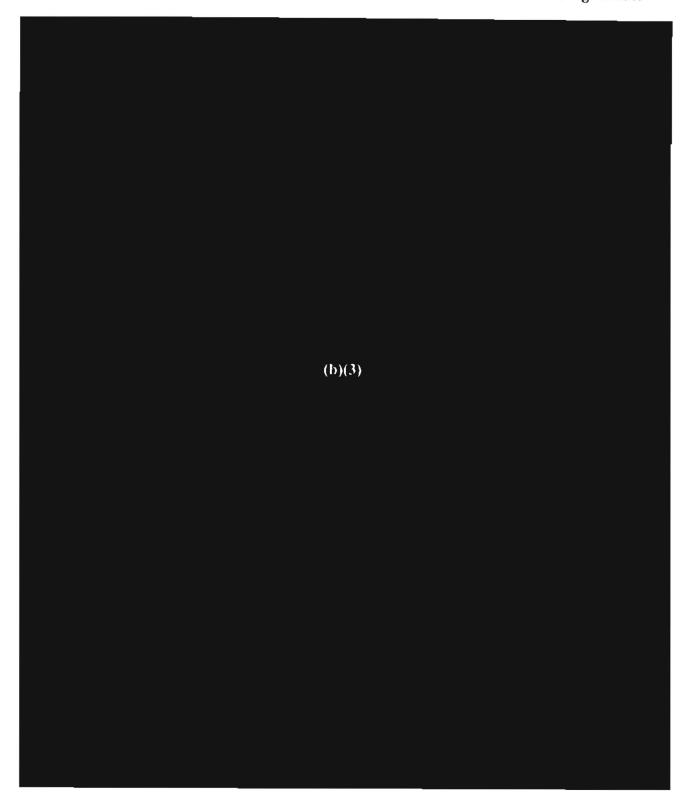

C-14 SECRET/NOFORN

Appendix D

Weapon Systems (U)

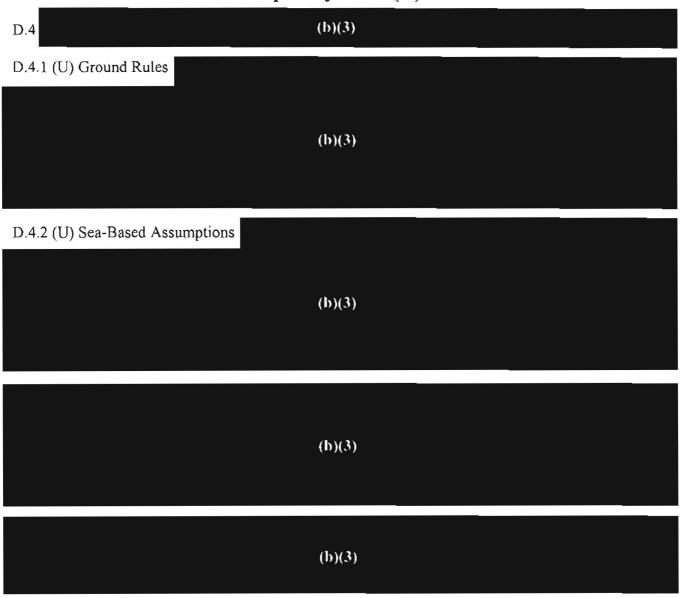
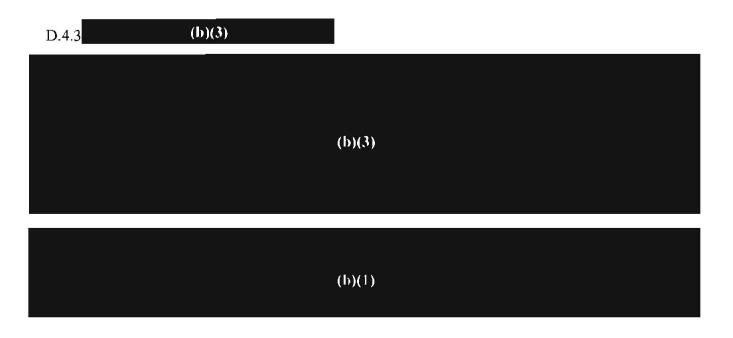
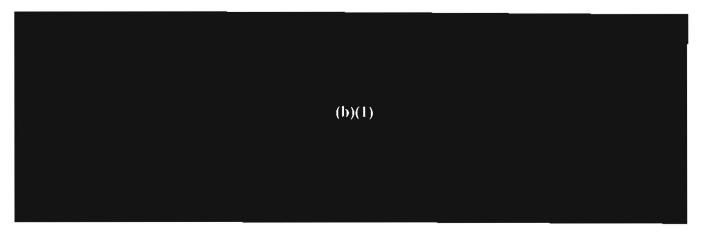


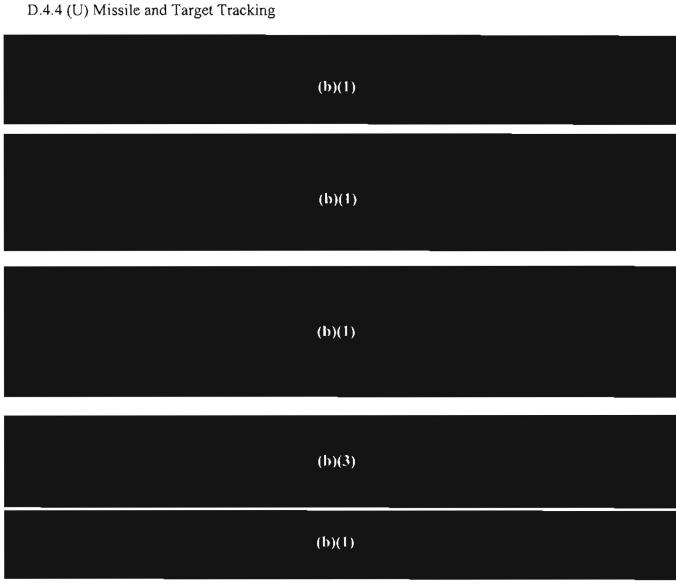


Figure D.4.2-1. (U) Notional CEC Interfaces [O]



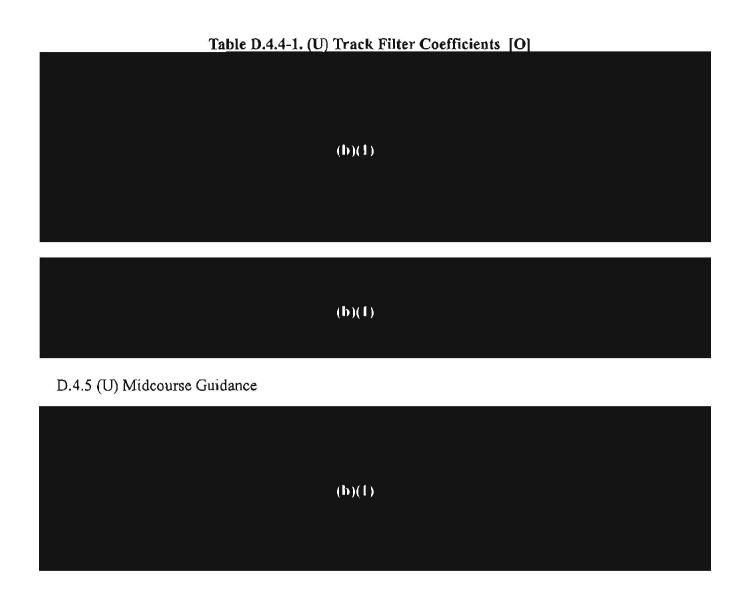
D-2 SECRET/NOFORN






D-3 **SECRET/NOFORN**


SECRET/NOFORN




SECRET/NOFORN

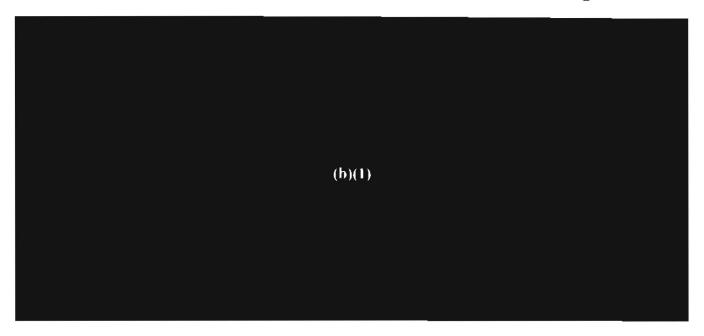



D.4.6 (U) Illuminator

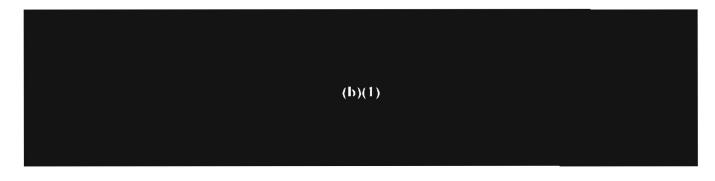

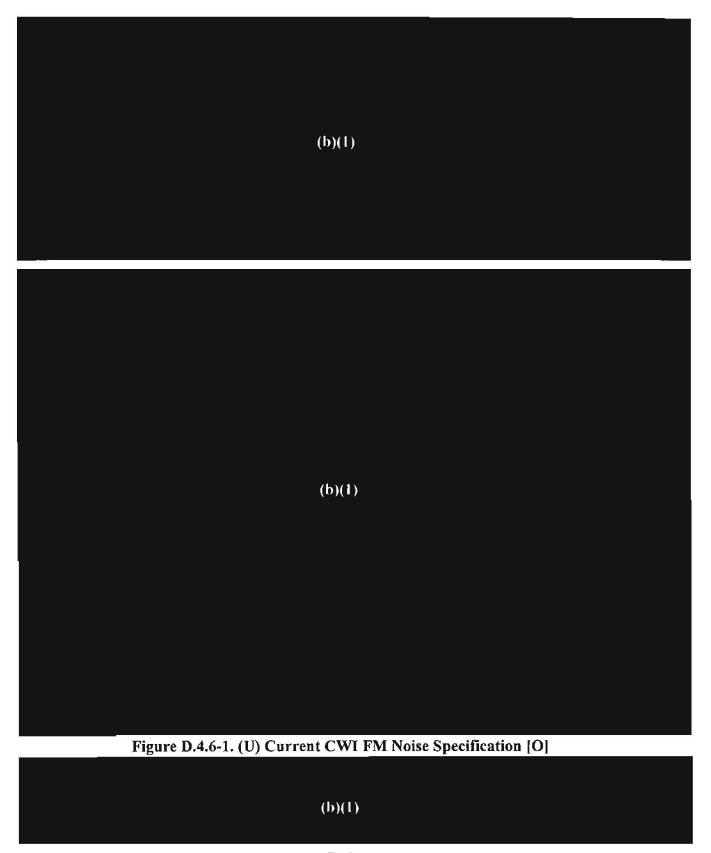


D-6 SECRET/NOFORN

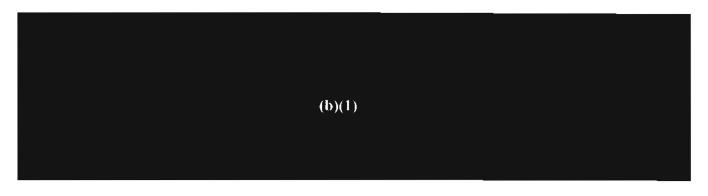


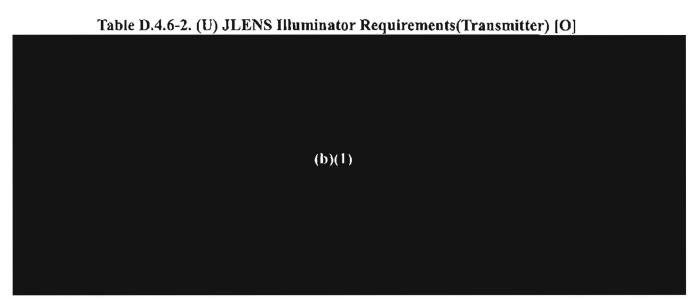




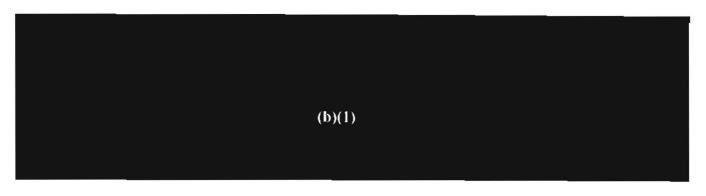


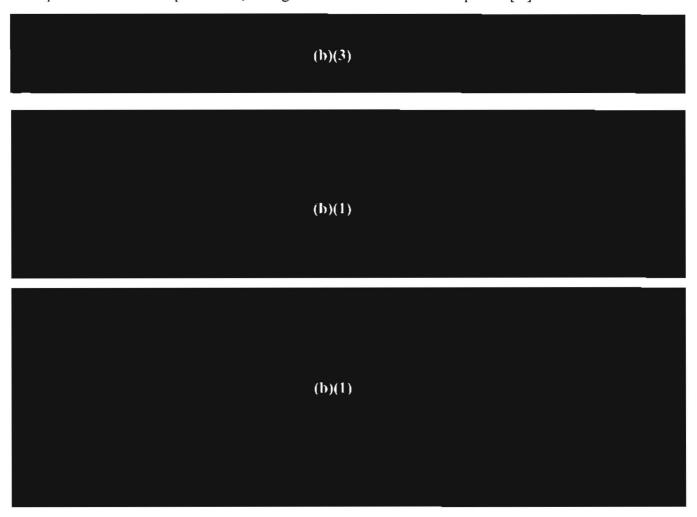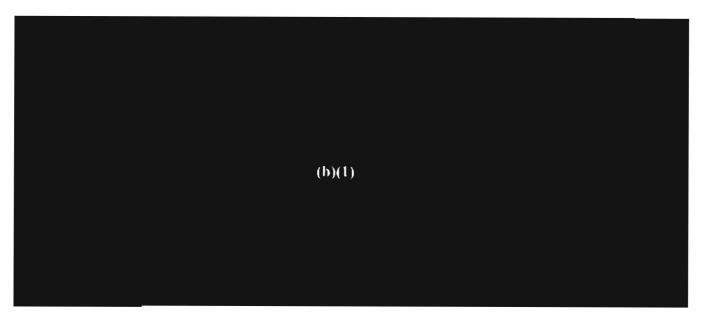
(U) It should be recognized that these times assume the seeker head is slewing continuously and that Fast Fourier Transform(FFT) data collection and analysis are performed asynchronously. If a step search shall be implemented, a longer search time would be required. [O]






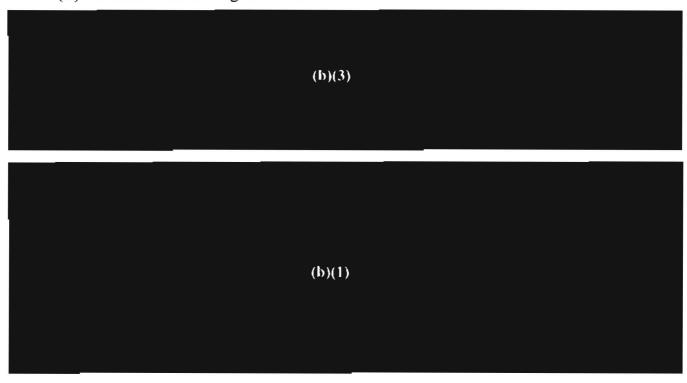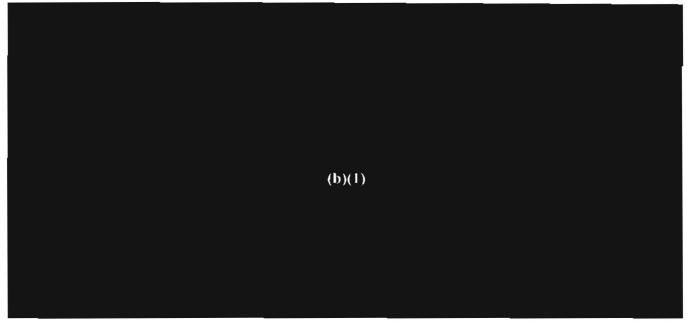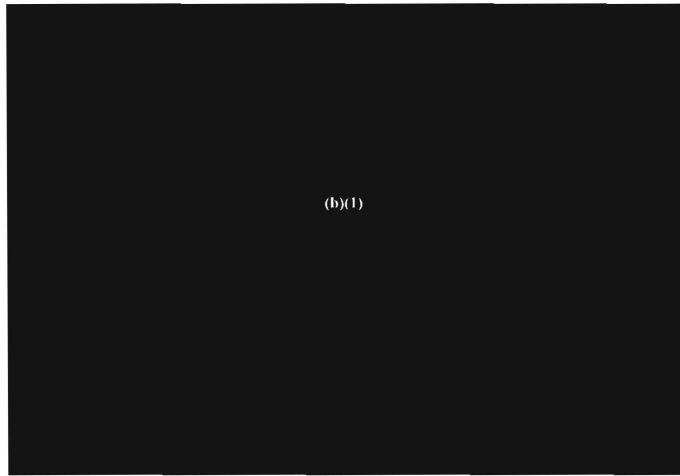
D.4.8 (U) Terminal Receiver / Signal Processor








D-10 SECRET/NOFORN

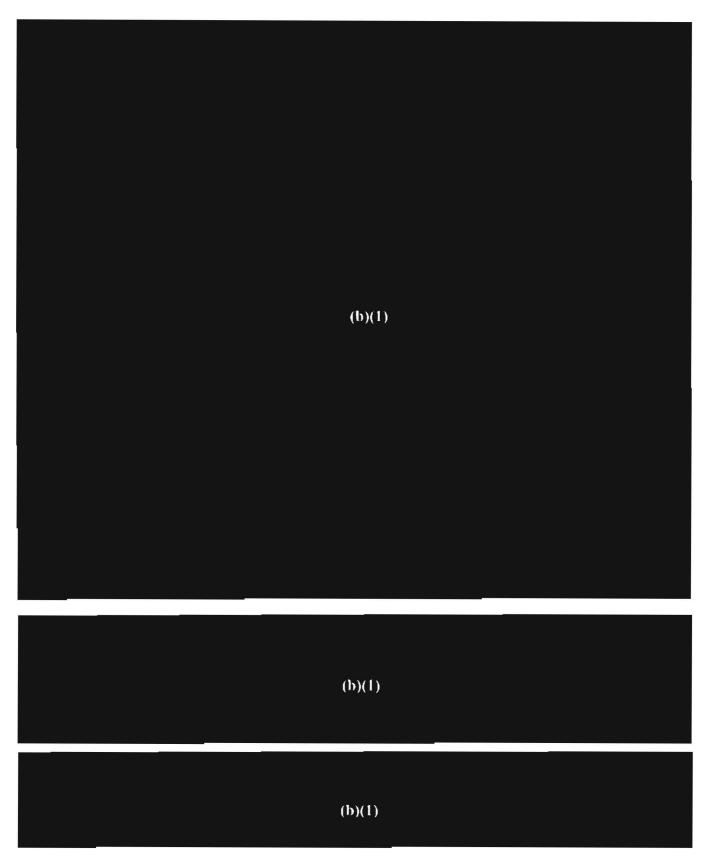

D-11 SECRET/NOFORN

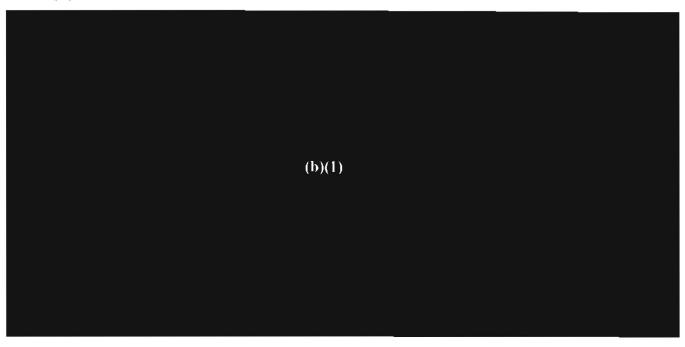D.4.9 (U) Gridlock



- (U) The following random JLENS system errors shall be included in the random JLENS system precision track illumination sensor measurement error used for error basket calculations [O]:
 - a. short-term(random) attitude(pitch, roll, and yaw) errors
 - b. short-term(random) platform flexure

D.4.10 (U) Time Delays

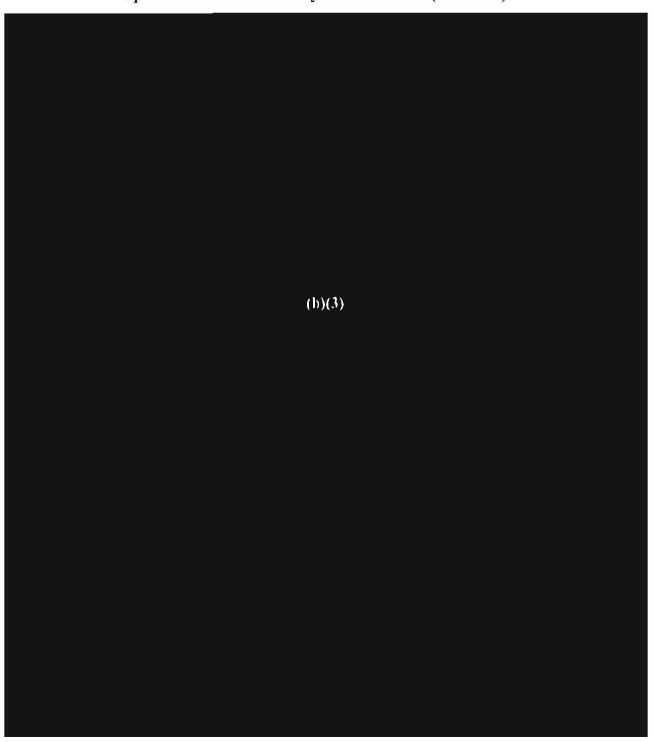


Table D.4.10-1. (U) Data Transfer Time Delays [O]

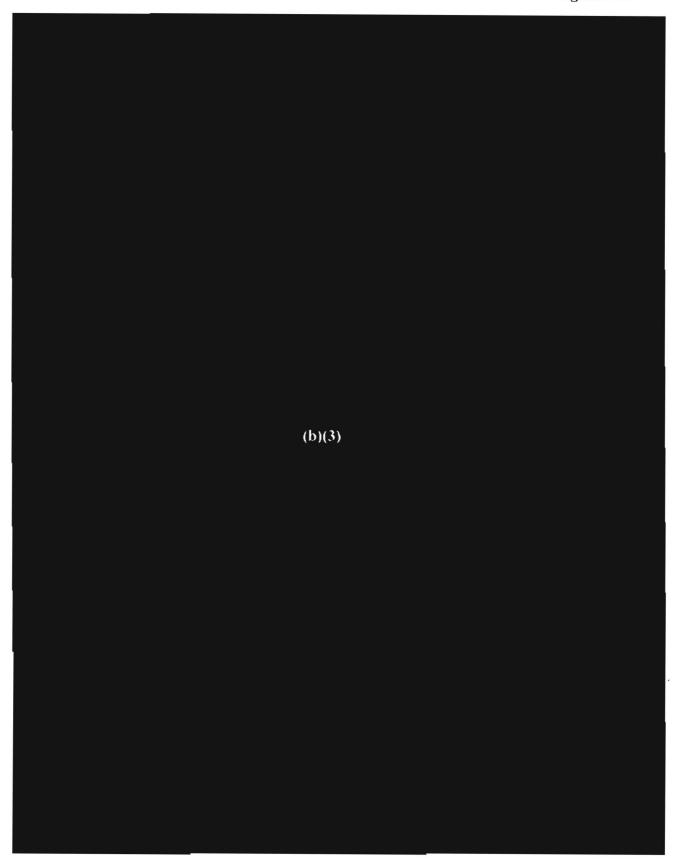
(b)(1)

(U) Appendix E


Joint Land Attack Elevated Netted Sensor (JLENS) Operational Mode Summary/Mission Profile (OMS/MP)




E-1 SECRET/NOFORN




E-2 SECRET/NOFORN

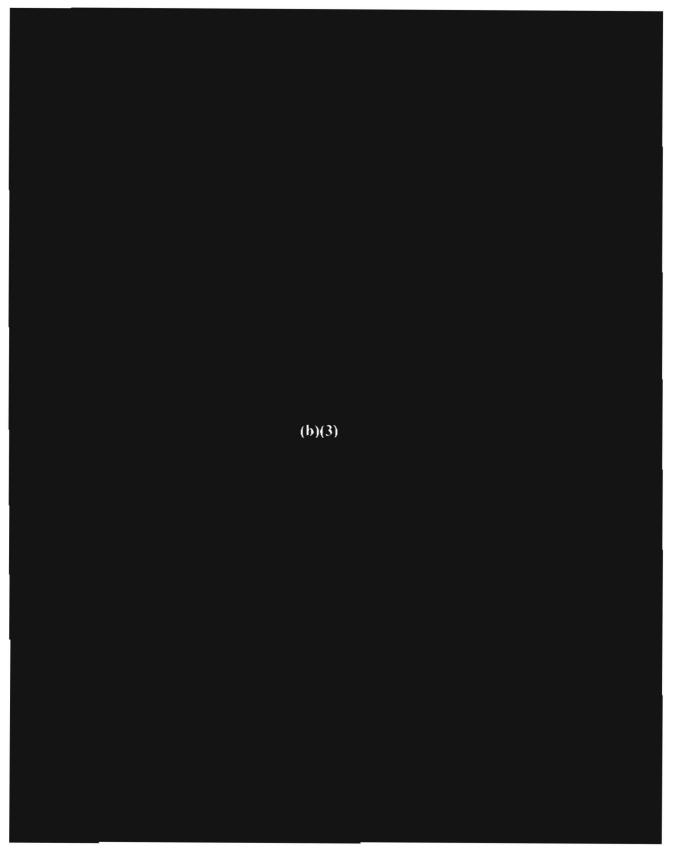


E-3 SECRET/NOFORN

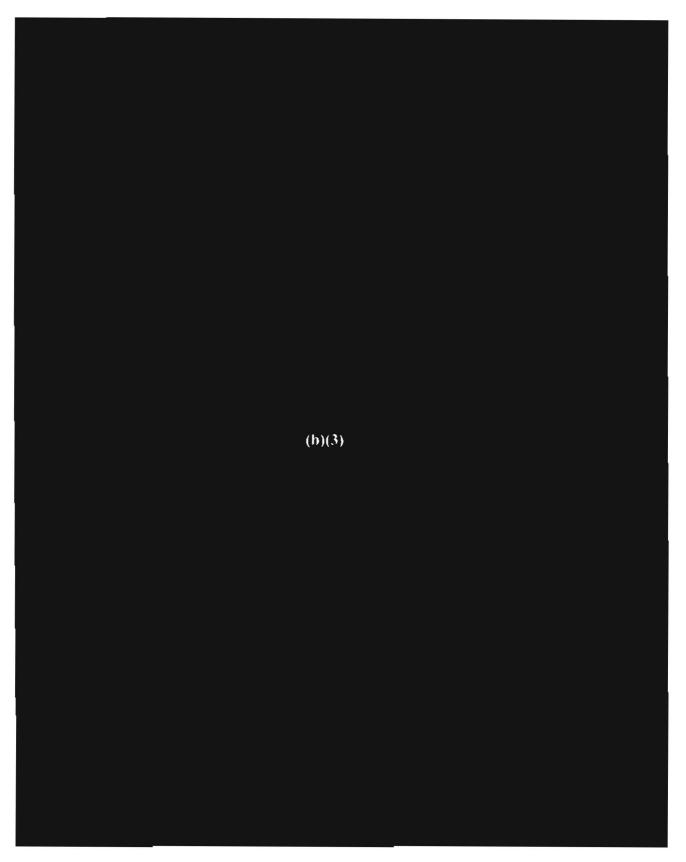


E-4 SECRET/NOFORN

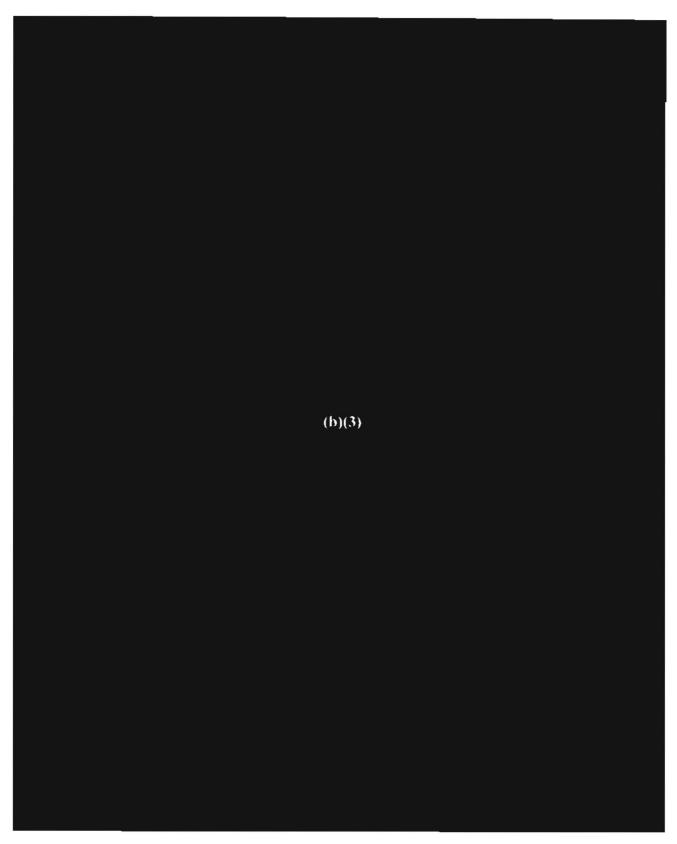

E-5 SECRET/NOFORN

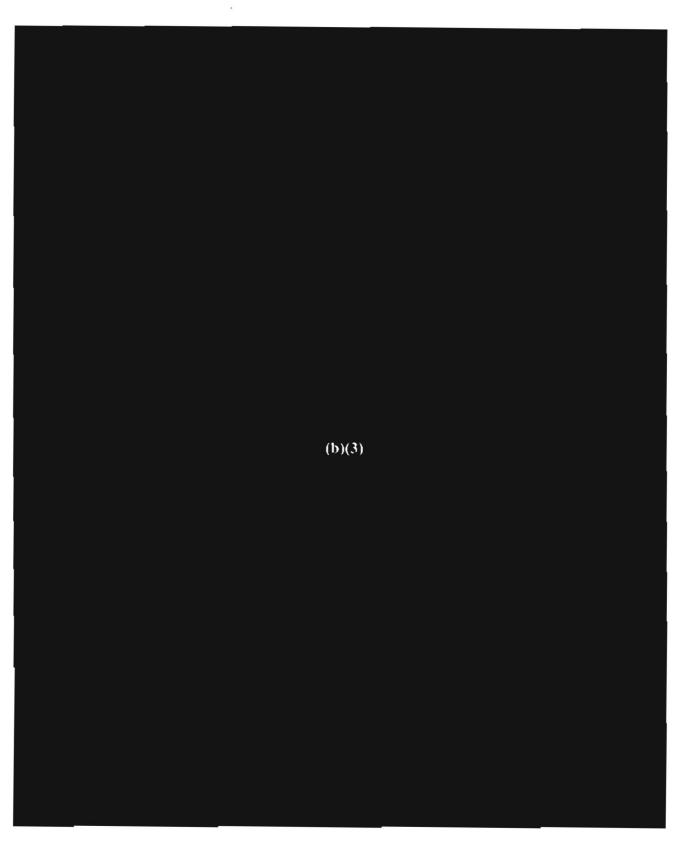

E-6 SECRET/NOFORN

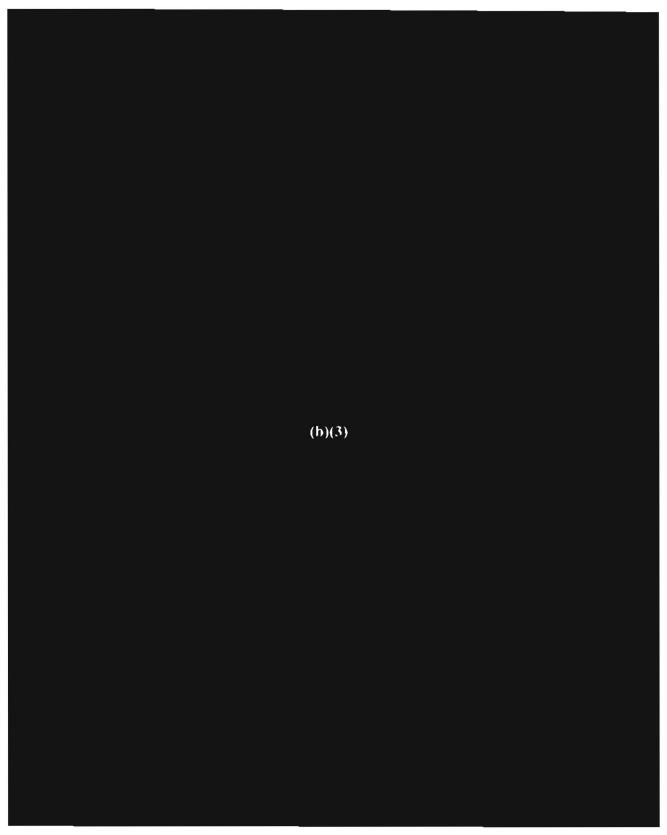

E-7 SECRET/NOPORN

SECRET/NOFORN

MIS-PRF-55628 Rev B CAGE Code 18876 18 August 2009

CUSTODIAN: Army-MI

ERR MI-N3884

